

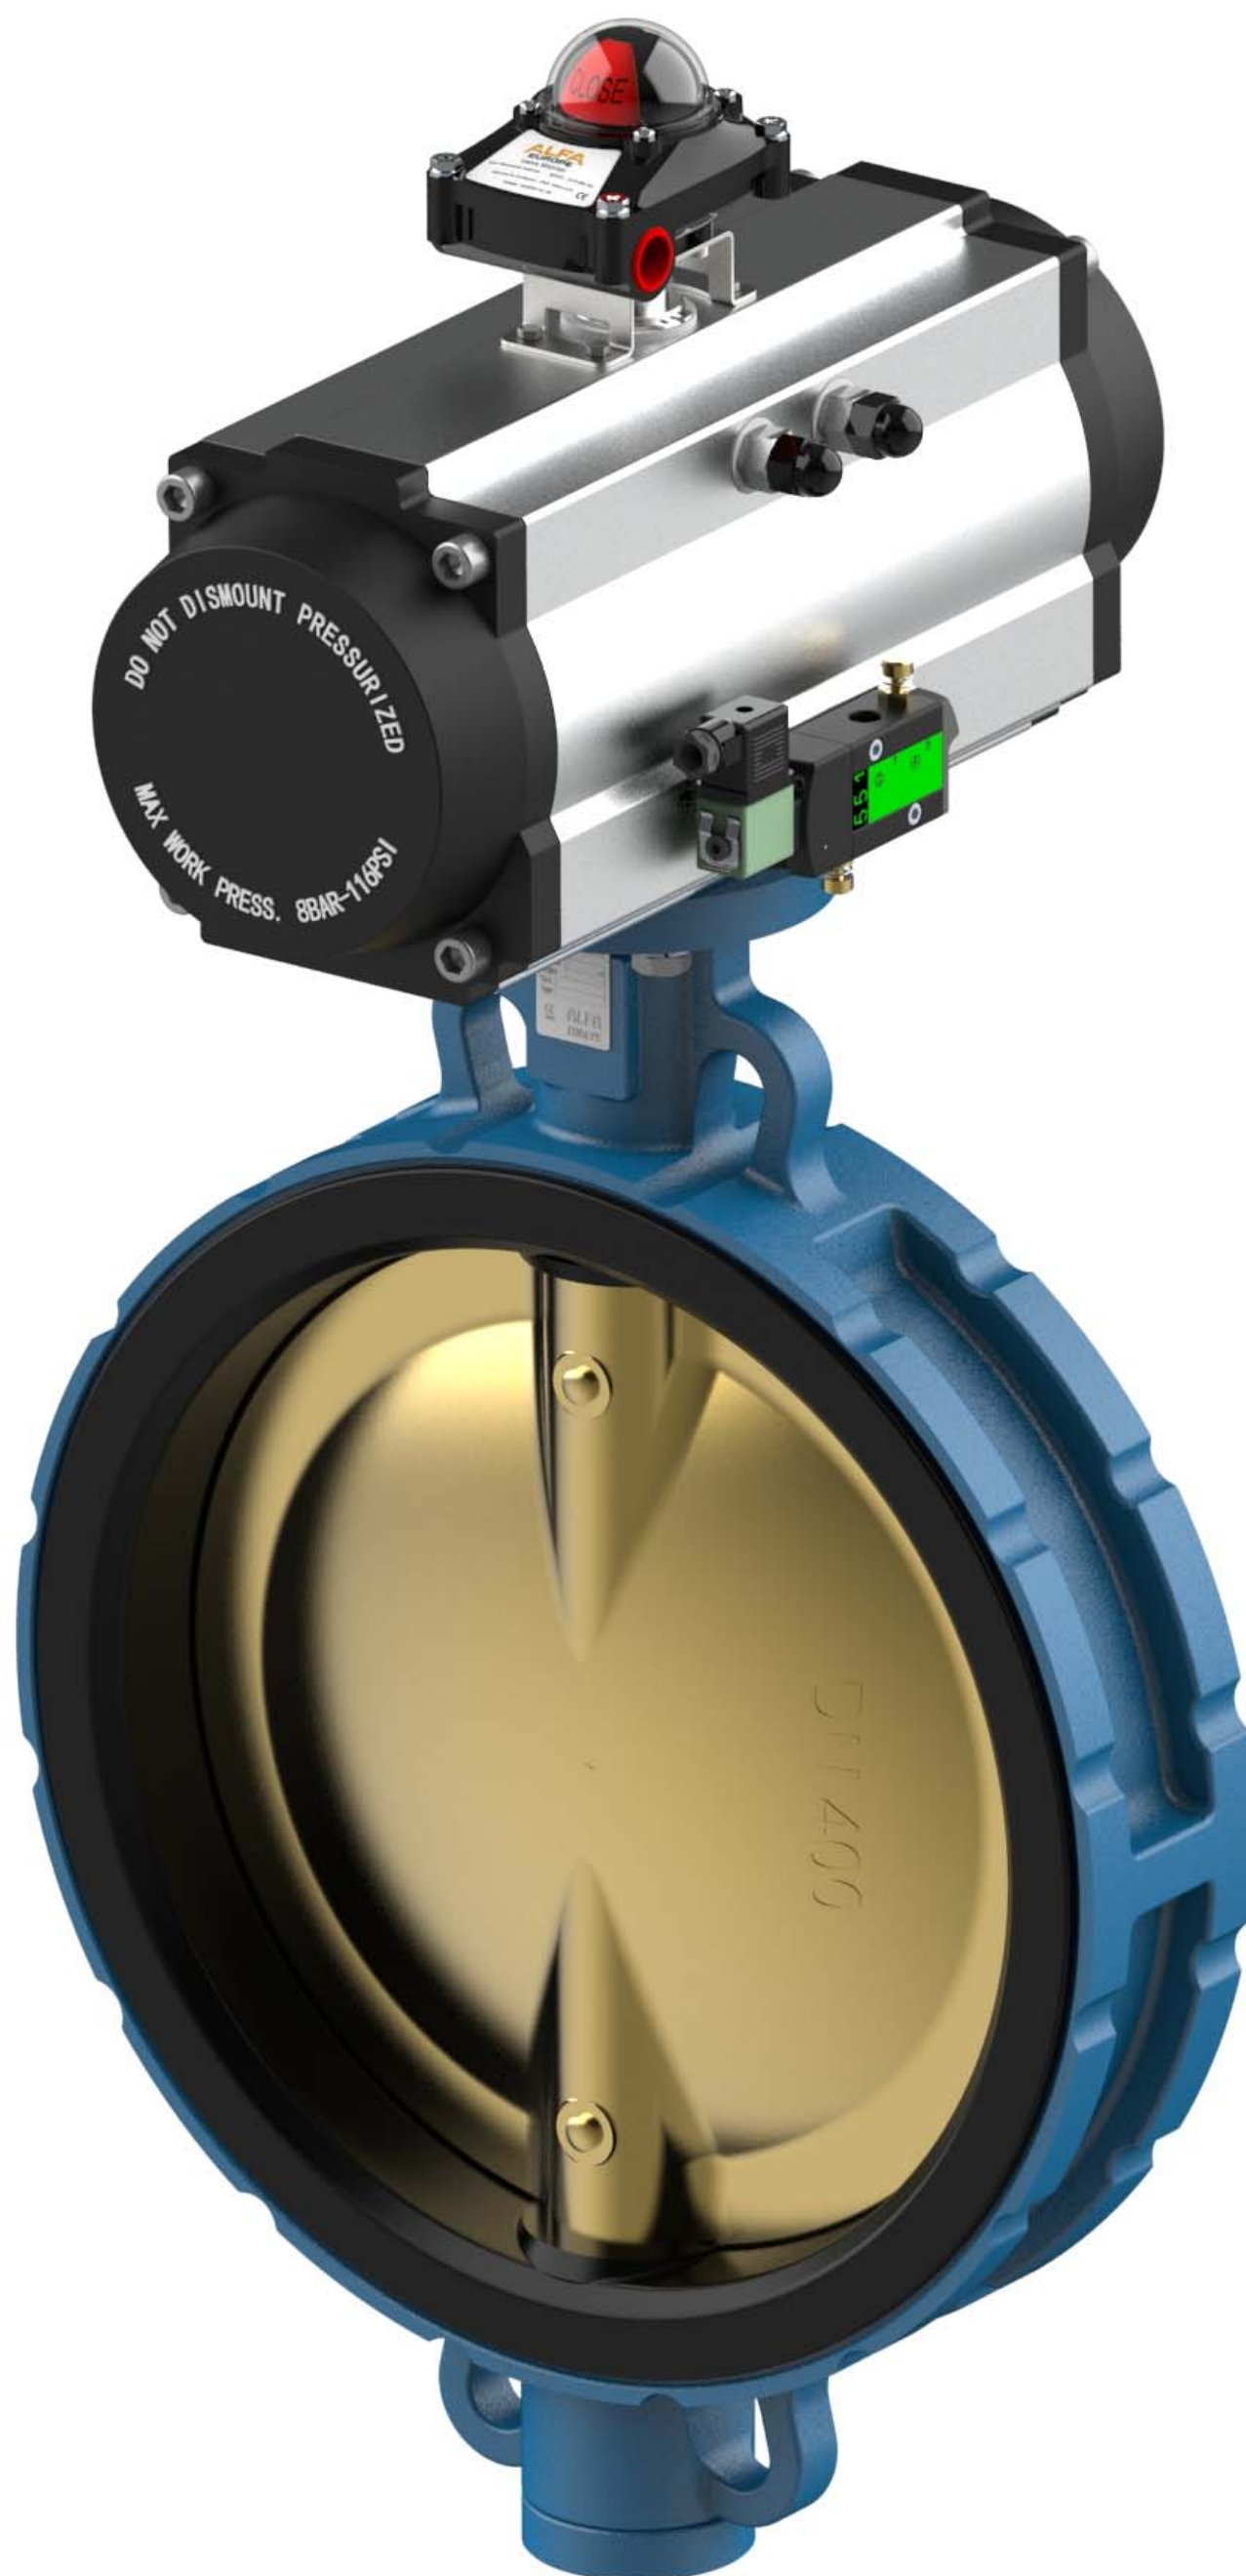


WAFER TYPE S57 PNEUMATIC ACTUATOR (DA)

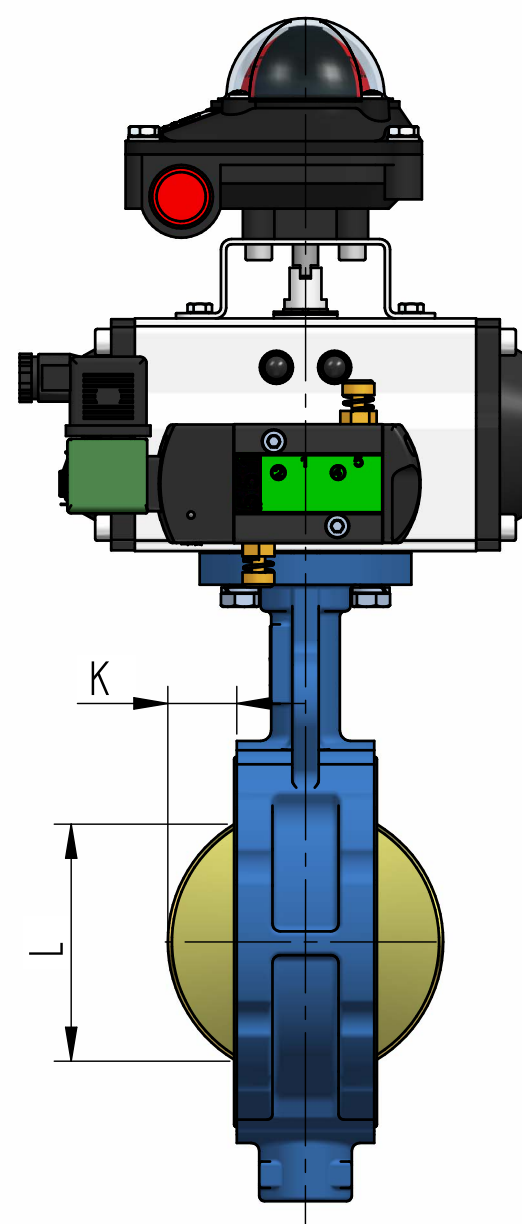


WAFER TYPE S57 - PNEUMATIC ACTUATOR (DA) DN40 - DN300 10 Bar

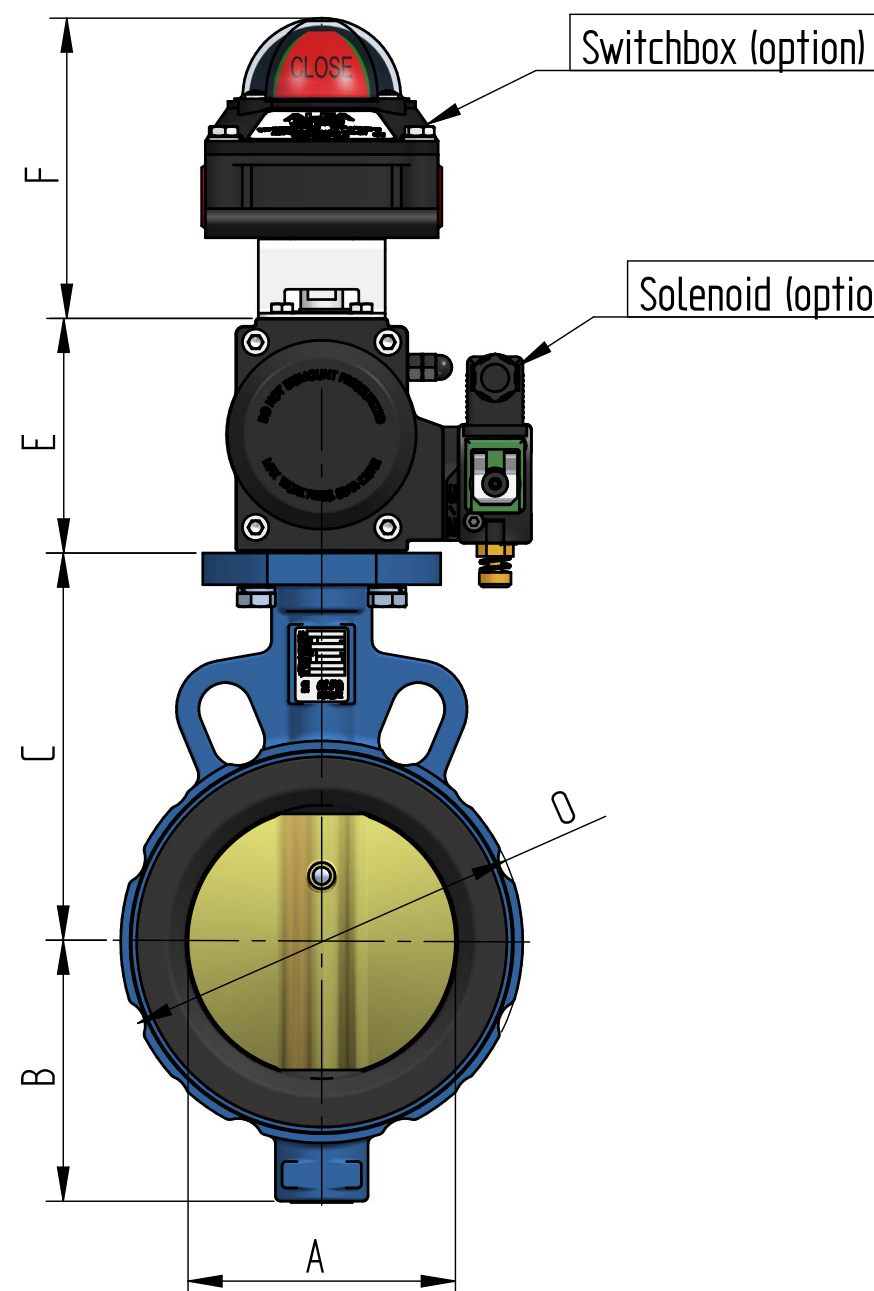

Standard available materials :			
BODY	DISC	SHAFT	SEAT
EN-GJS-400-15	BS 1400 AB2	SS 431	NBR -15°C / +80°C
A216 WCB	Duplex 2205	SS 420	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	Super Duplex 2507	SD F53	Silicone -40°C / +250°C


Size DN 40 to DN 150, Design EN593
Face to face acc. EN558.1 series 20
Flange connections: DIN PN 6-10-16
ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
Pressure rating: up to 16 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute

Min. Air supply
pressure 6 bar.

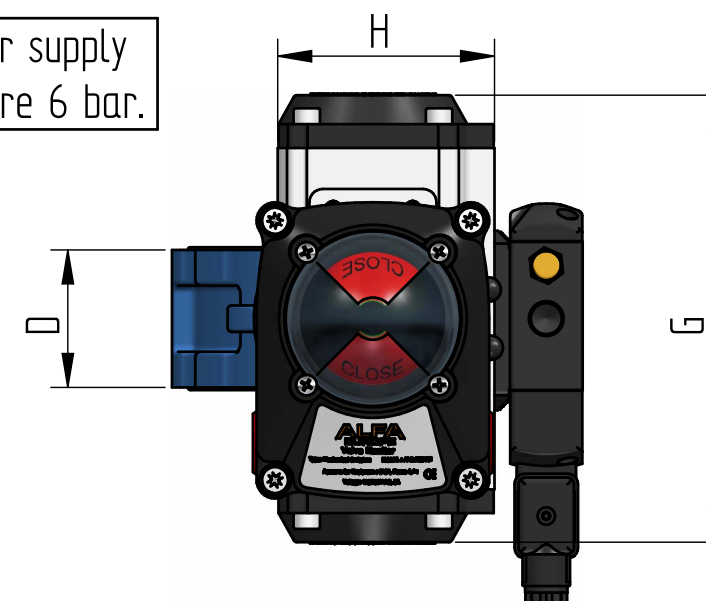


Size	PNEUMATIC	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 40	ALFA - 063 D	41	58	113	33	88	114	169	82	4	24	72	4.6
DN 50	ALFA - 063 D	52	65	118	43	88	114	169	82	5	27	93	5.9
DN 65	ALFA - 063 D	63	89	126	46	88	114	169	82	9	43	108	6.9
DN 80	ALFA - 063 D	78	96	133	46	88	114	169	82	16	62	124	7.1
DN 100	ALFA - 063 D	103	113	147	52	88	114	169	82	26	90	152	8.5
DN 125	ALFA - 075 D	125	130	160	56	100	114	201	94	34	110	177	11.2
DN 150	ALFA - 083 D	155	146	180	56	108	114	209	101	50	145	210	13.7

WAFER TYPE S57 - PNEUMATIC ACTUATOR (DA) DN200 - DN400 10 Bar

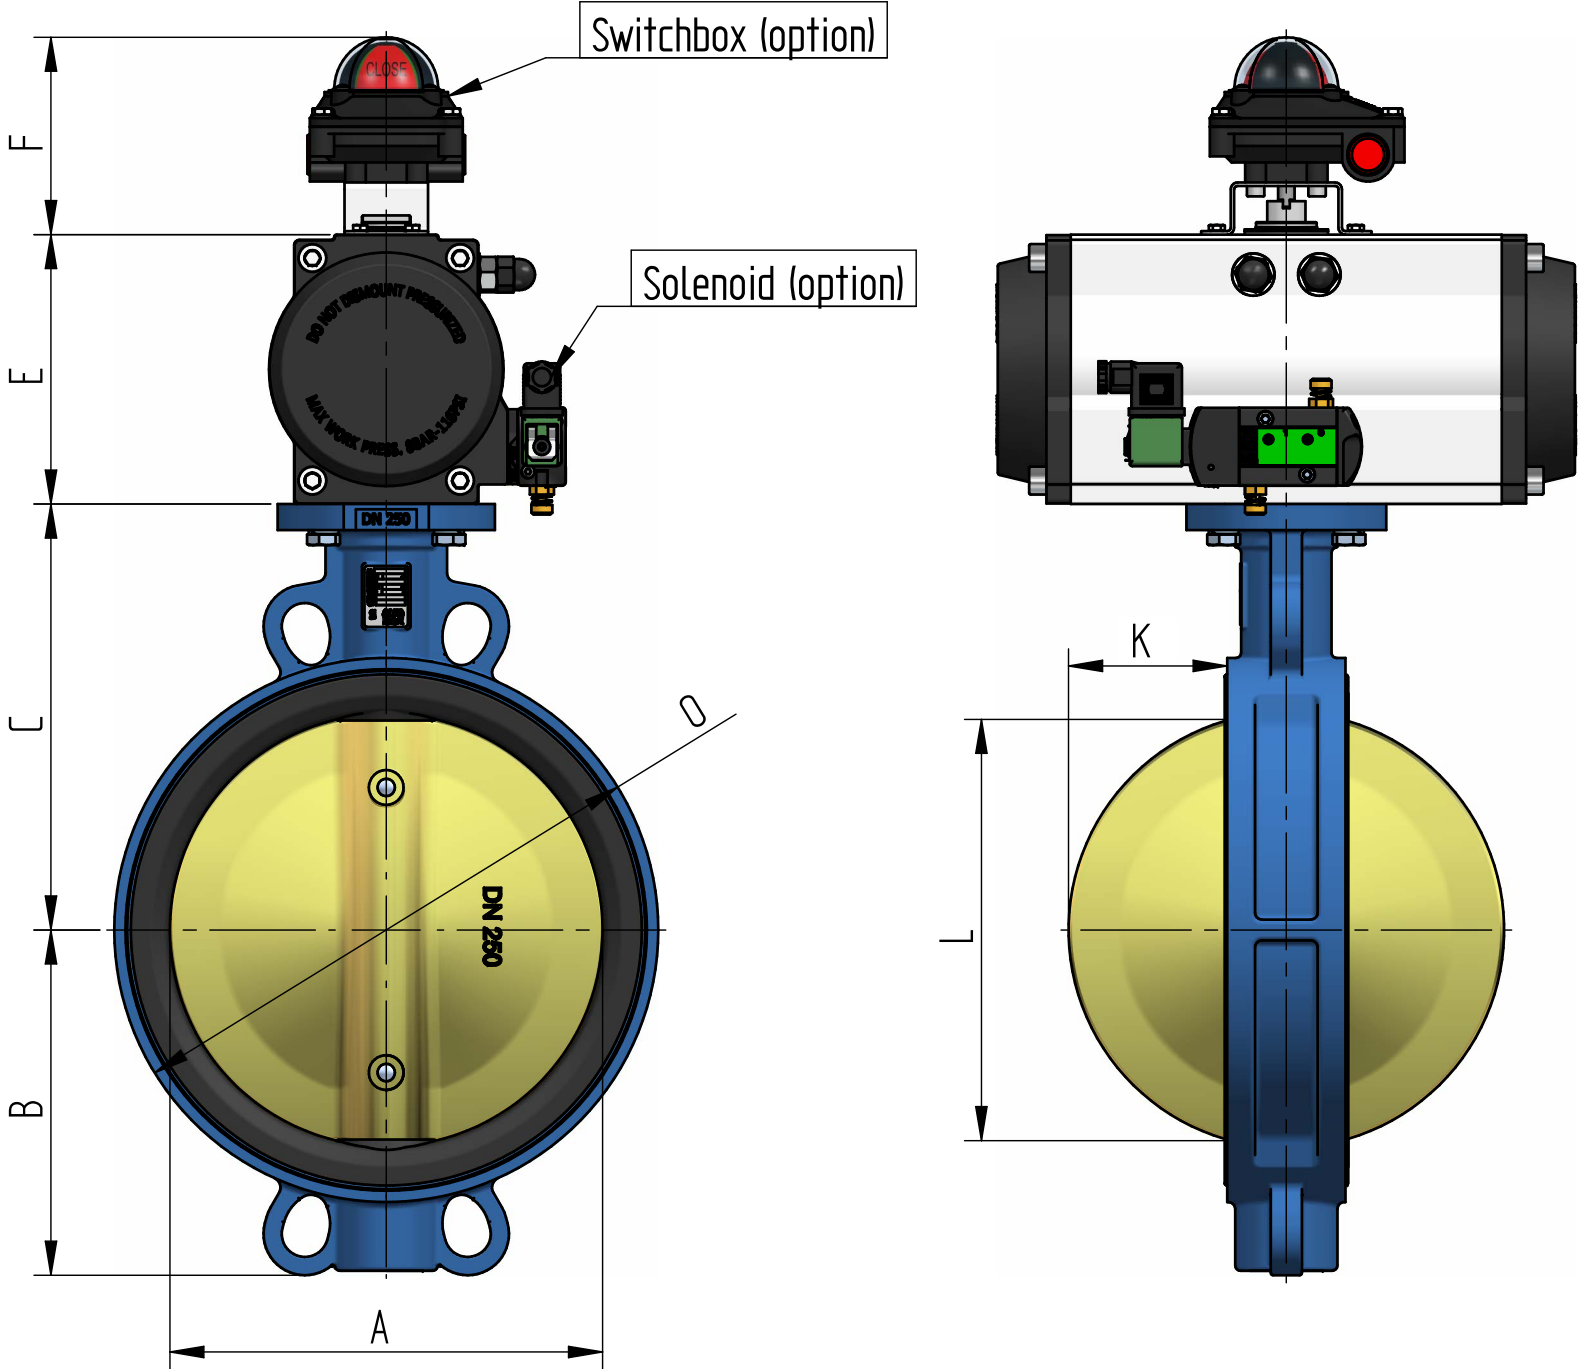



Standard available materials :			
BODY	DISC	SHAFT	SEAT
EN-GJS-400-15	BS 1400 AB2	SS 431	NBR -15°C / +80°C
A216 WCB	Duplex 2205	SS 420	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	Super Duplex 2507	SD F53	Silicone -40°C / +250°C

Size DN 200 to DN 400, Design EN593
Face to face acc. EN558.1 series 20
Flange connections: DIN PN 6-10-16
ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
Pressure rating: up to 10 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute

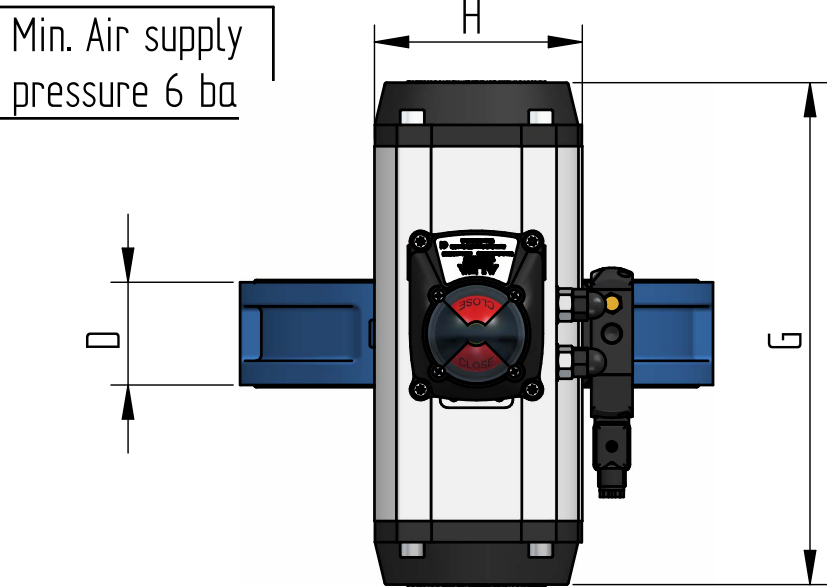

Size	PNEUMATIC	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 200	ALFA - 105 D	201	177	204	60	133	114	275	122	71	193	265	21.8
DN 250	ALFA - 125 D	249	205	245	68	155	114	332	138	91	241	313	31.1
DN 300	ALFA - 140 D	302	239	270	78	172	114	385	153	112	291	371	47.7
DN 350	ALFA - 140 D	340	295	315	78	172	114	385	153	128	324	434	70
DN 400	ALFA - 160 D	397	319	350	102	197	114	450	174	144	376	480	96


WAFER TYPE S57 - PNEUMATIC ACTUATOR (DA) DN450 - DN600 10 Bar

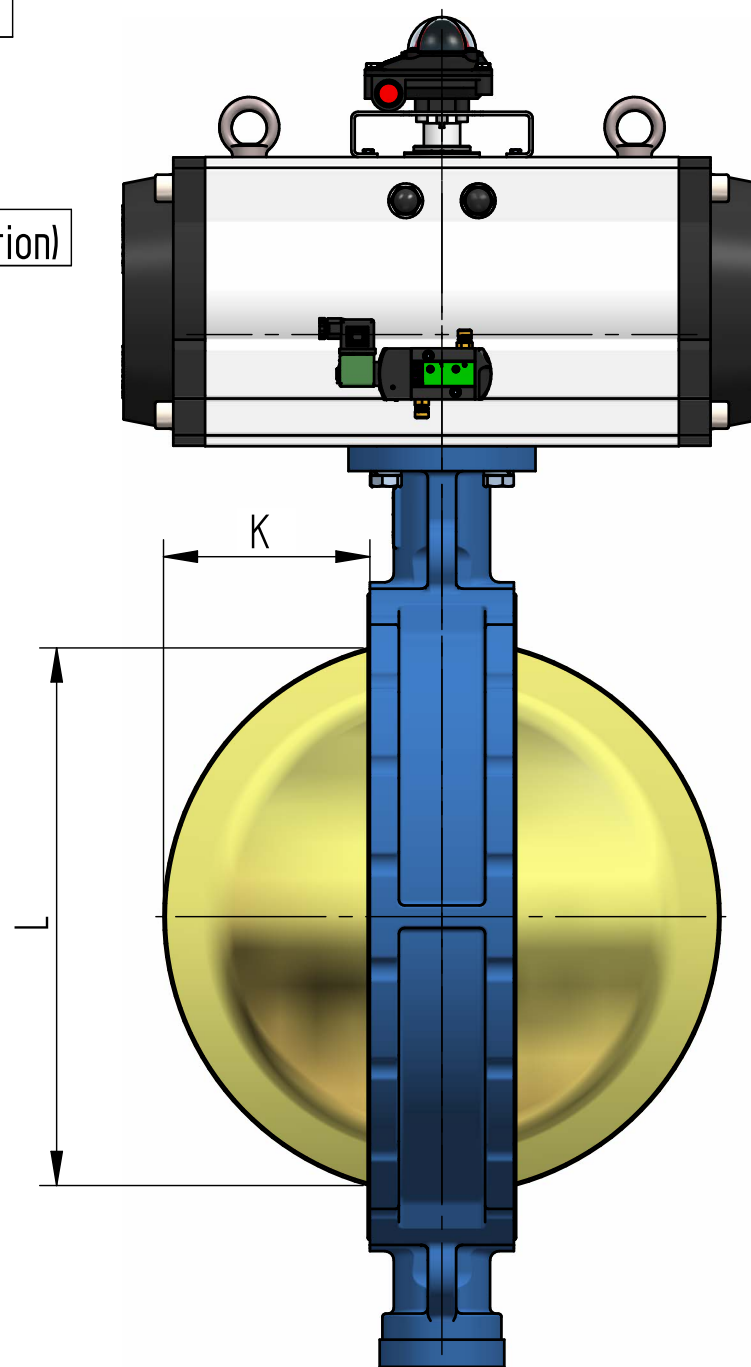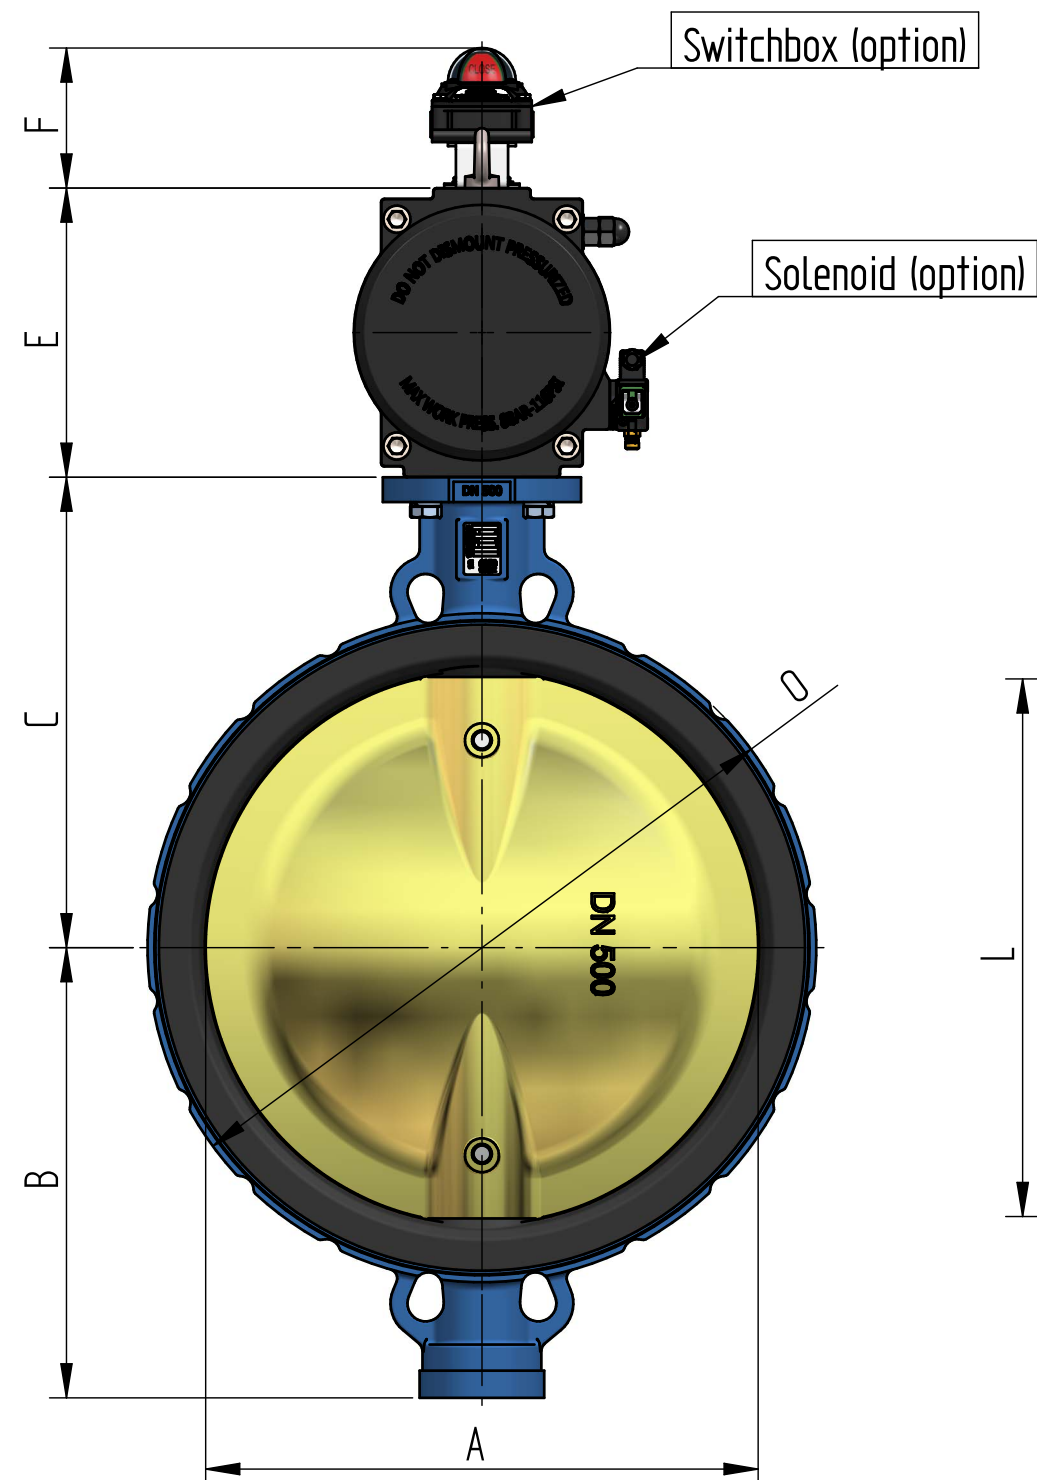

Standard available materials :			
BODY	DISC	SHAFT	SEAT
EN-GJS-400-15	BS 1400 AB2	SS 431	NBR -15°C / +80°C
A216 WCB	Duplex 2205	SS 420	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	Super Duplex 2507	SD F53	Silicone -40°C / +250°C



Size DN 450 to DN 600, Design EN593
Face to face acc. EN558.1 series 20
Flange connections: DIN PN 6-10-16
ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
Pressure rating: up to 10 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute

Min. Air supply
pressure 6 bar.

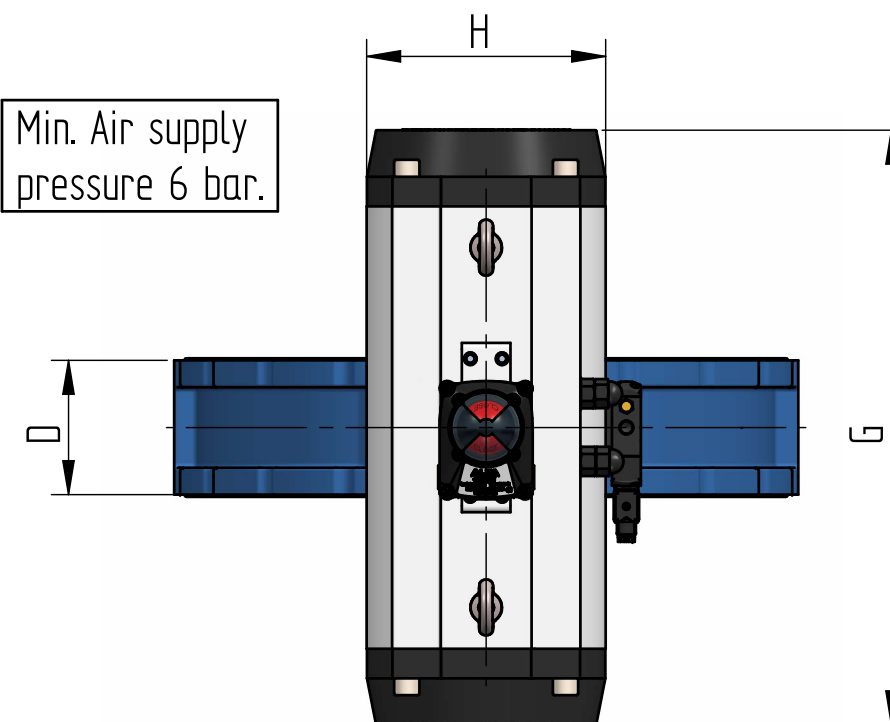


Size	PNEUMATIC	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 450	ALFA - 190 D	438	352	375	114	230	124	507	206	163	426	536	138
DN 500	ALFA - 210 D	489	387	415	127	255	124	562	226	182	475	590	182
DN 600	ALFA - 240 D	590	453	562	154	290	124	646	258	219	572	693	279

WAFER TYPE S57 - PNEUMATIC ACTUATOR (DA) DN700 - DN1000 10 Bar

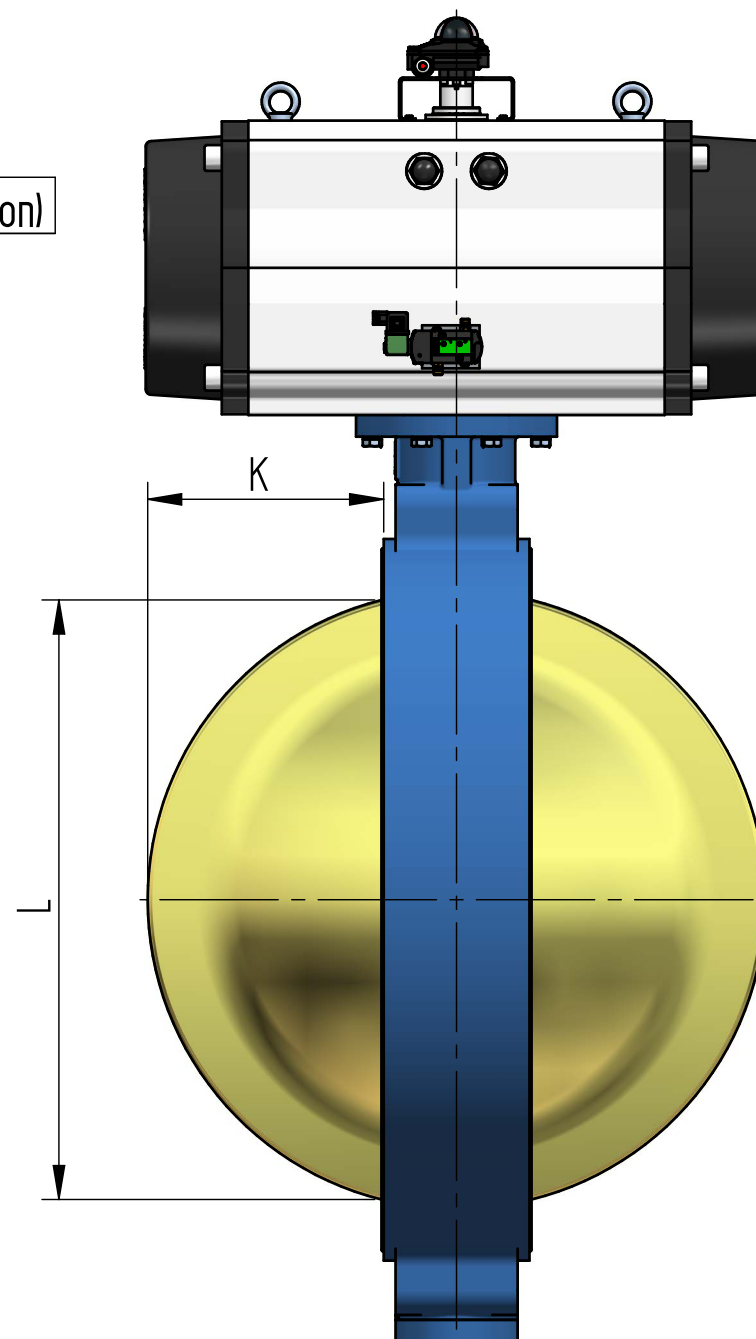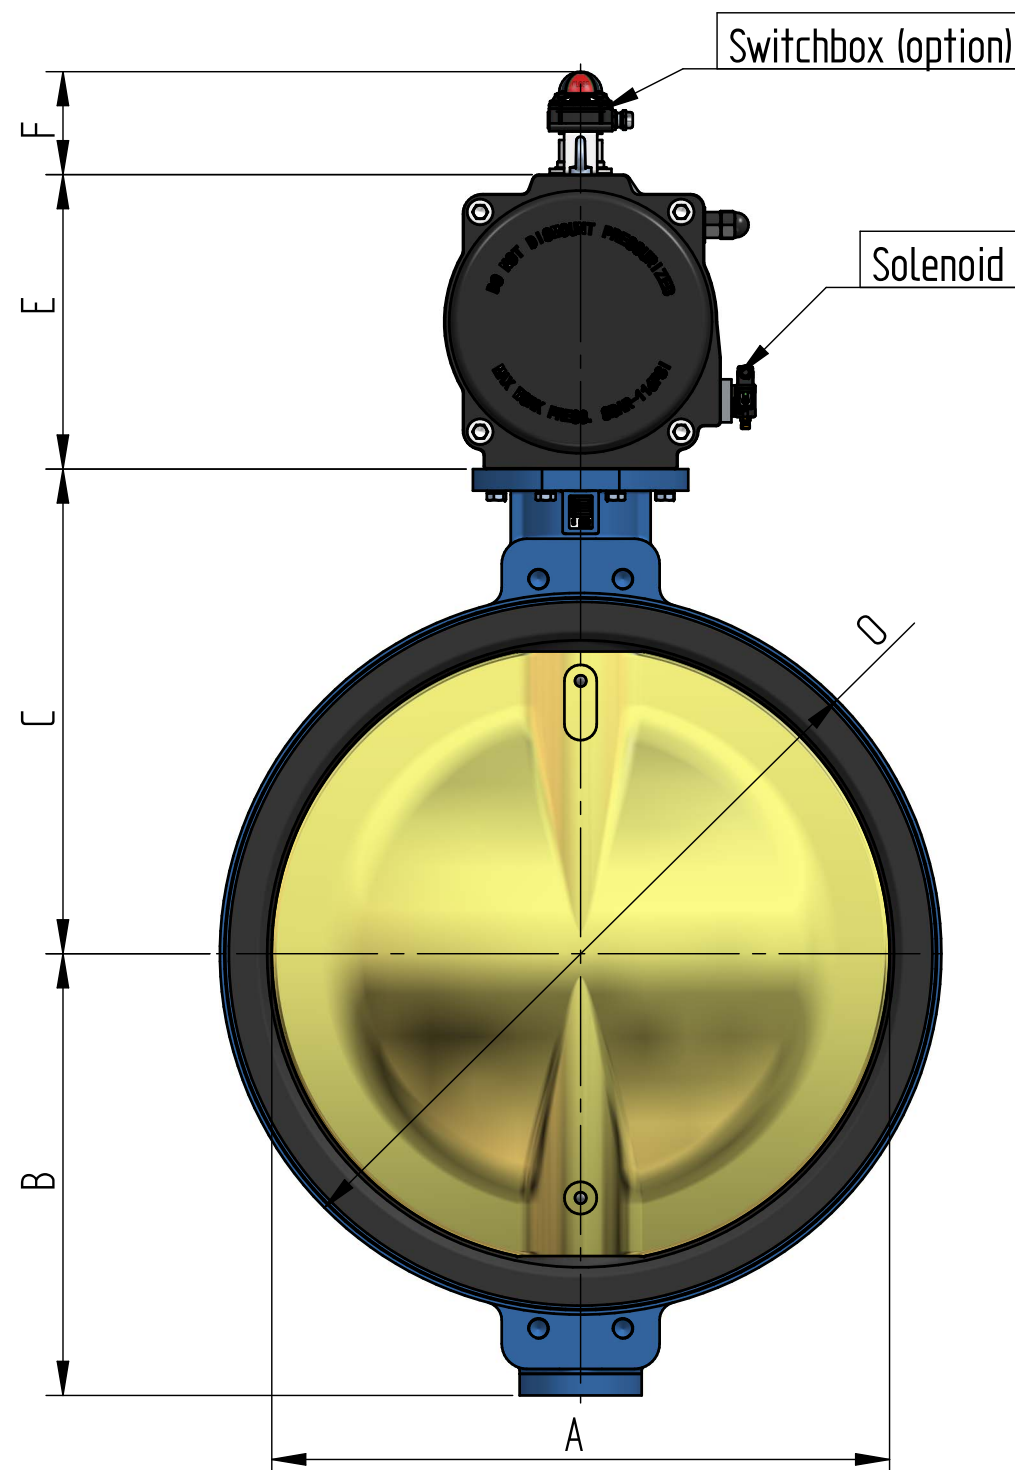

Standard available materials :			
BODY	DISC	SHAFT	SEAT
EN-GJS-400-15	BS 1400 AB2	SS 431	NBR -15°C / +80°C
A216 WCB	Duplex 2205	SS 420	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	Super Duplex 2507	SD F53	Silicone -40°C / +250°C

Size DN 700 to DN 1200, Design EN593
Face to face acc. EN558.1 series 20
Flange connections: DIN PN10-16
ANSI B 16.5 Cl. 150#, JIS B 2211 10K
Pressure rating: up to 10 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute

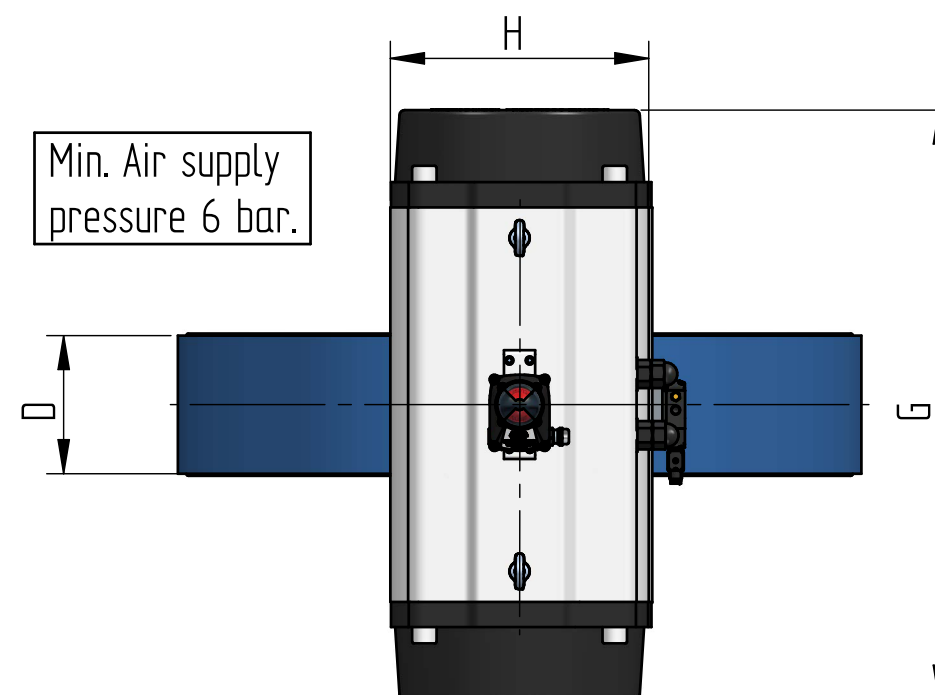

Size	PNEUMATIC	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 700	ALFA - 270 D	692	491	560	165	320	124	722	292	265	676	800	373
DN 800	ALFA - 350 D	792	550	620	190	410	144	866	385	302	772	905	494
DN 900	ALFA - 350 D	861	615	675	203	410	144	866	385	330	840	1005	644
DN 1000	ALFA - 350 D	961	668	735	216	410	144	866	385	374	940	115	894