



WAFER TYPE S57 - ELECTRIC ACTUATOR

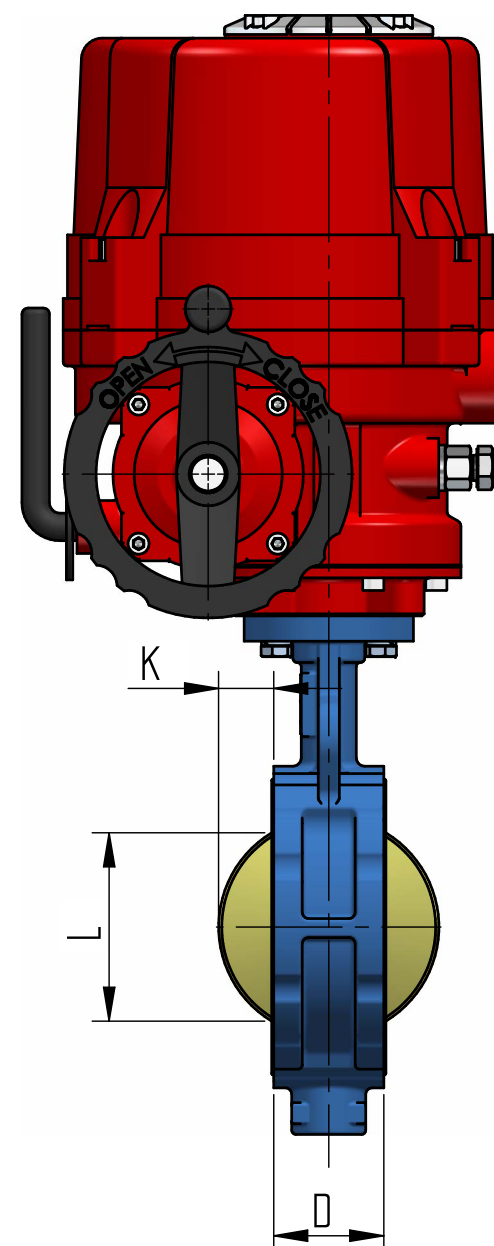


WAFER TYPE S57 - ELECTRIC ACTUATOR DN40 - DN150 10 Bar

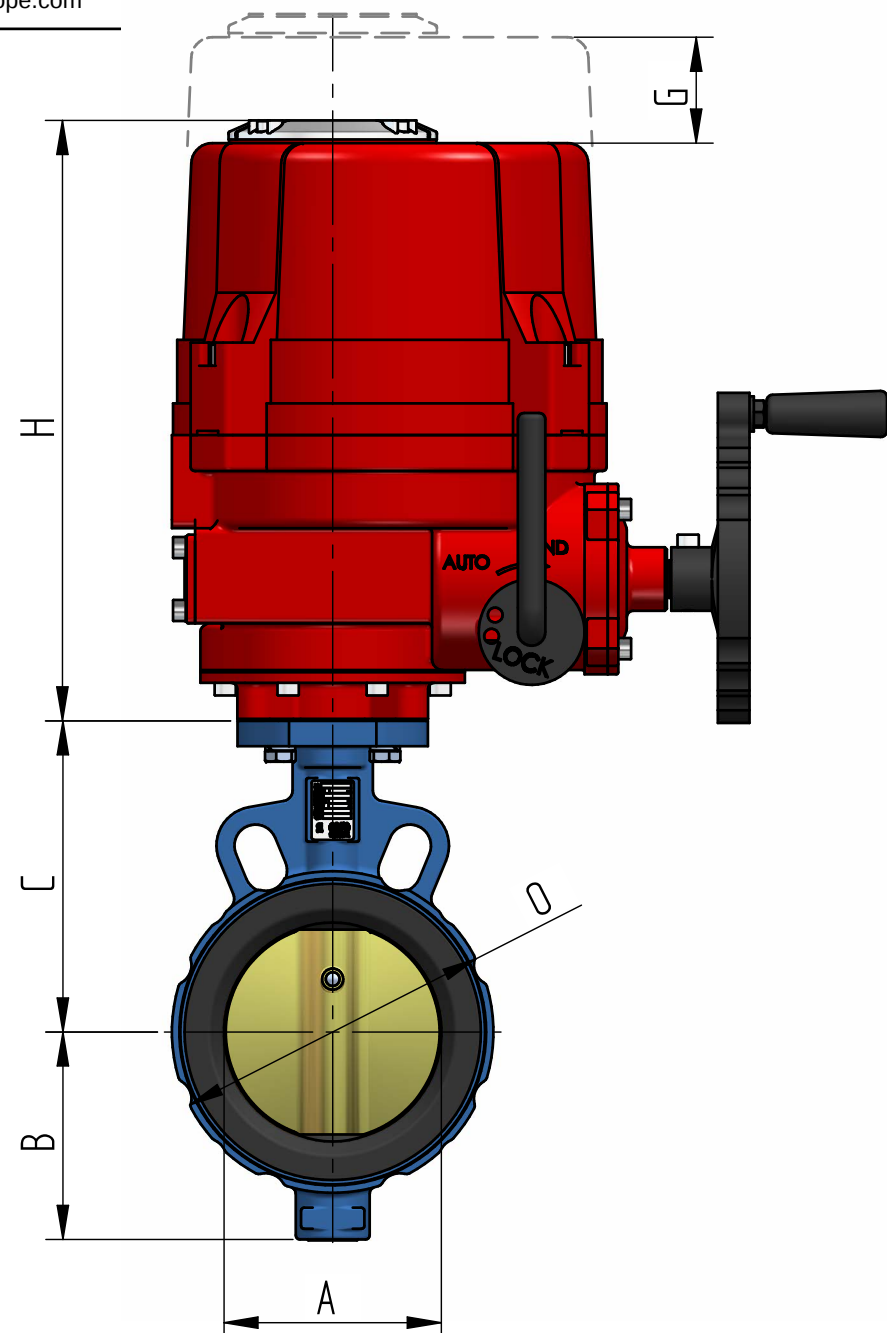




Standard available materials :			
BODY	DISC	SHAFT	SEAT
EN-GJS-400-15	BS 1400 AB2	SS 431	NBR -15°C / +80°C
A216 WCB	Duplex 2205	SS 420	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	Super Duplex 2507	SD F53	Silicone -40°C / +250°C

Size DN 40 to DN 150, Design EN593
Face to face acc. EN558.1 series 20
Flange connections: DIN PN 6-10-16
ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
Pressure rating: up to 10 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute

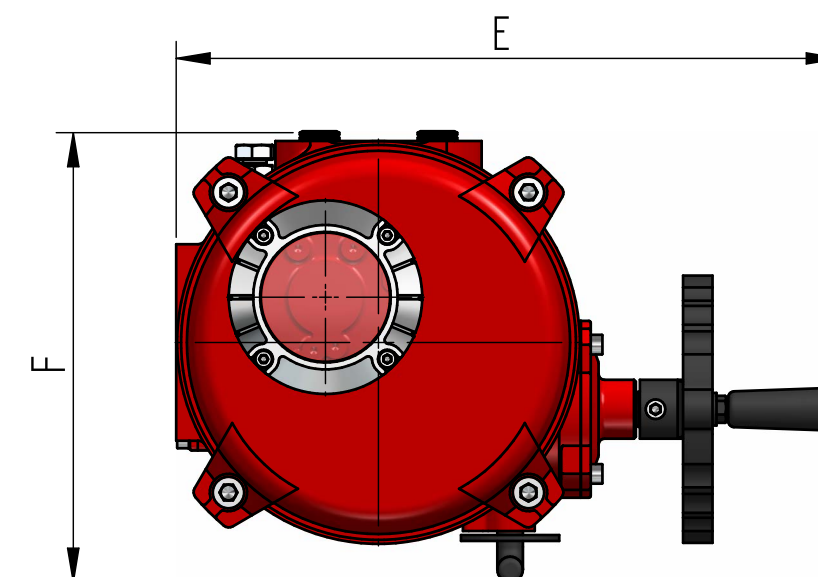

Size	ELECTRIC	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 40	ITQ - 160	41	58	113	33	338	229	140	284	4	24	72	16.5
DN 50	ITQ - 160	52	65	118	43	338	229	140	284	5	27	93	17.8
DN 65	ITQ - 160	63	89	126	46	338	229	140	284	9	43	108	18.8
DN 80	ITQ - 160	78	96	133	46	338	229	140	284	16	62	124	19.0
DN 100	ITQ - 160	103	113	147	52	338	229	140	284	26	90	152	20.4
DN 125	ITQ - 160	125	130	160	56	338	229	140	284	34	110	177	22.5
DN 150	ITQ - 160	155	146	180	56	338	229	140	284	50	145	210	24.5

WAFER TYPE S57 - ELECTRIC ACTUATOR DN200 - DN600 10 Bar

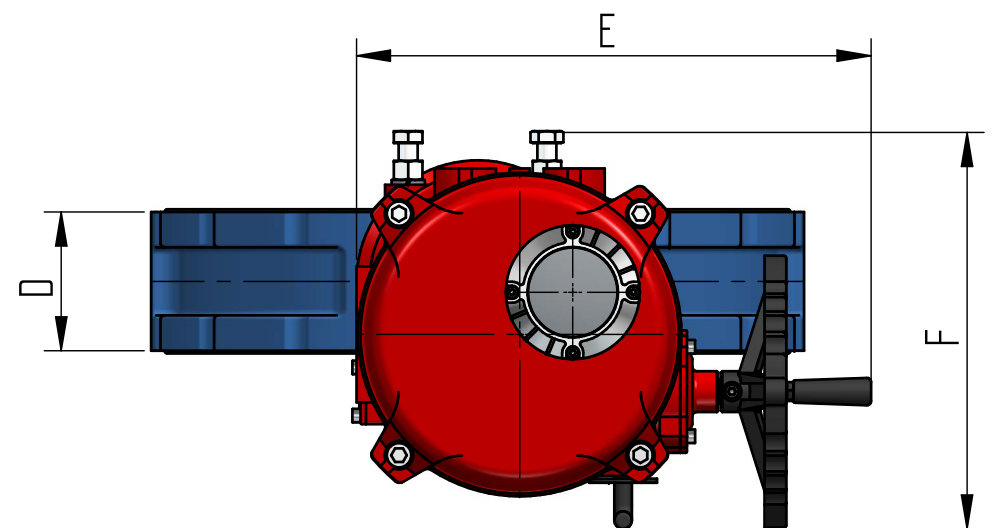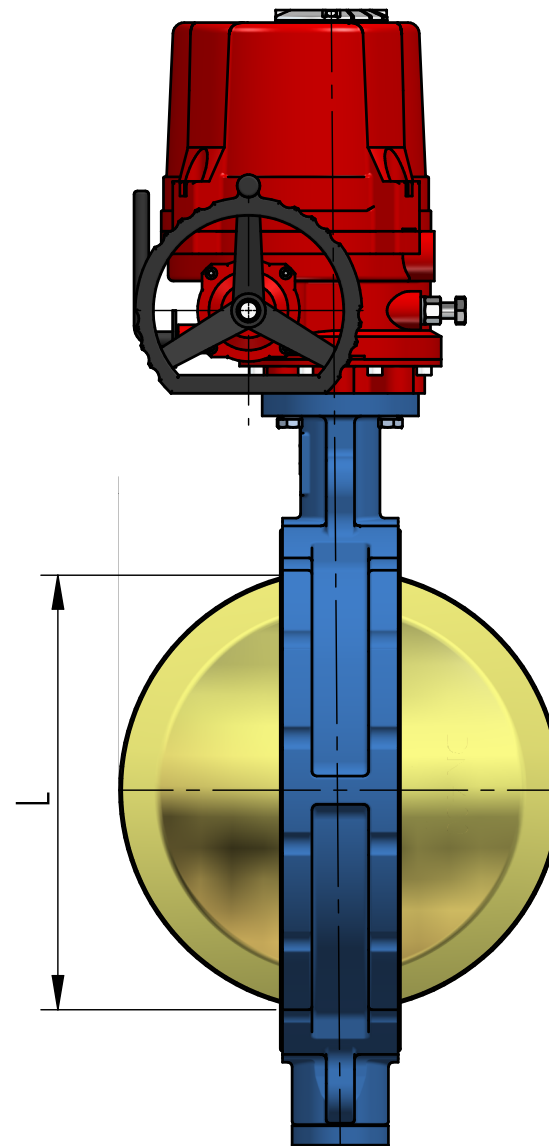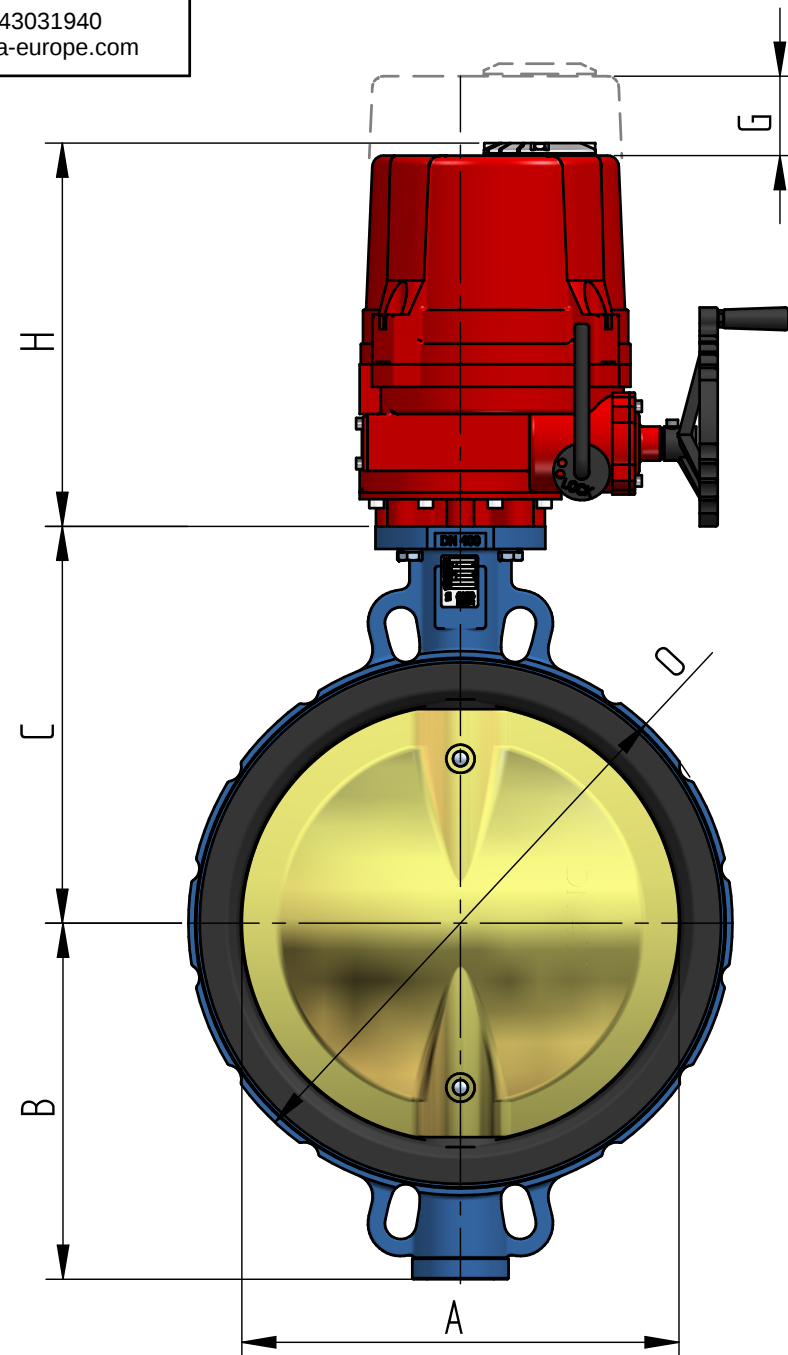

Standard available materials :

BODY	DISC	SHAFT	SEAT
EN-GJS-400-15	BS 1400 AB2	SS 431	NBR -15°C / +80°C
A216 WCB	Duplex 2205	SS 420	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	Super Duplex 2507	SD F53	Silicone -40°C / +250°C

Size DN 200 to DN 600, Design EN593
 Face to face acc. EN558.1 series 20
 Flange connections: DIN PN 6-10-16
 ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
 Pressure rating: up to 10 bar
 Top flange according ISO 5211
 Vacuum to 1*10⁻³ 0.2 Torr absolute

Size	PNEUMATIC	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 200	ITQ - 240	201	177	204	60	338	229	140	284	71	193	265	29.0
DN 250	ITQ - 500	249	205	245	68	357	244	170	313	91	241	313	41.2
DN 300	ITQ - 500	302	239	270	78	357	244	170	313	112	291	371	53.4
DN 350	ITQ - 500	340	295	315	78	357	244	170	313	128	324	434	76.2
DN 400	ITQ - 800	397	319	350	102	380	287	195	338	144	376	480	100.0
DN 450	ITQ - 1100	438	352	375	114	380	287	195	338	163	426	536	131.0
DN 500	ITQ - 2000	489	387	415	127	440	375	225	385	182	475	590	180.0
DN 600	ITQ - 2000	590	453	562	154	440	375	225	385	219	572	693	253.0