


WAFER TYPE S57 MO - PNEUMATIC ACTUATOR (SR)




WAFER TYPE S57 - MO - PNEUMATIC ACTUATOR (SR) DN40 - DN300

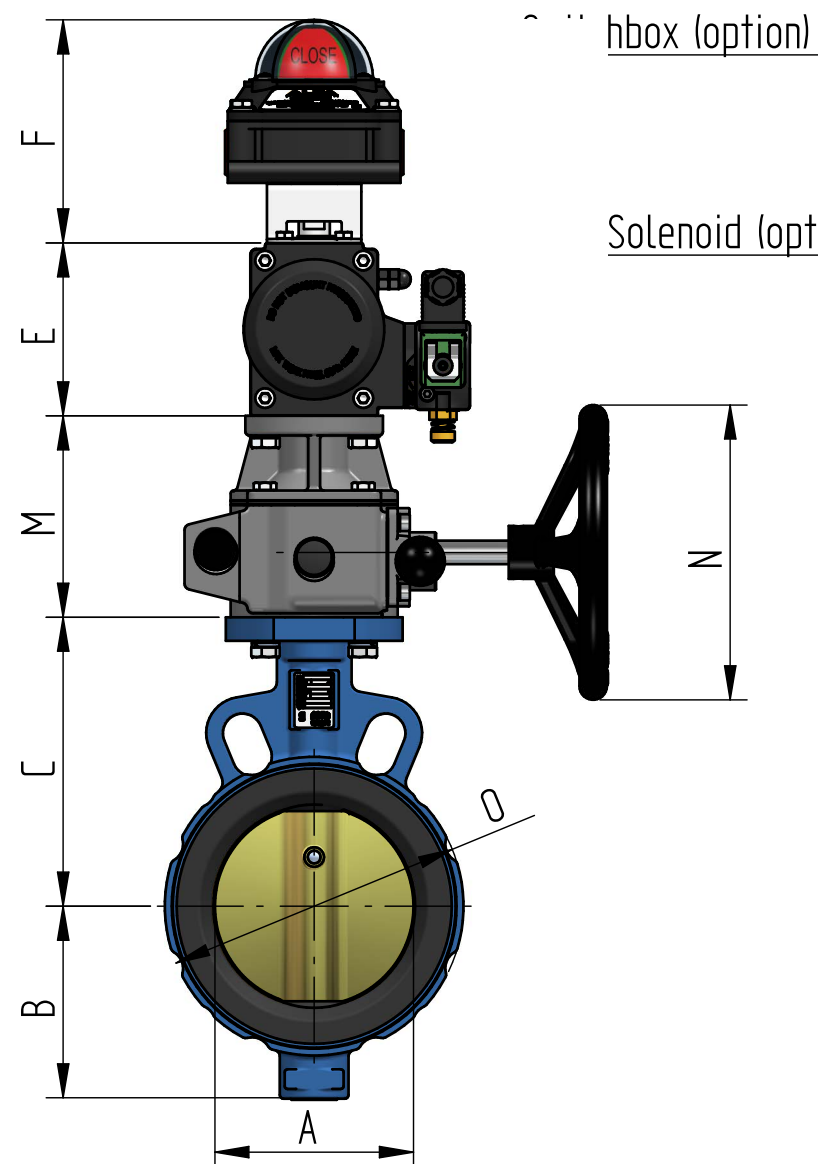

hbox (option)


Solenoid (option)

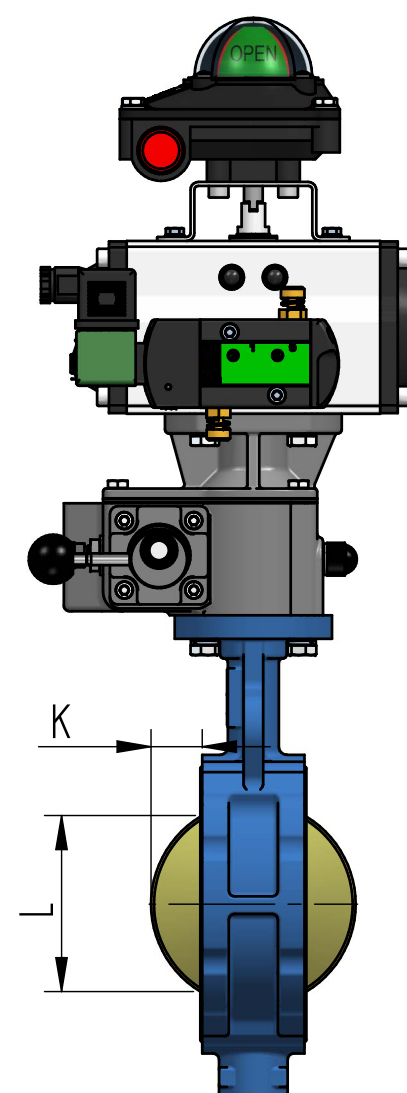

Standard available materials :			
BODY	DISC	SHAFT	SEAT
EN-GJS-400-15	BS 1400 AB2	SS 431	NBR -15°C / +80°C
A216 WCB	Duplex 2205	SS 420	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	Super Duplex 2507	SD F53	Silicone -40°C / +250°C



Size DN 40 to DN 300, Design EN593
Face to face acc. EN558.1 series 20
Flange connections: DIN PN 6-10-16
ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
Pressure rating: up to 10 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute

Min. Air supply
pressure 6 bar.

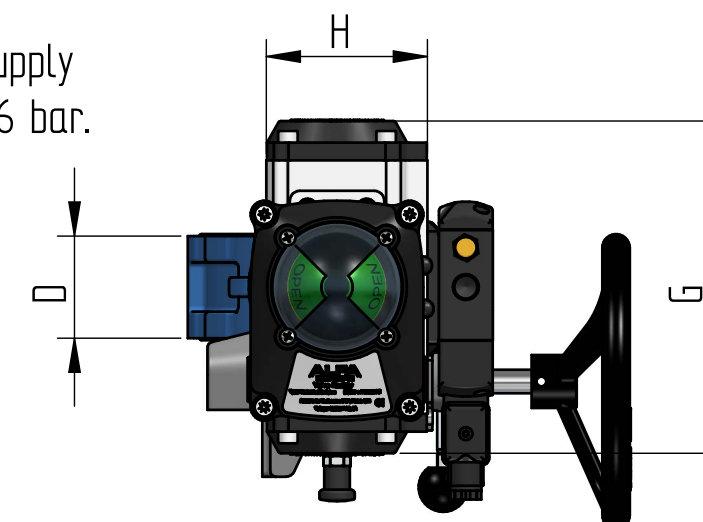

Size	MO-Gearbox	PNEUMATIC	A	B	C	D	E	F	G	H	K	L	M	N	O	Weight ± Kg
DN 40	MO-15	ALFA - 063 SR	41	58	113	33	88	114	169	82	4	24	102	SC-150	72	9.3
DN 50	MO-15	ALFA - 063 SR	52	65	118	43	88	114	169	82	5	27	102	SC-150	93	10.7
DN 65	MO-15	ALFA - 063 SR	63	74	126	46	88	114	169	82	9	43	102	SC-150	108	11.7
DN 80	MO-15	ALFA - 075 SR	78	85	133	46	100	114	201	82	16	62	102	SC-150	124	12.7
DN 100	MO-15	ALFA - 083 SR	103	98	147	52	108	114	209	82	26	90	102	SC-150	152	14.8
DN 125	MO-15	ALFA - 092 SR	125	113	160	56	120	114	242	108	34	110	102	SC-150	177	18.5
DN 150	MO-15	ALFA - 105 SR	155	133	180	56	133	114	275	122	50	145	102	SC-150	210	22.2
DN 200	MO-35	ALFA - 140 SR	201	163	204	60	232	114	385	153	71	193	125	SW-200	265	39.6
DN 250	MO-35	ALFA - 140 SR	249	196	245	68	172	114	385	153	91	241	125	SW-200	313	45.8
DN 300	MO-75	ALFA - 160 SR	302	232	270	78	197	114	450	174	112	291	134	SW-250	371	72.0


WAFER TYPE S57 - MO - PNEUMATIC ACTUATOR (SR) DN350 - DN600

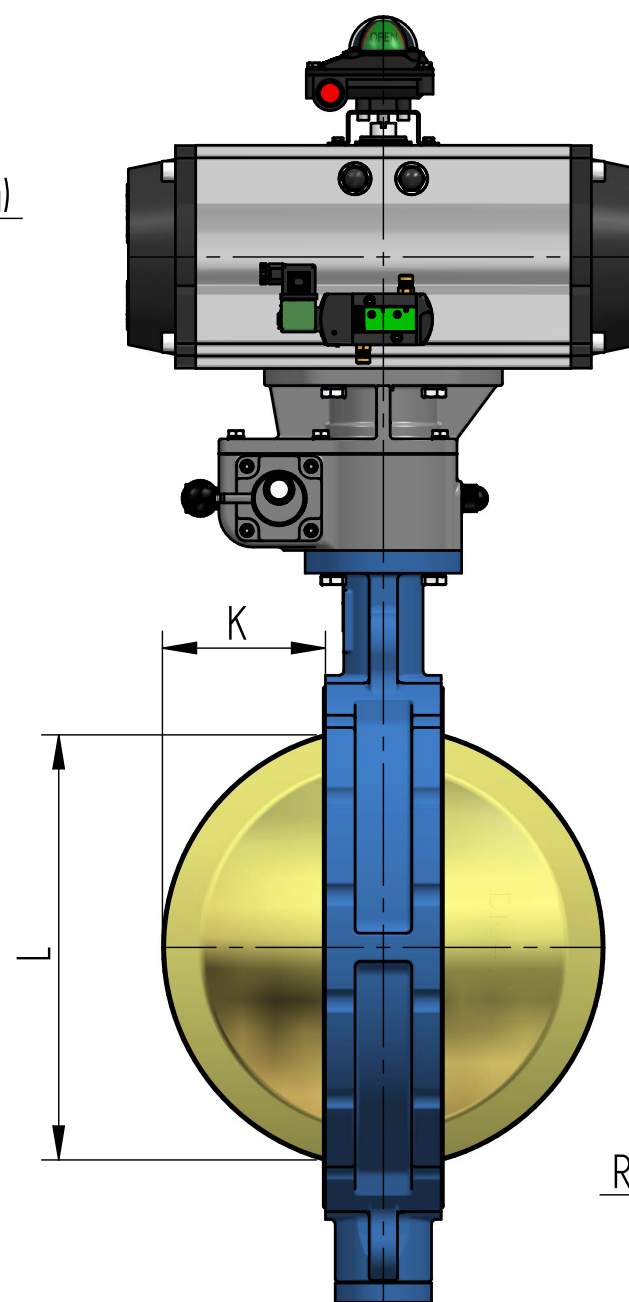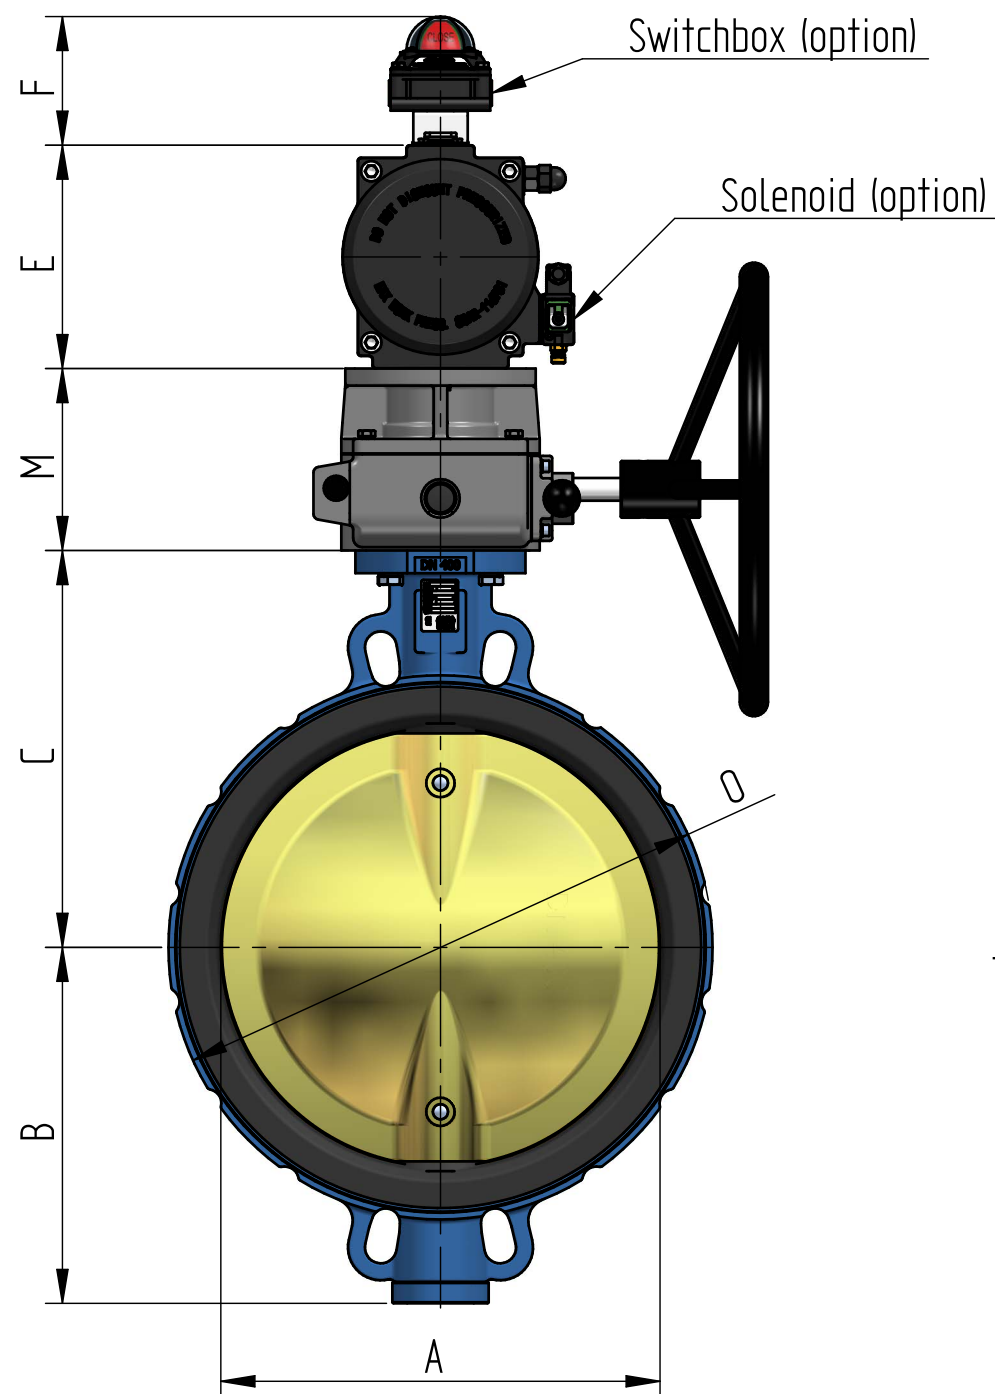

Standard available materials :			
BODY	DISC	SHAFT	SEAT
EN-GJS-400-15	BS 1400 AB2	SS 431	NBR -15°C / +80°C
A216 WCB	Duplex 2205	SS 420	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	Super Duplex 2507	SD F53	Silicone -40°C / +250°C

Size DN 350 to DN 600, Design EN593
Face to face acc. EN558.1 series 20
Flange connections: DIN PN 6-10-16
ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
Pressure rating: up to 10 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute

Min. Air supply
pressure 6 bar.

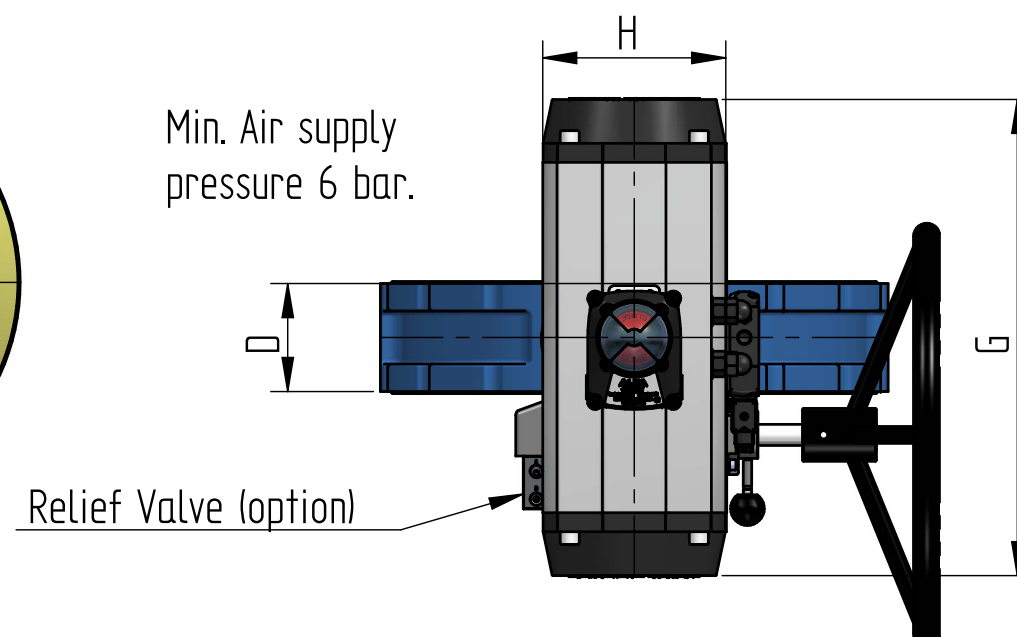

Size	MO-Gearbox	PNEUMATIC	A	B	C	D	E	F	G	H	K	L	M	N	O	Weight ± Kg
DN 350	MO-75	ALFA - 190 SR	340	295	315	78	230	124	507	206	128	324	131	SW-250	434	110
DN 400	MO-200	ALFA - 210 SR	397	314	350	102	255	124	562	226	144	376	160	SW-400	480	156
DN 450	MO-200	ALFA - 240 SR	438	358	375	114	290	124	646	258	163	426	160	SW-400	536	215
DN 500	MO-200	ALFA - 240 SR	489	397	415	127	290	124	646	258	182	475	160	SW-400	590	246
DN 600	MO-350	ALFA - 300 SR	590	453	515	154	354	124	748	330	219	572	184	SW-500	693	394