


DOUBLE FLANGED TYPE S46 ELECTRIC ACTUATOR



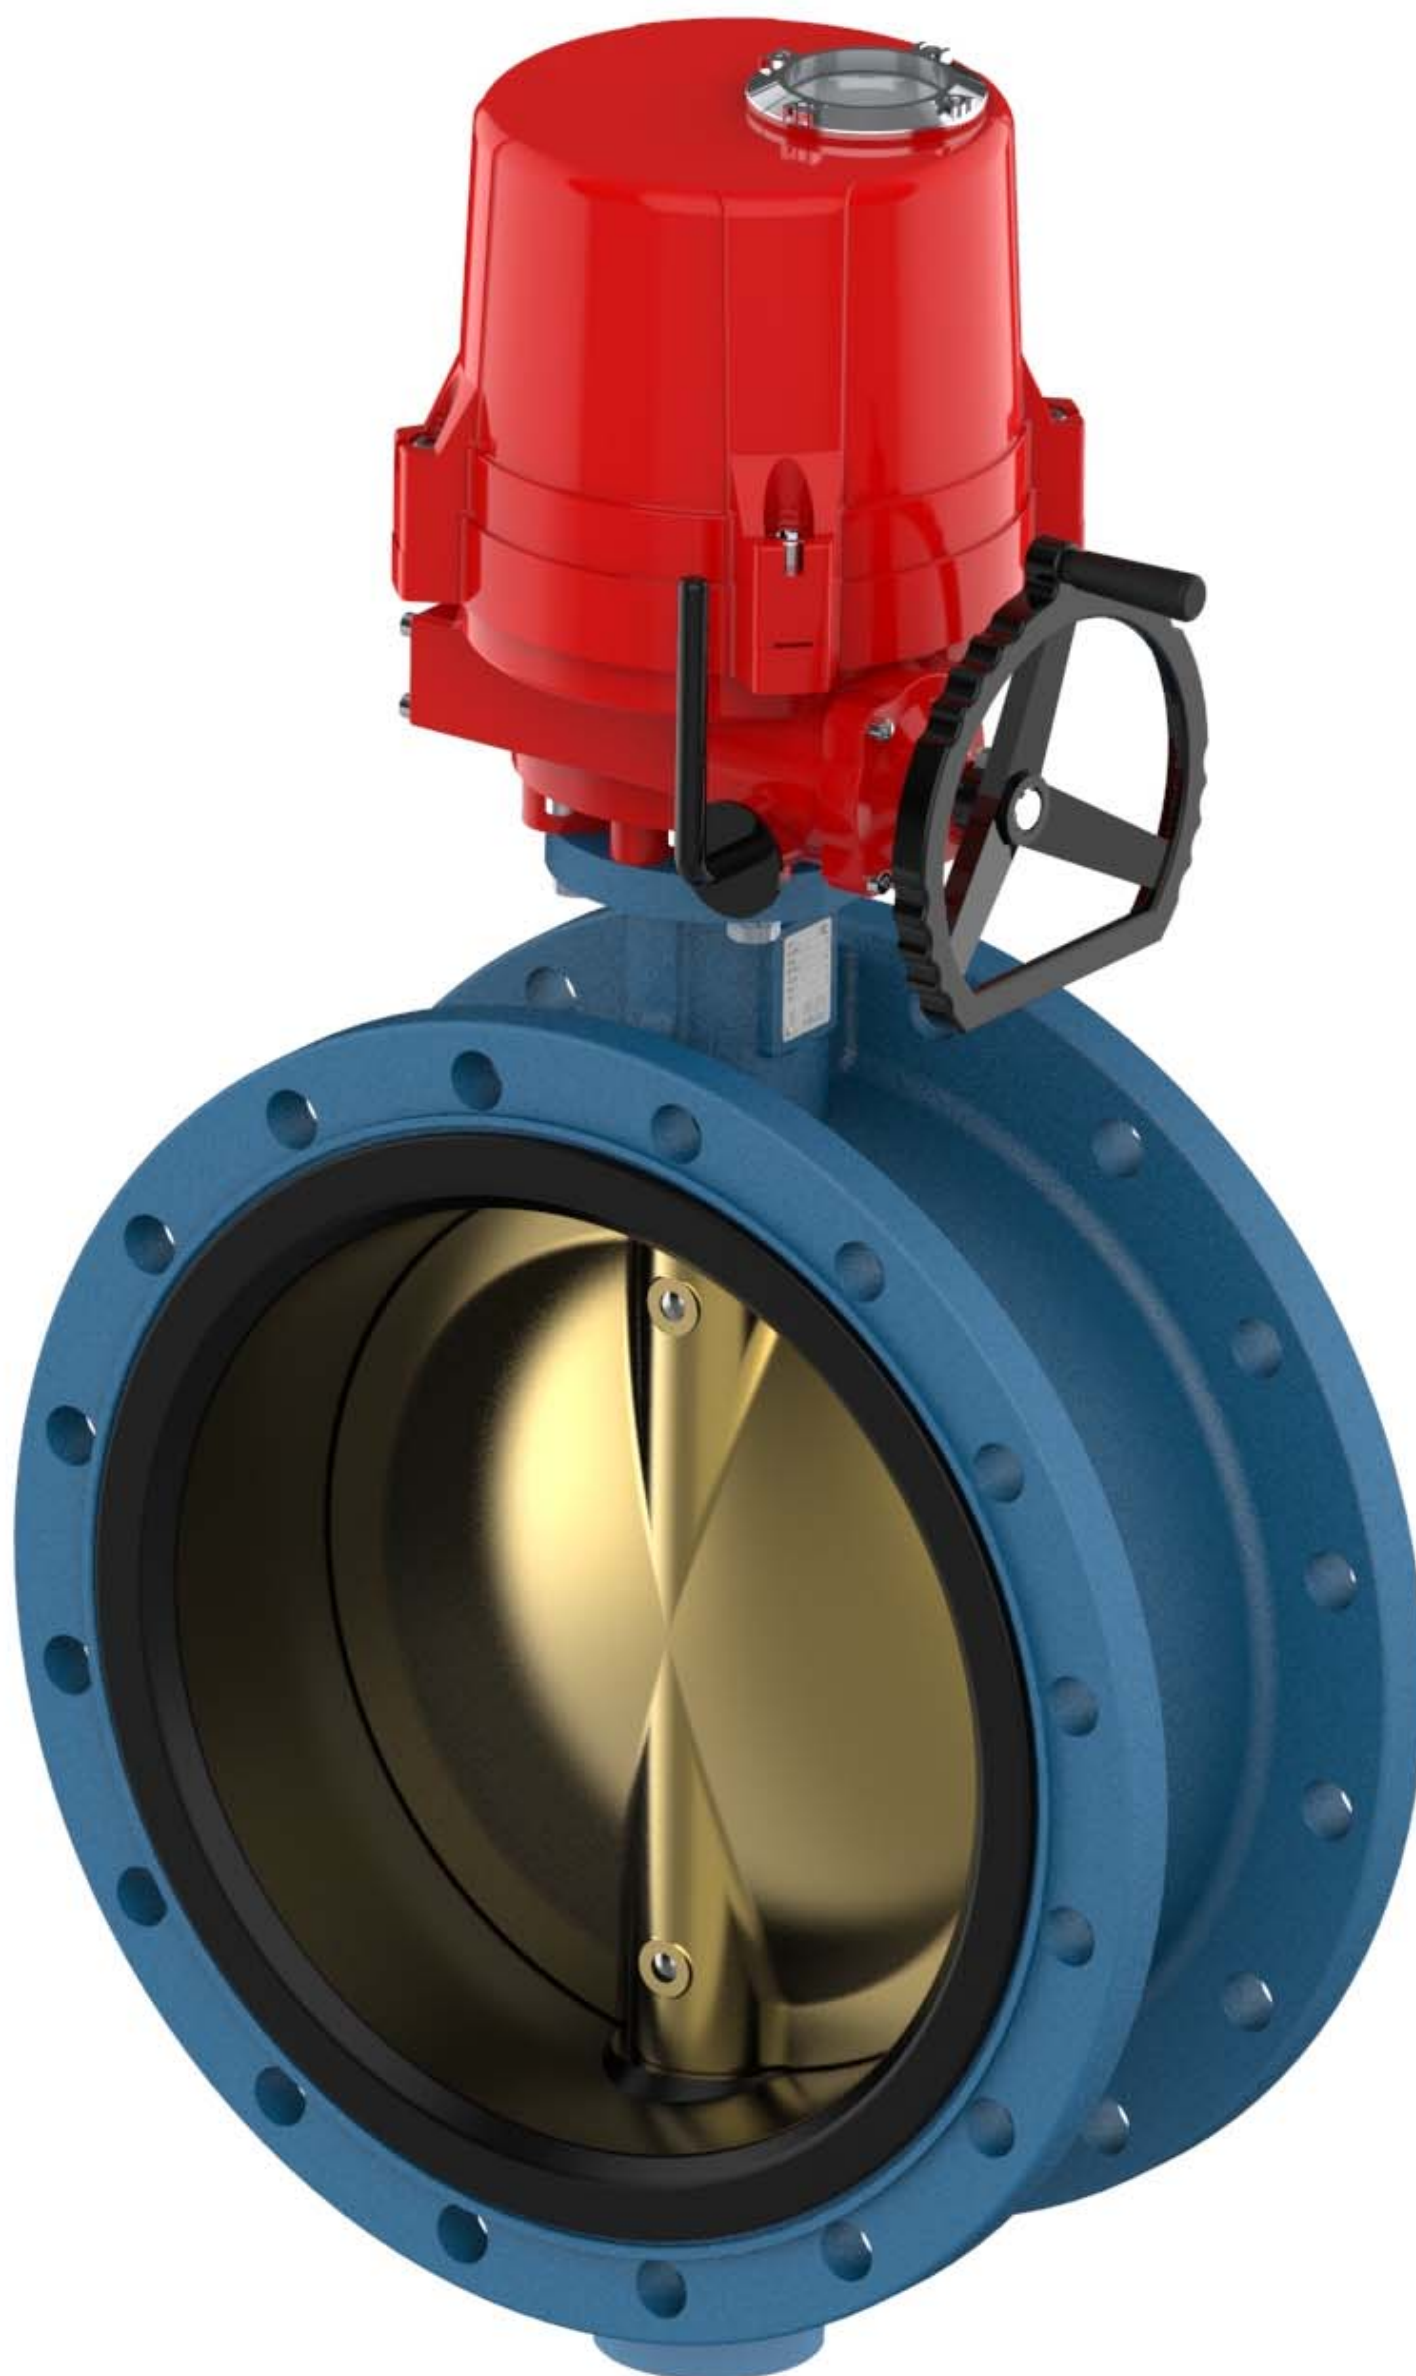


DOUBLE FLANGED TYPE S46 - ELECTRIC ACTUATOR DN40 - DN200

Size DN 40 to DN 200, Design EN593
Face to face acc. EN558.1 series 13
Flange connections: DIN PN6-10-16-25
ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
Temperature -40/+250°C
Various pressure ratings up to 25 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute



Standard available materials :

BODY	DISC	SHAFT	SEAT
EN-JS1030	BS 1400 AB2	SS 1.4122	NBR -15°C / +80°C
A216 WCB	EN-JS1030	SS 431	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	SD 2507	SD F53	Silicone -40°C / +250°C

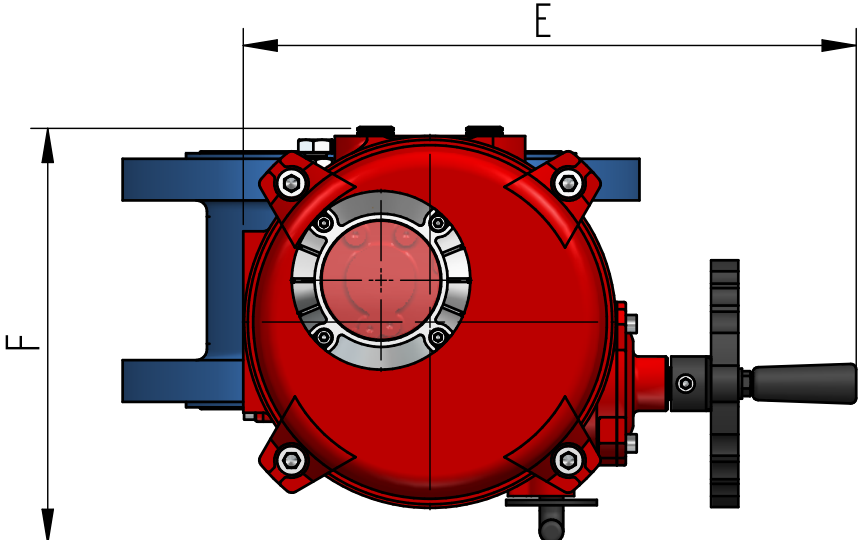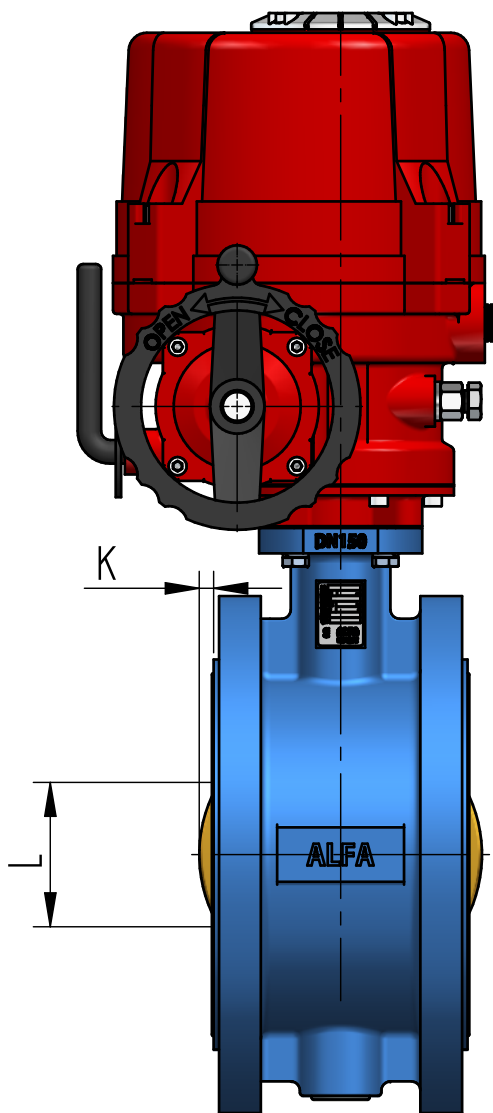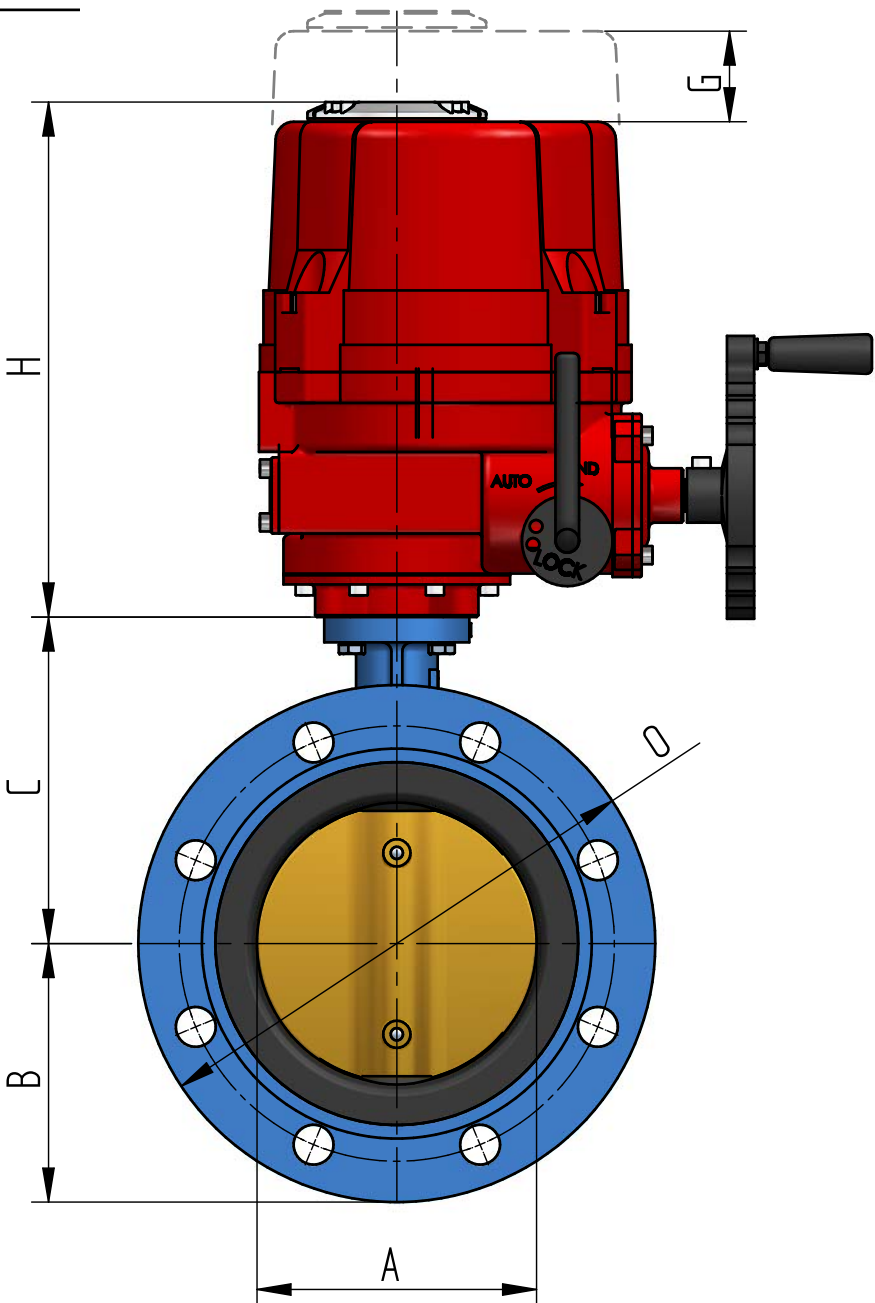

Size	ELECTRIC	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 40	ITQ - 160	41	75.0	113	106	338	229	140	284	--	--	150	20.5
DN 50	ITQ - 160	52	82.5	118	108	338	229	140	284	--	--	165	22.5
DN 65	ITQ - 160	63	92.5	126	112	338	229	140	284	--	--	185	24.0
DN 80	ITQ - 160	78	100.0	133	114	338	229	140	284	--	--	200	25.7
DN 100	ITQ - 160	103	110.0	147	127	338	229	140	284	--	--	220	28.6
DN 125	ITQ - 160	125	125.0	160	140	338	229	140	284	--	--	250	34.3
DN 150	ITQ - 160	155	142.5	180	140	338	229	140	284	8	69	285	37.7
DN 200	ITQ - 240	201	170	204	152	338	229	140	284	25	134	340	47.4


DOUBLE FLANGED TYPE S46 - ELECTRIC ACTUATOR DN250 - DN600

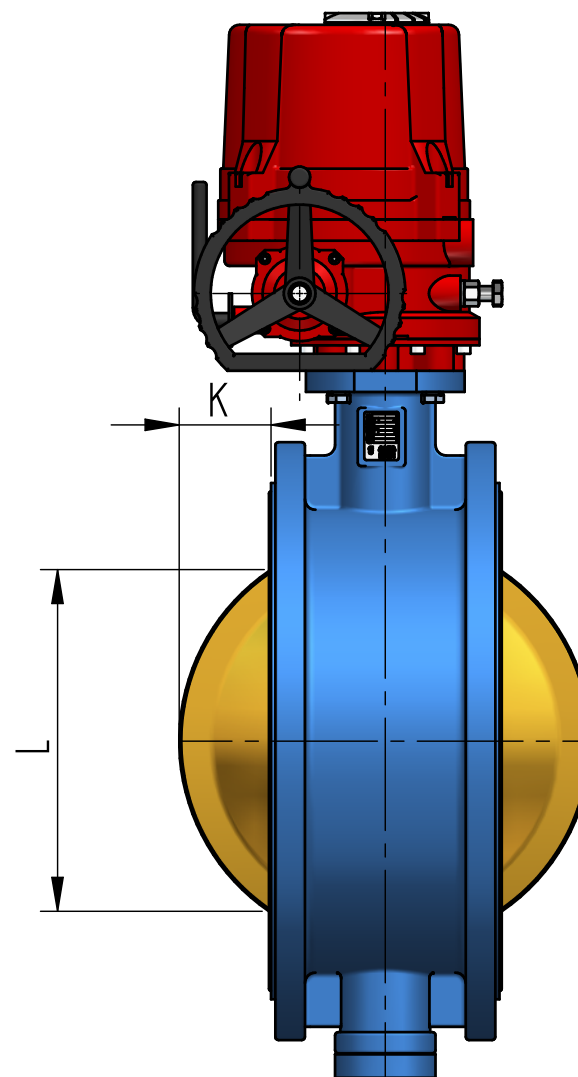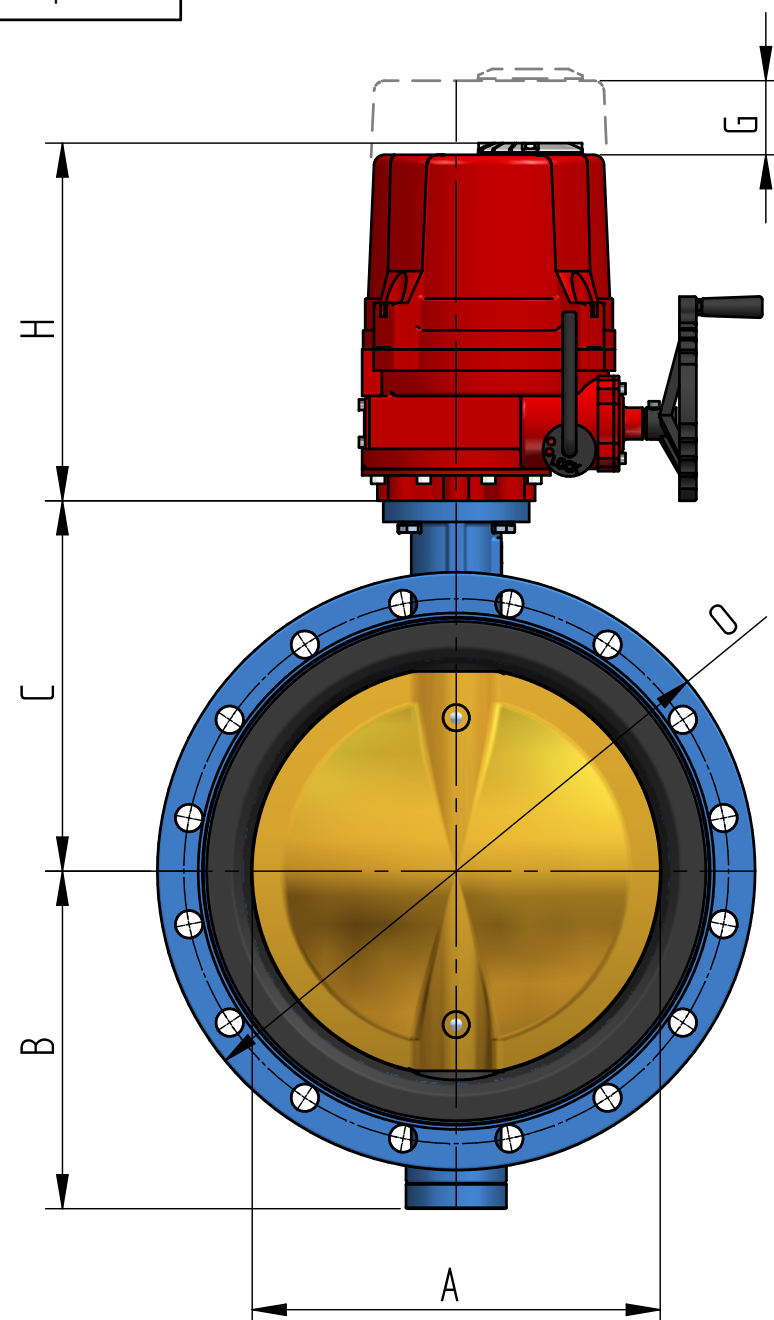

Size DN 250 to DN 600, Design EN593
Face to face acc. EN558.1 series 13
Flange connections: DIN PN6-10-16-25
ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
Temperature -40/+250°C
Various pressure ratings up to 25 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute

Standard available materials :

BODY	DISC	SHAFT	SEAT
EN-JS1030	BS 1400 AB2	SS 14122	NBR -15°C / +80°C
A216 WCB	EN-JS1030	SS 431	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 14462	Viton -0°C / +200°C
BS 1400 AB2	SD 2507	SD F53	Silicone -40°C / +250°C

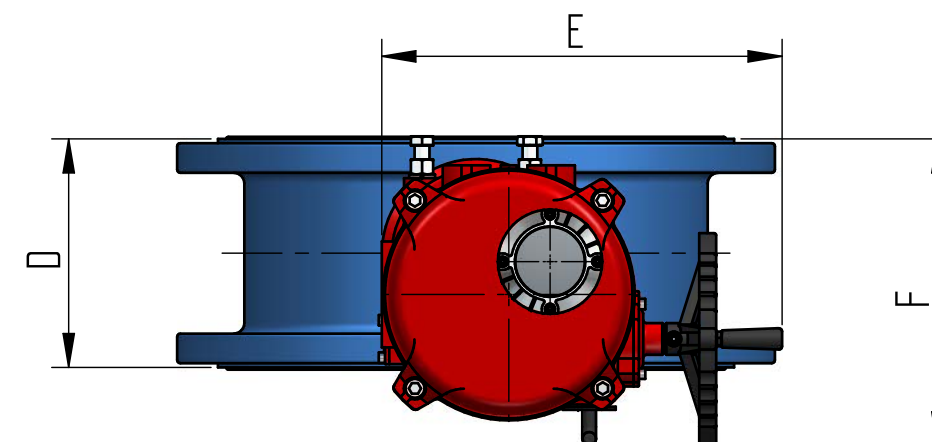

Size	PNEUMATIC	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 250	ITQ - 500	249	197.5	245	165	357	244	170	313	43	189	395	69.4
DN 300	ITQ - 500	302	222.5	270	178	357	244	170	313	62	244	445	78.6
DN 350	ITQ - 500	340	252.5	315	190	357	244	170	313	72	275	505	109.2
DN 400	ITQ - 800	397	282.5	350	216	380	287	195	338	87	325	565	134.3
DN 450	ITQ - 1100	438	353.0	375	222	380	287	195	338	109	381	615	160.0
DN 500	ITQ - 2000	489	387.0	415	229	440	375	225	385	131	435	670	214.0
DN 600	ITQ - 2000	590	453.0	562	267	440	375	225	385	163	529	780	298