

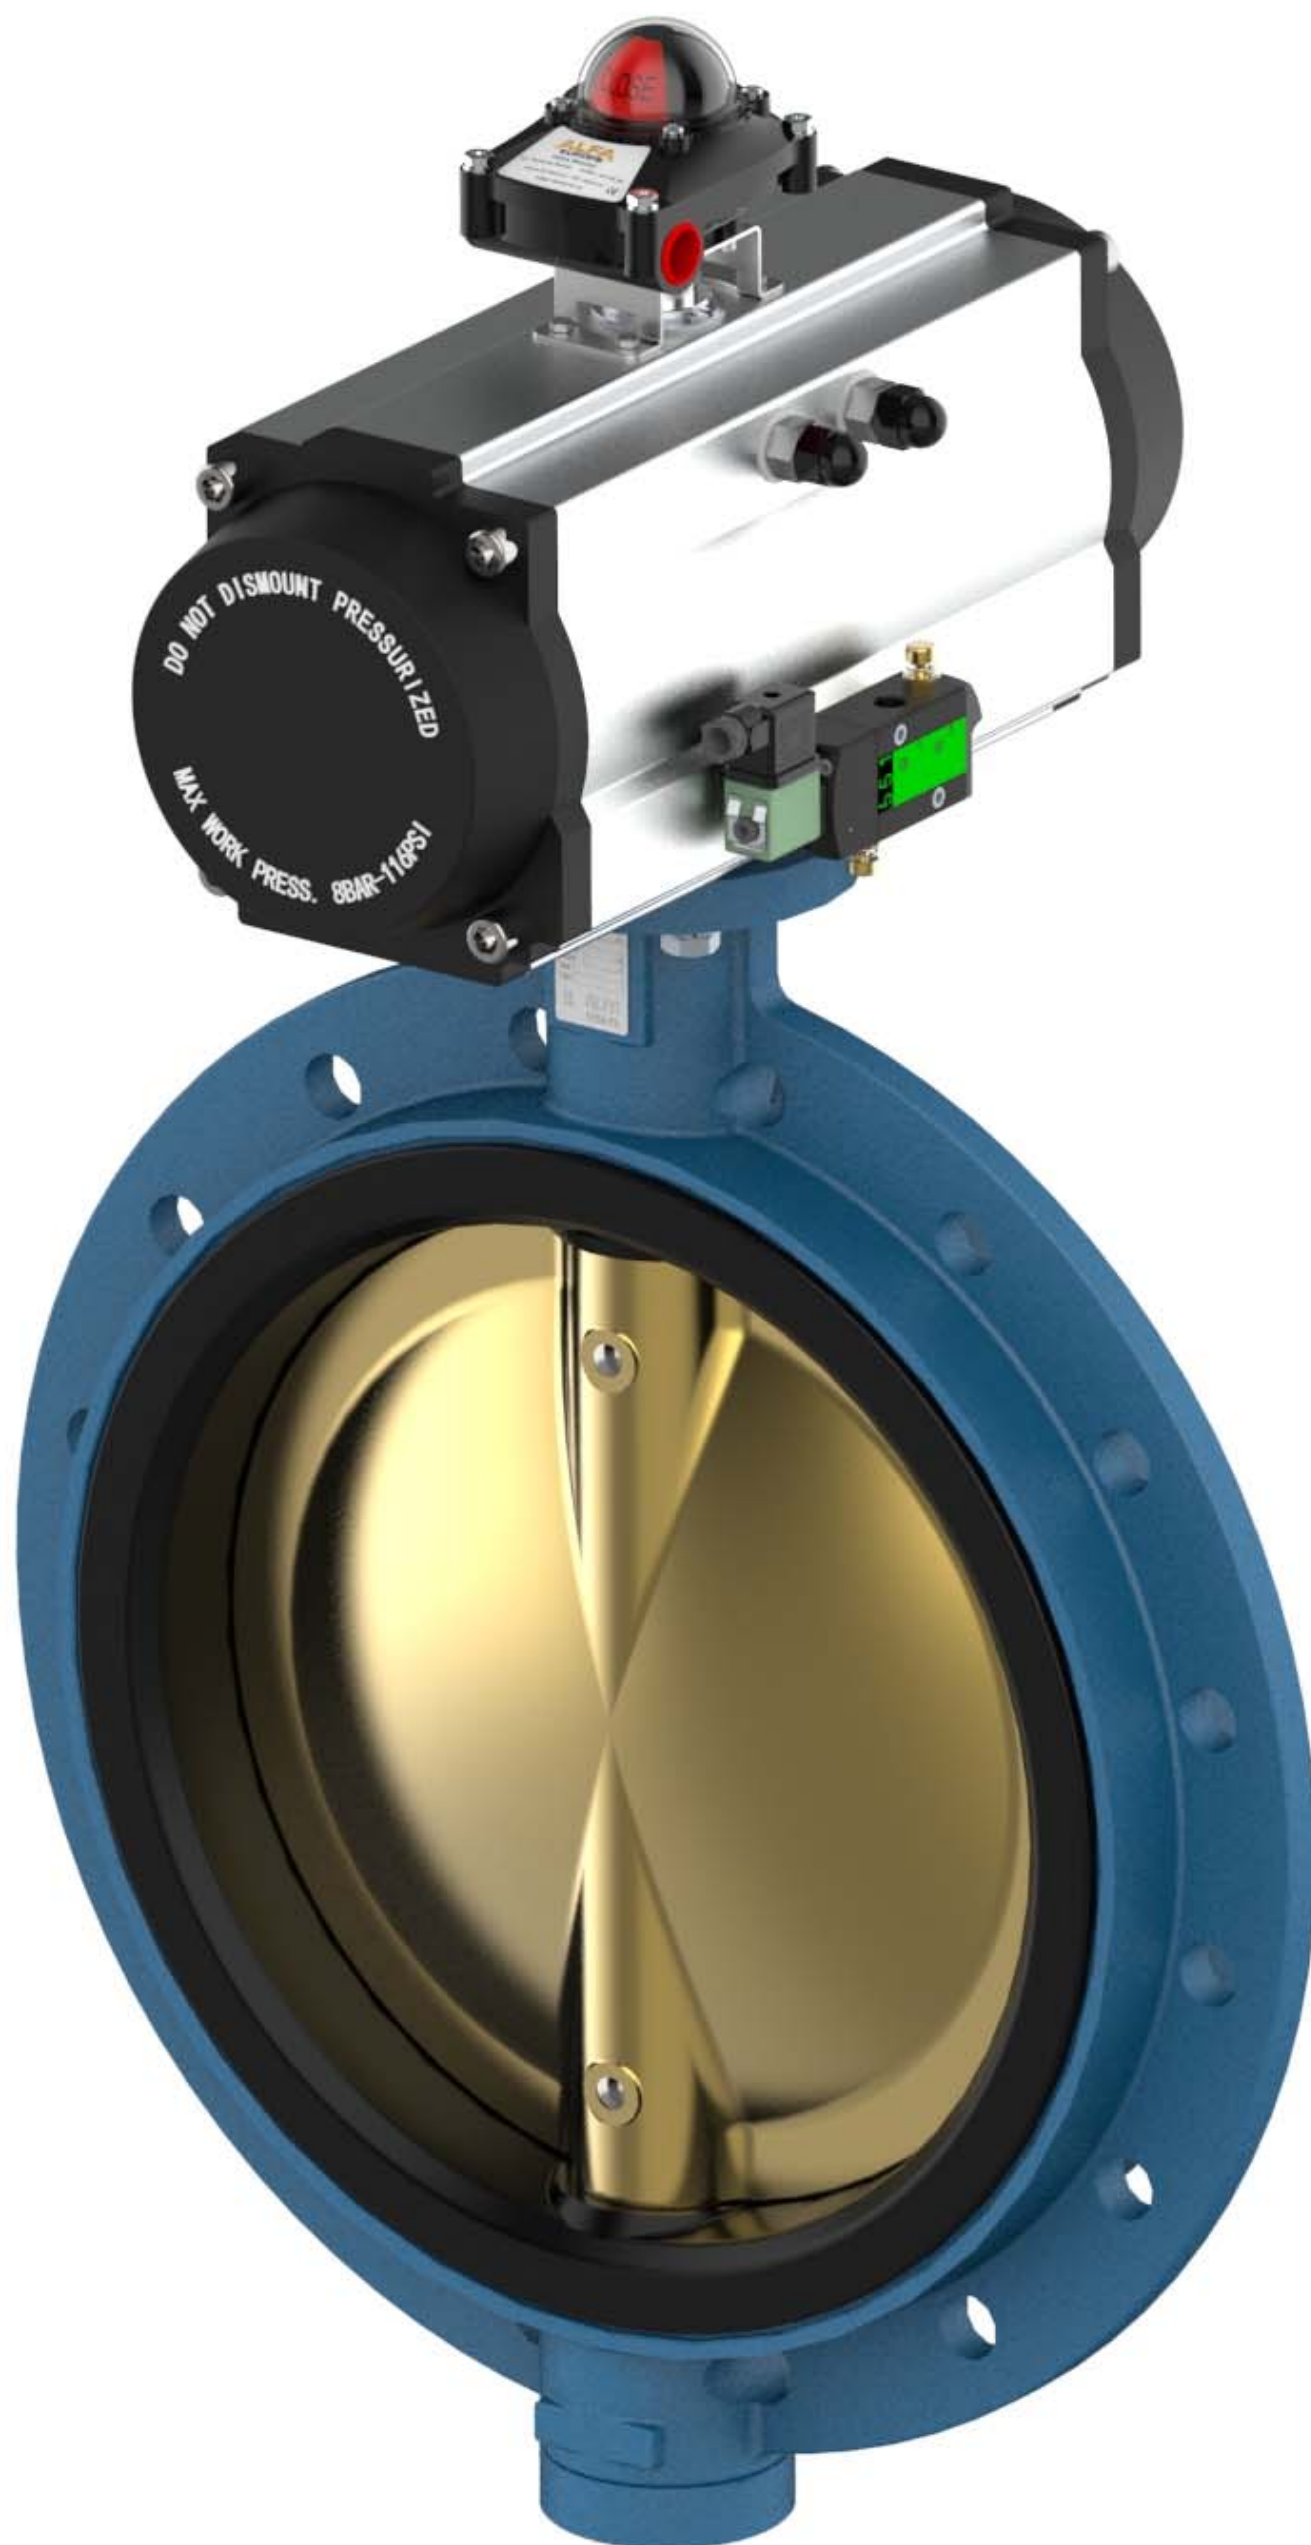


MONO TYPE S60 - PNEUMATIC ACTUATOR

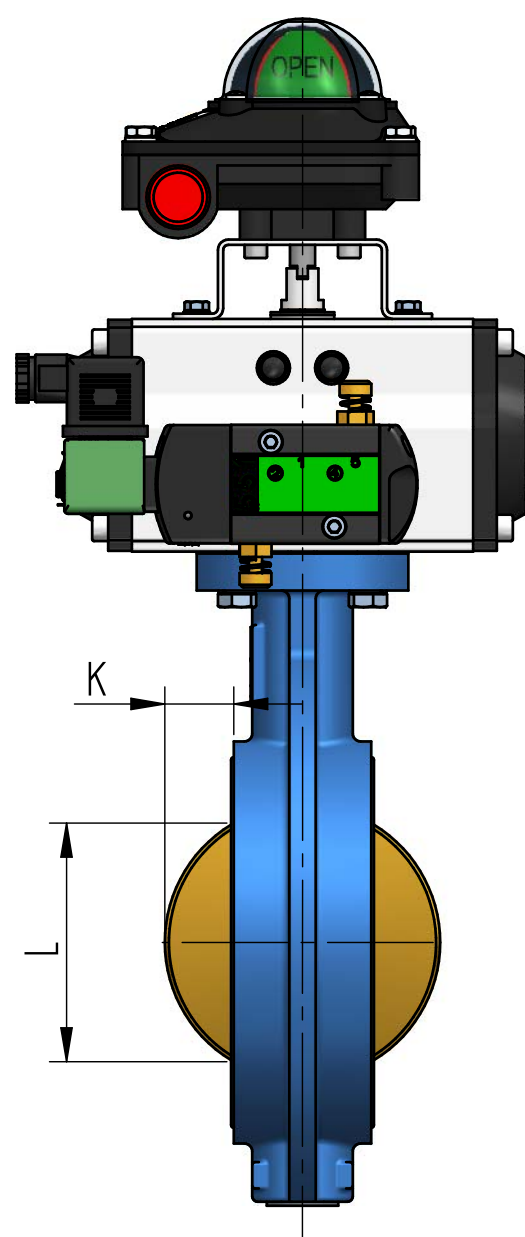

MONO TYPE S60 - PNEUMATIC ACTUATOR (DA) DN50 - DN200

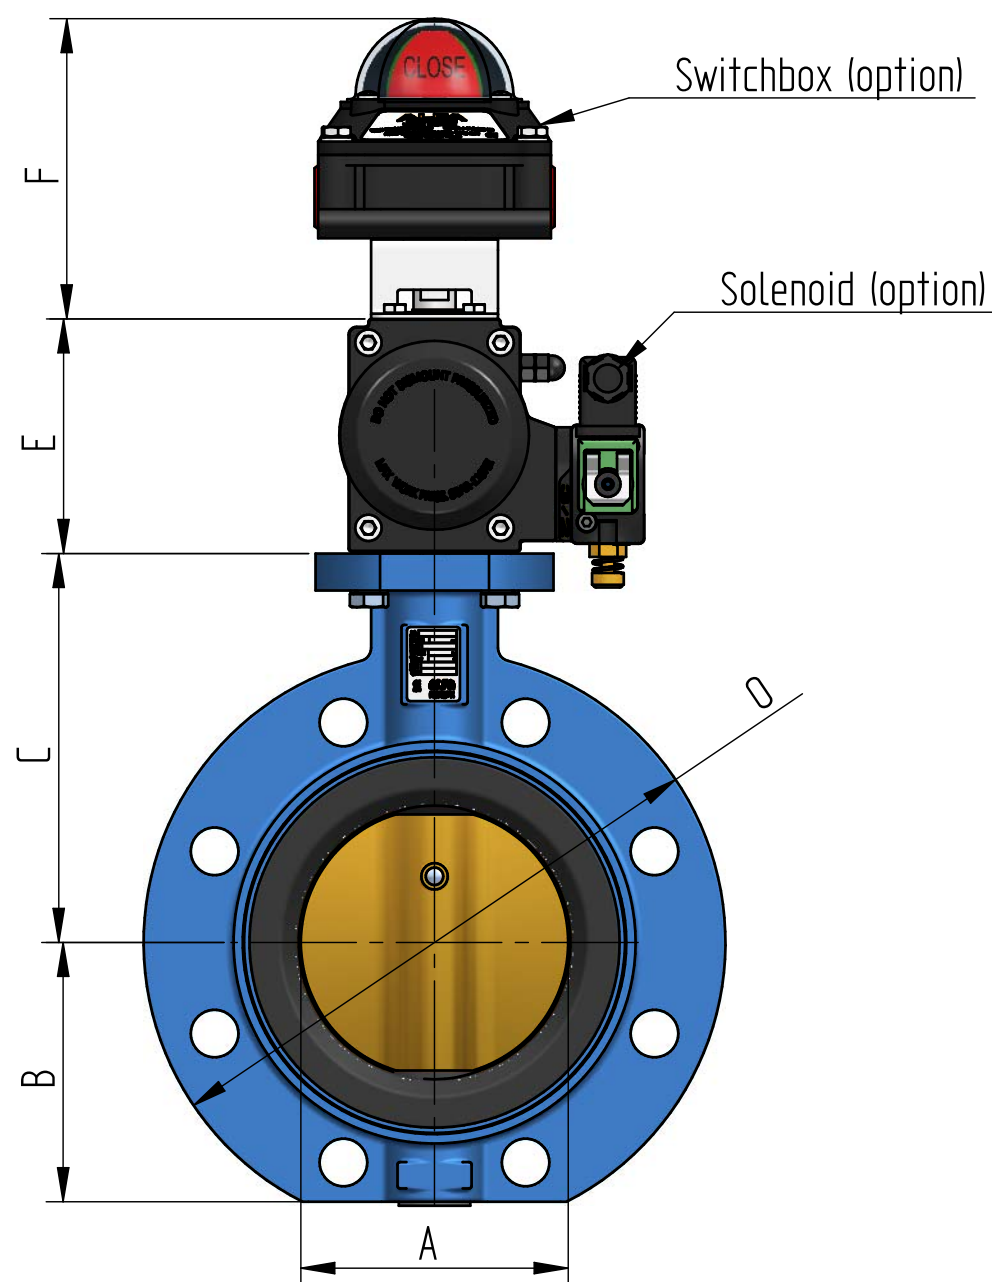


Size DN 50 to DN 200, Design EN593
Face to face acc. EN558.1 series 20
Flange connections: DIN PN6-10-16-25
ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
Temperature -40/+250°C
Various pressure ratings up to 25 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute

Standard available materials :



BODY	DISC	SHAFT	SEAT
EN-JS1030	BS 1400 AB2	SS 1.4122	NBR -15°C / +80°C
A216 WCB	EN-JS1030	SS 431	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	SD 2507	SD F53	Silicone -40°C / +230°C

Min. Air supply
pressure 6 bar.

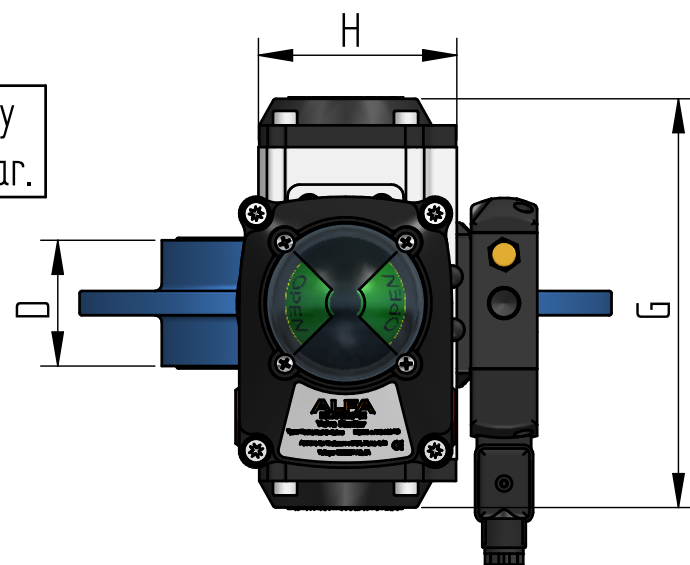

Size	PNEUMATIC	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 50	ALFA - 063 D	52	65	118	43	88	114	169	82	5	27	165	6.1
DN 65	ALFA - 063 D	63	78	126	46	88	114	169	82	9	43	185	6.9
DN 80	ALFA - 063 D	78	97	133	46	88	114	169	82	16	62	200	7.7
DN 100	ALFA - 063 D	103	98	147	52	88	114	169	82	26	90	220	9.2
DN 125	ALFA - 075 D	125	110	160	56	100	114	201	94	34	110	250	12.1
DN 150	ALFA - 083 D	155	133	180	56	108	114	209	101	50	145	285	18.7
DN 200	ALFA - 105 D	201	168	204	60	133	114	275	122	71	193	340	23.7

MONO TYPE S60 - PNEUMATIC ACTUATOR (DA) DN250 - DN600

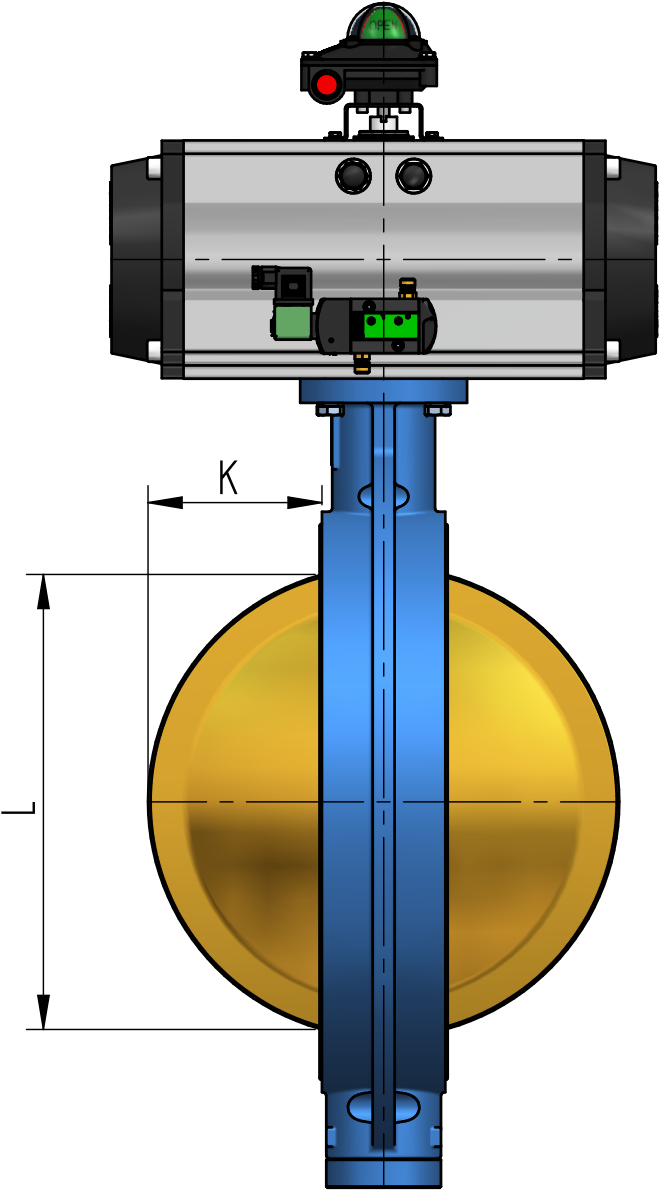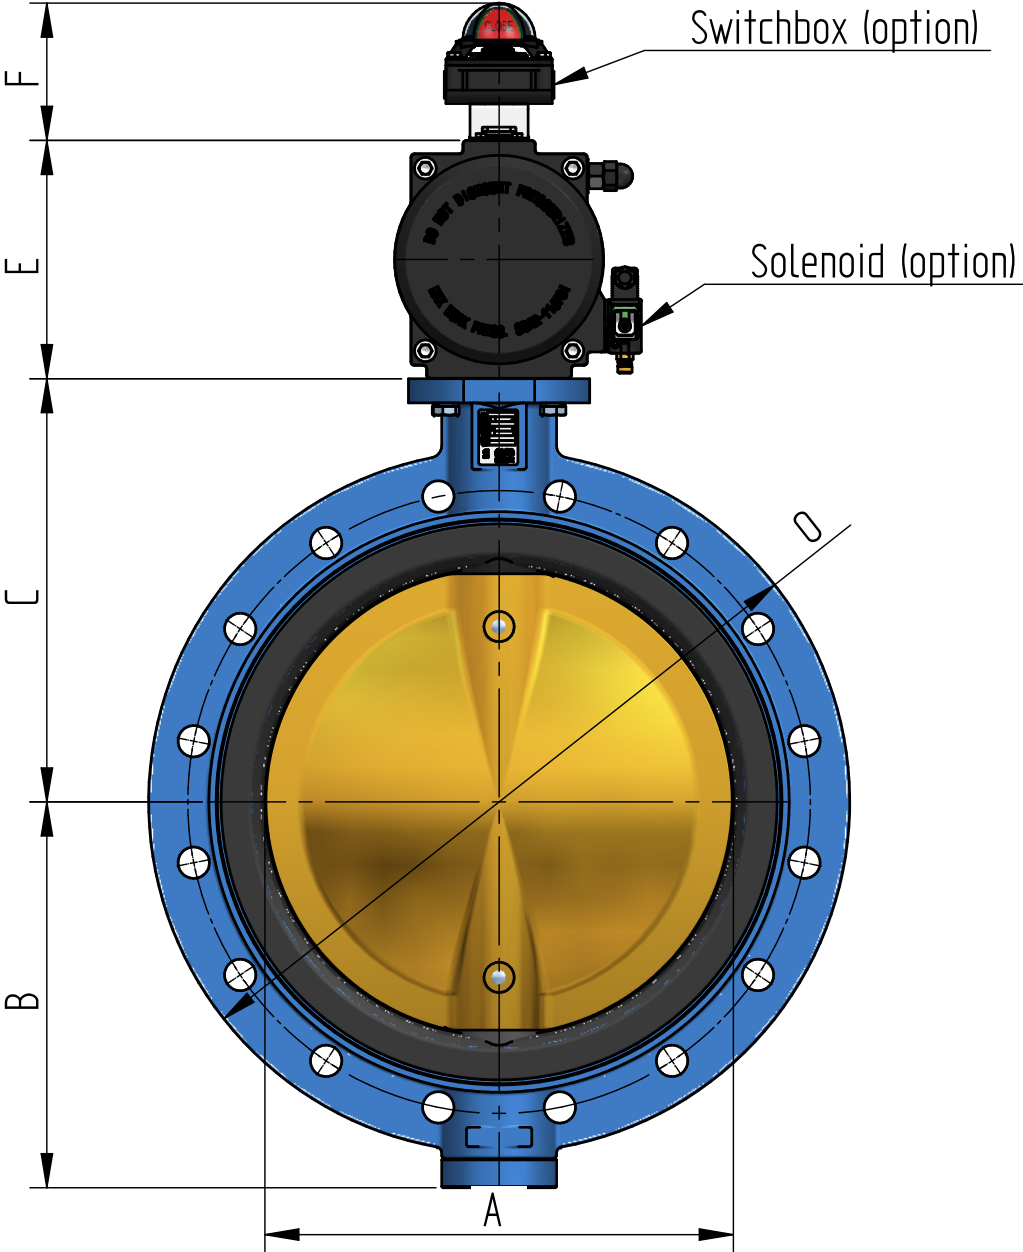


Size DN 250 to DN 600, Design EN593
Face to face acc. EN558.1 series 20
Flange connections: DIN PN6-10-16-25
ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
Temperature -40/+250°C
Various pressure ratings up to 25 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute

Standard available materials :

BODY	DISC	SHAFT	SEAT
EN-JS1030	BS 1400 AB2	SS 1.4122	NBR -15°C / +80°C
A216 WCB	EN-JS1030	SS 431	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	SD 2507	SD F53	Silicone -40°C / +230°C

Min. Air supply
pressure 6 bar.

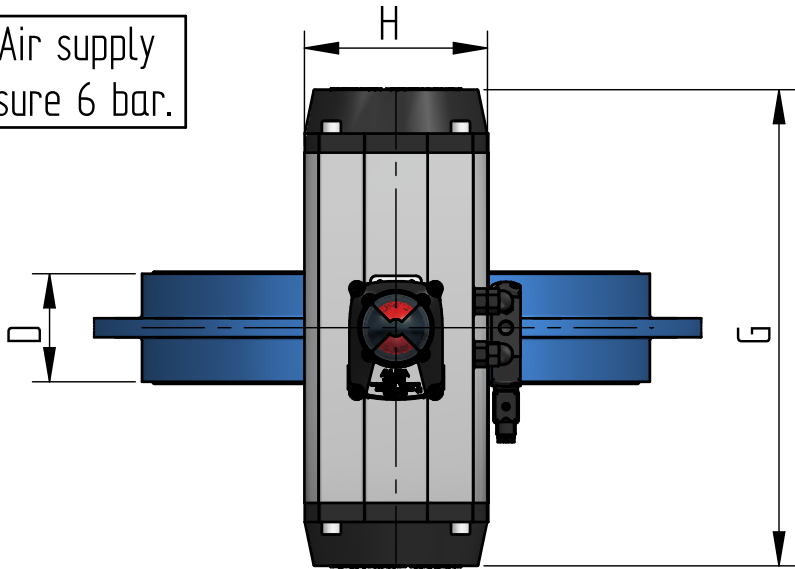

Size	PNEUMATIC	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 250	ALFA - 125 D	249	204	245	68	155	114	332	138	91	241	420	35.8
DN 300	ALFA - 140 D	302	239	270	78	172	114	385	153	112	291	455	52.1
DN 350	ALFA - 140 D	340	295	315	78	172	114	385	153	128	324	515	76.2
DN 400	ALFA - 160 D	397	320	350	102	197	114	450	174	144	376	580	103.1
DN 450	ALFA - 190 D	438	353	375	114	230	124	507	206	163	426	635	146.1
DN 500	ALFA - 210 D	489	387	415	127	255	124	562	226	182	475	715	191.6
DN 600	ALFA - 240 D	590	453	562	154	290	124	646	258	219	572	835	306.3