

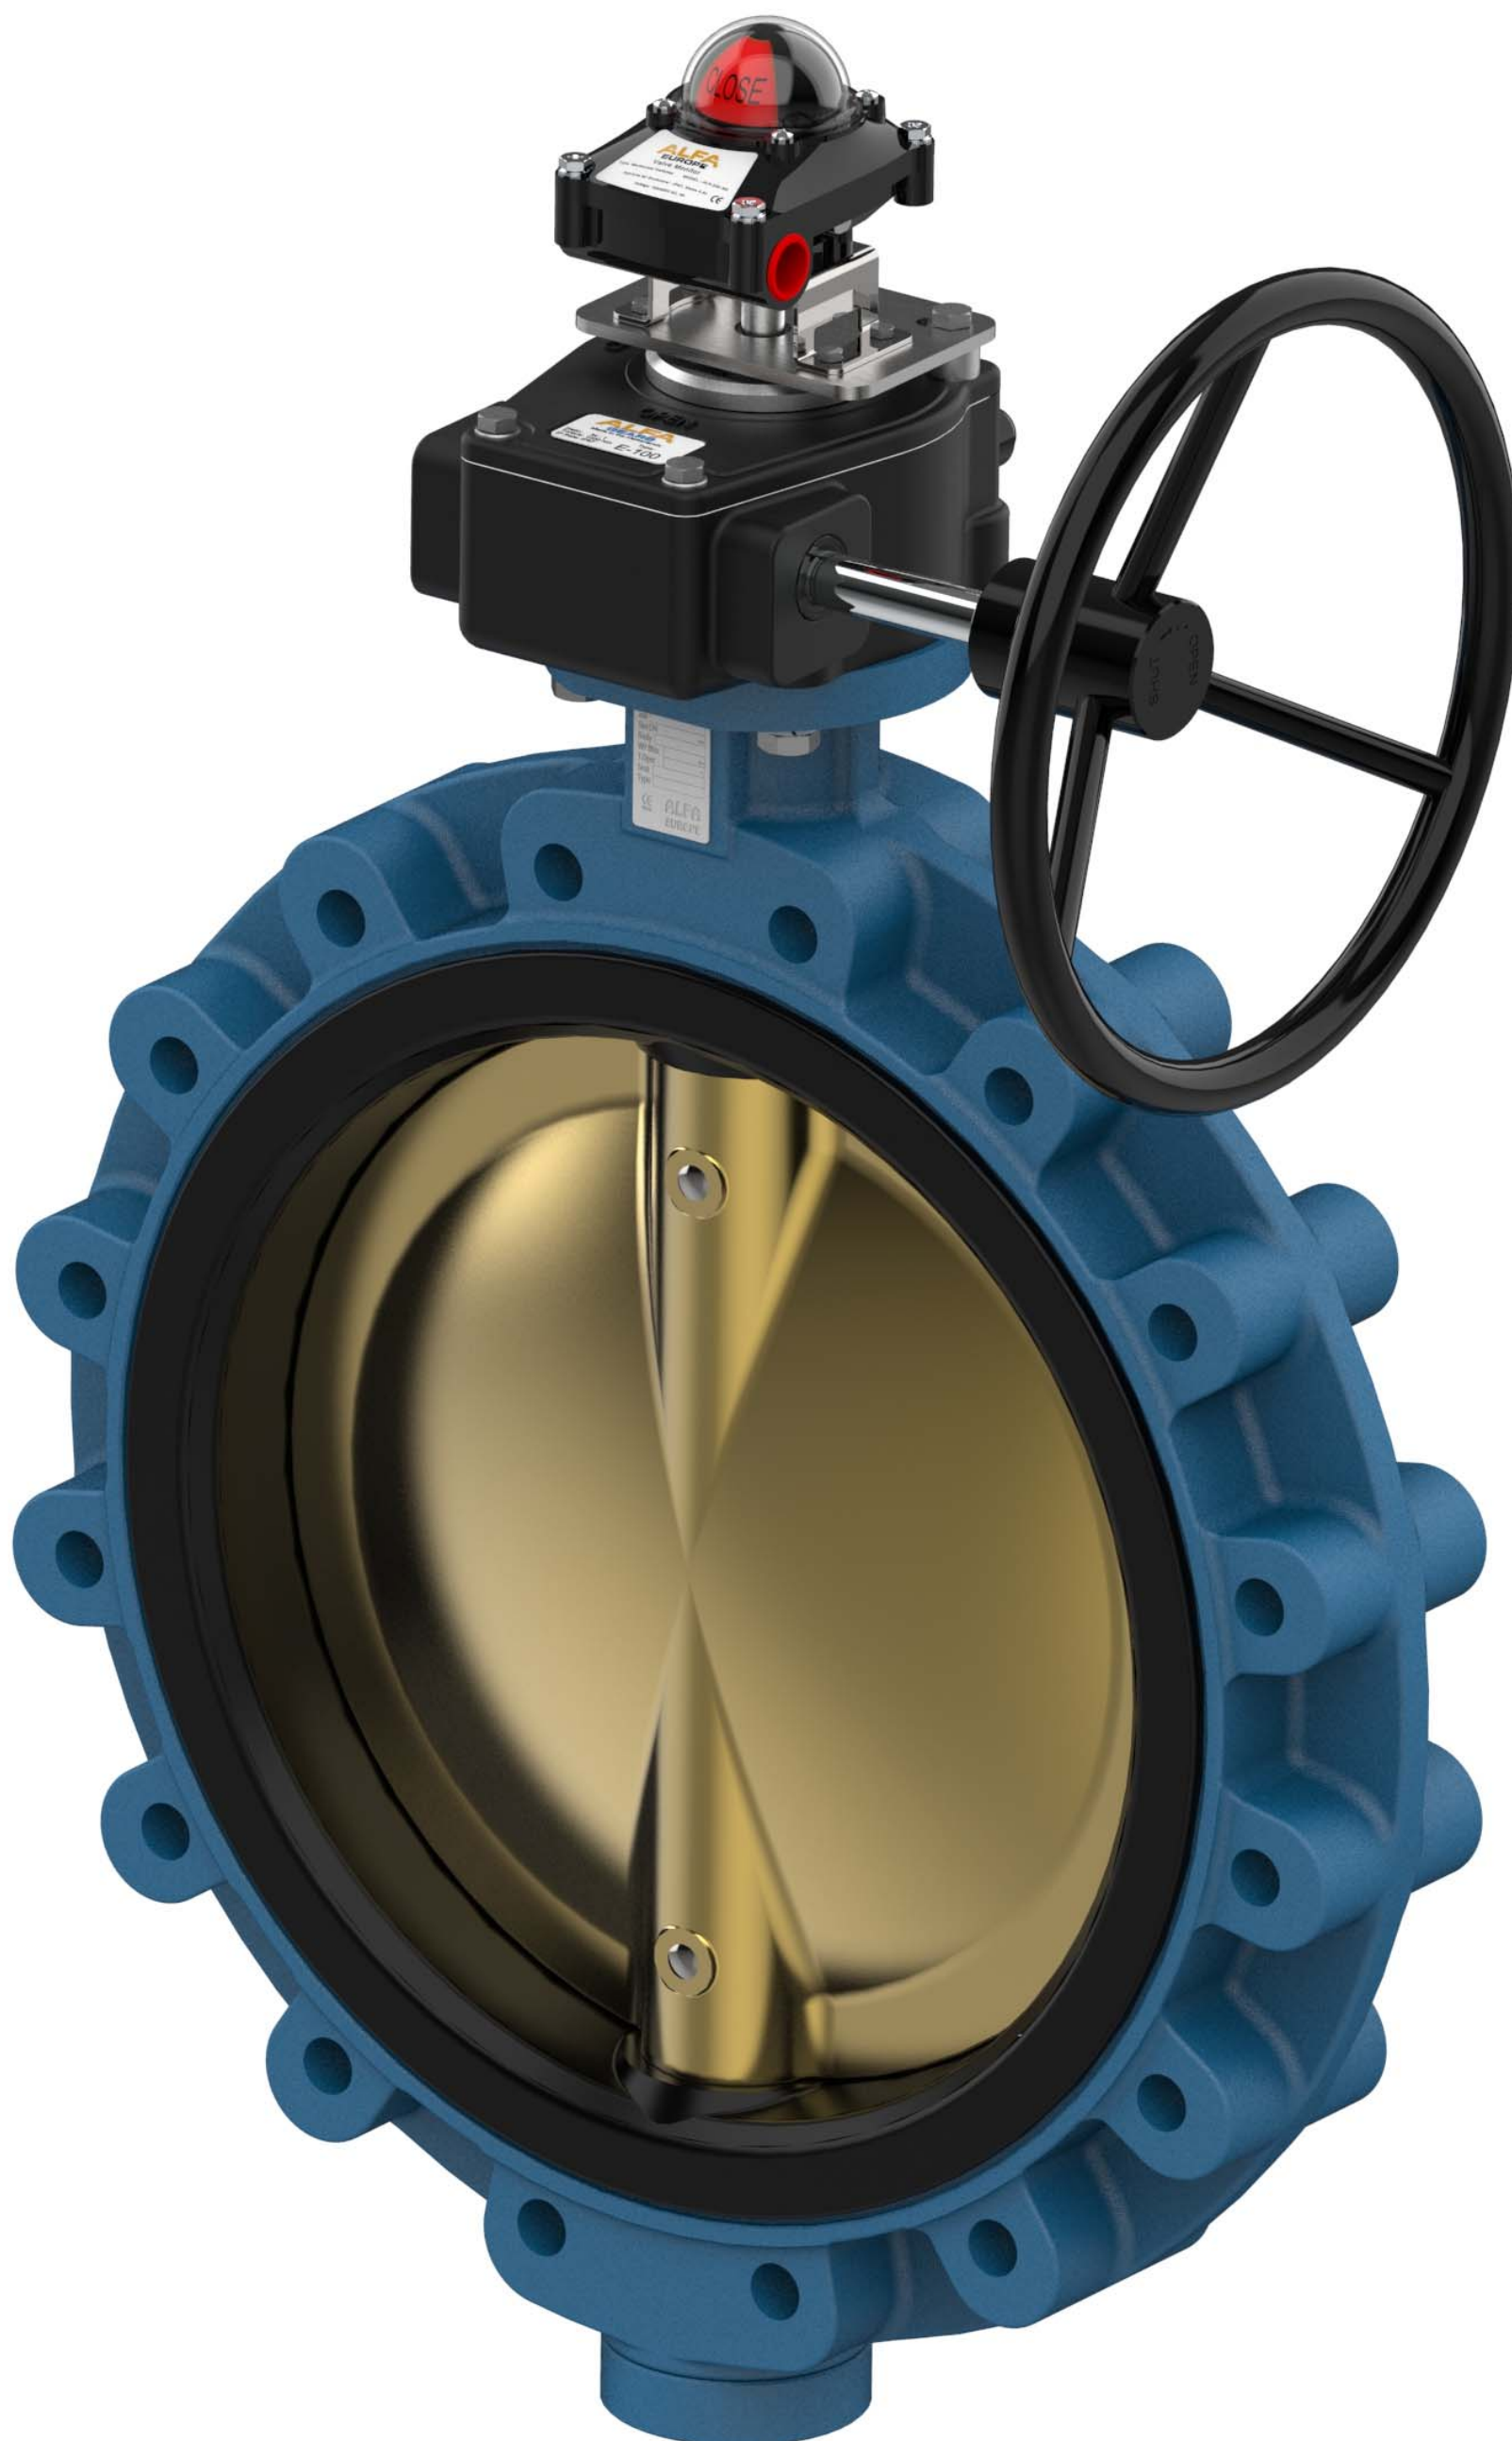
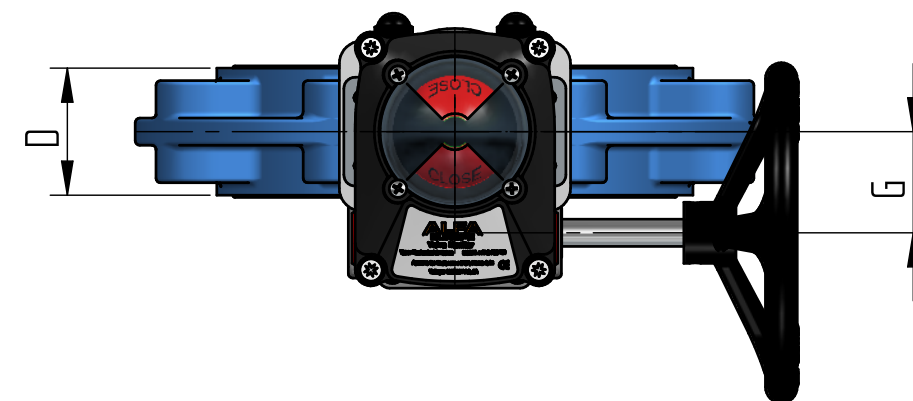


LUG TYPE S64 GEARBOX/SWITCHBOX OPERATED

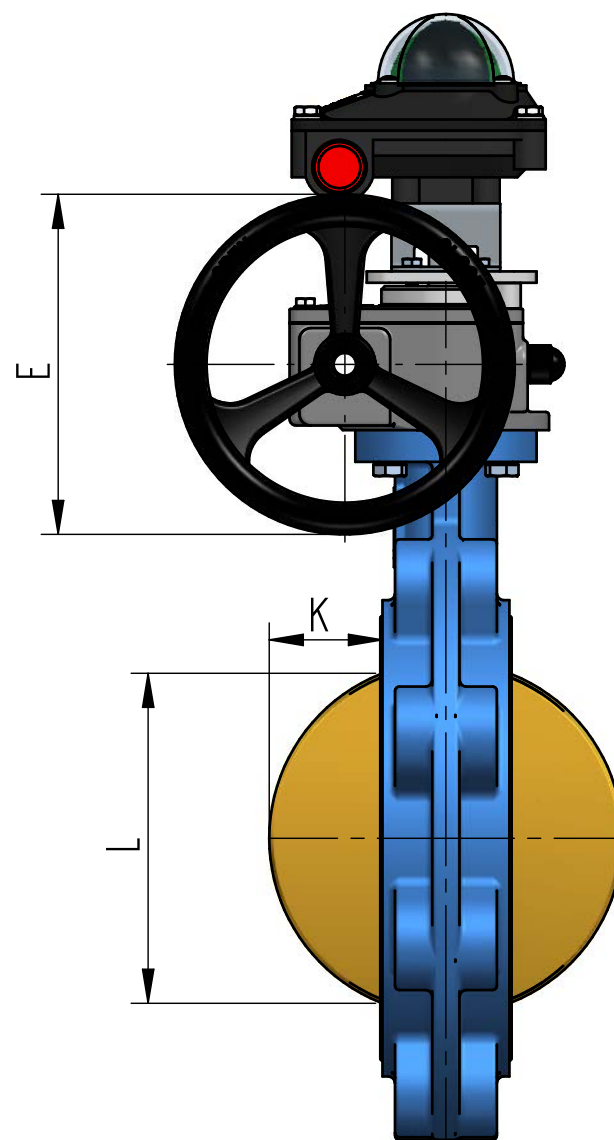

LUG TYPE S64 - GEARBOX/SWITCHBOX OPERATED DN40 - DN150

Size DN 40 to DN 150, Design EN593
Face to face acc. EN558.1 series 20
Flange connections: DIN PN6-10-16-25
ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
Temperature -40/+250°C
Various pressure ratings up to 25 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute


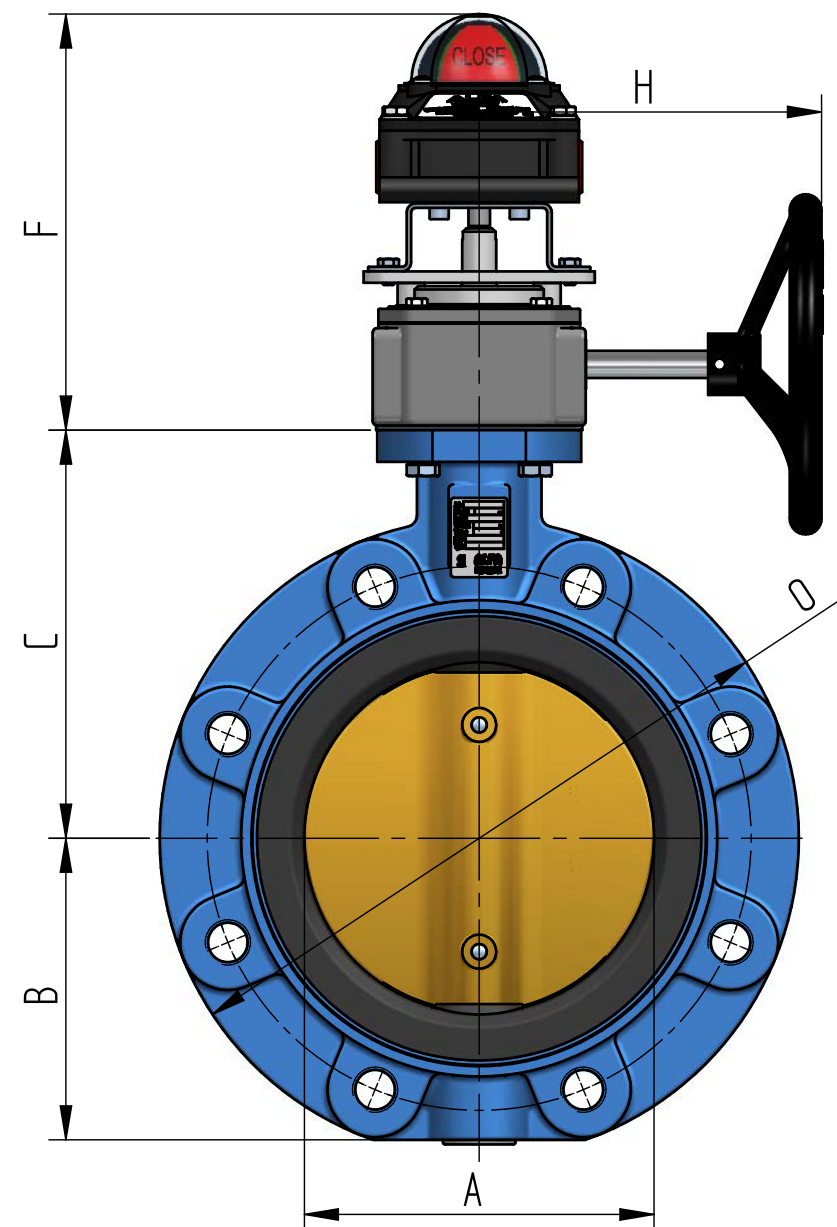


Standard available materials :

BODY	DISC	SHAFT	SEAT
EN-JS1030	BS 1400 AB2	SS 1.4122	NBR -15°C / +80°C
A216 WCB	EN-JS1030	SS 431	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	SD 2507	SD F53	Silicone -40°C / +230°C

Size	Gearbox	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 40	ALFA - 12	41	58	113	33	SC-125	173	36.5	117	4	24	147	7.0
DN 50	ALFA - 12	52	65	118	43	SC-125	173	36.5	117	5	27	162	8.2
DN 65	ALFA - 12	63	73	126	46	SC-125	173	36.5	117	9	43	182	9.1
DN 80	ALFA - 12	78	95	133	46	SC-125	173	36.5	117	16	62	197	10.7
DN 100	ALFA - 25	103	102	147	52	SC-150	184	36.5	151	26	90	217	12.5
DN 125	ALFA - 25	125	116	160	56	SC-150	184	36.5	151	34	110	247	15.0
DN 150	ALFA - 25	155	133	180	56	SC-150	184	36.5	151	50	145	282	17.6


LUG TYPE S64 - GEARBOX/SWITCHBOX OPERATED DN200 - DN600

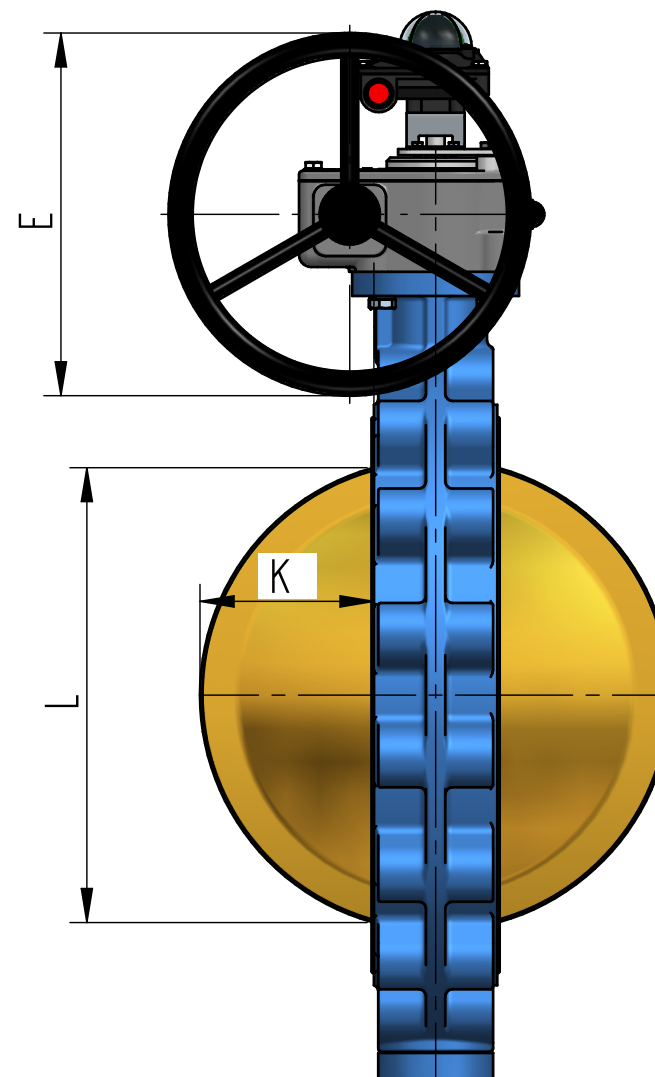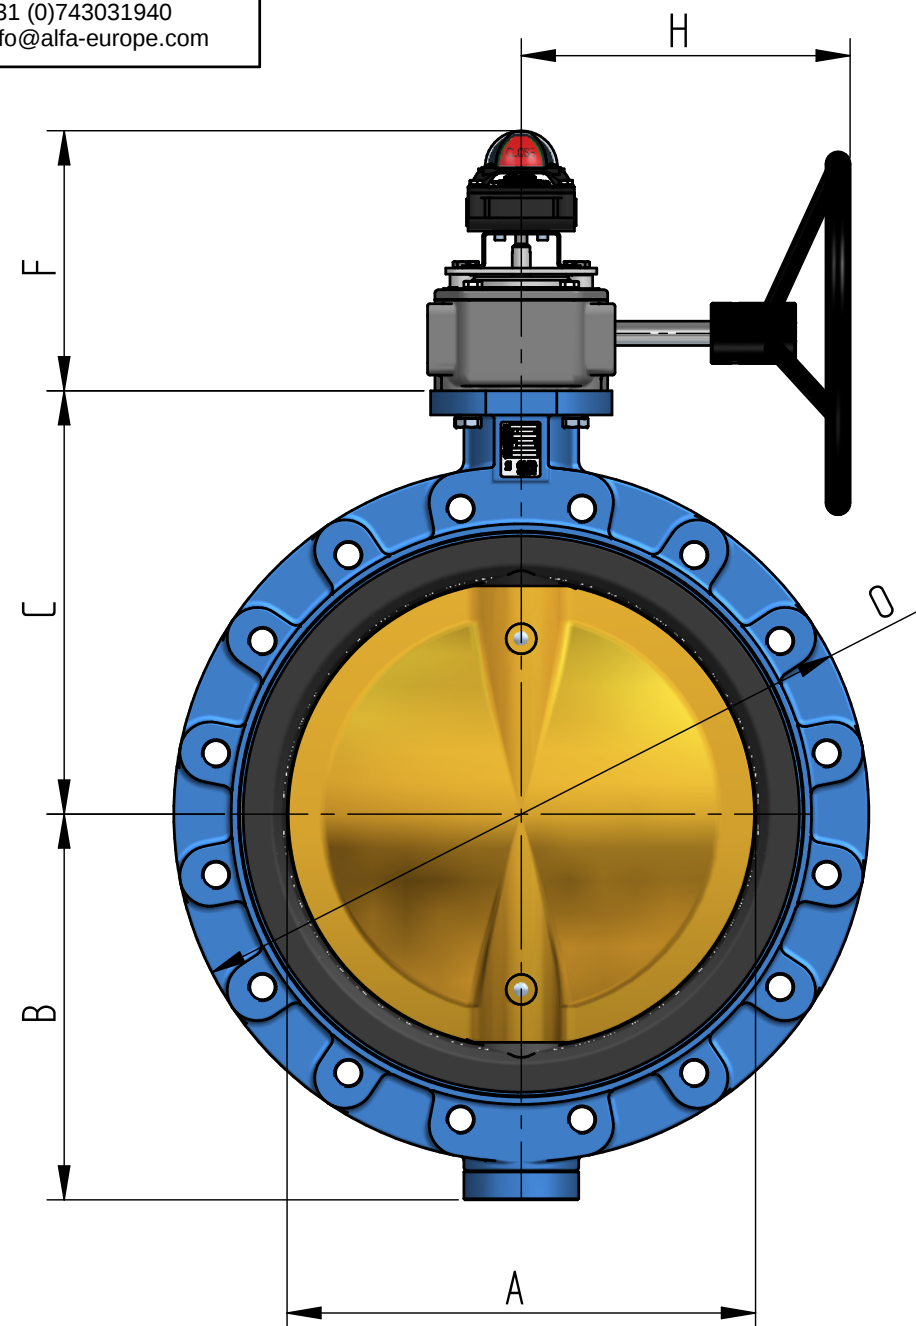

Size DN 200 to DN 600, Design EN593
 Face to face acc. EN558.1 series 20
 Flange connections: DIN PN6-10-16-25
 ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
 Temperature -40/+250°C
 Various pressure ratings up to 25 bar
 Top flange according ISO 5211
 Vacuum to 1*10⁻³ 0.2 Torr absolute



Standard available materials :

BODY	DISC	SHAFT	SEAT
EN-JS1030	BS 1400 AB2	SS 1.4122	NBR -15°C / +80°C
A216 WCB	EN-JS1030	SS 431	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	SD 2507	SD F53	Silicone -40°C / +230°C

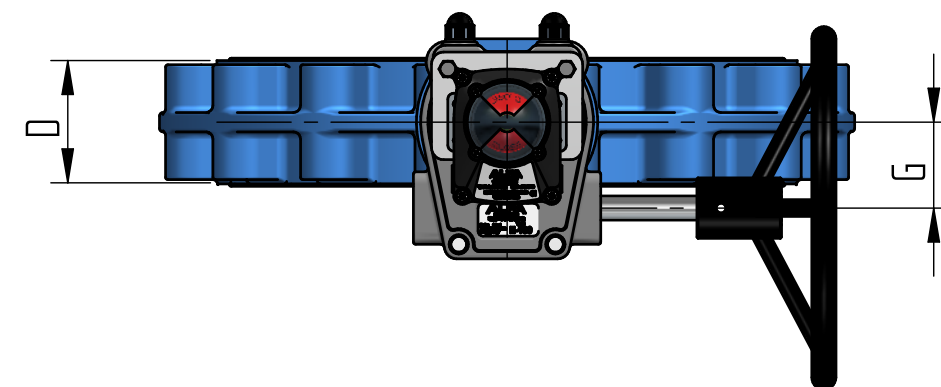

Size	GEARBOX	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 200	ALFA - 25	201	160	204	60	SC-150	184	44.6	151	71	193	337	22.8
DN 250	ALFA - 55	249	194	245	68	SW-250	192	55	235	91	241	401	38.5
DN 300	ALFA - 55	302	221	270	78	SW-250	192	55	235	112	291	456	51.7
DN 350	ALFA - 100	340	295	315	78	SW-300	215	71	272	128	324	520	84.5
DN 400	ALFA - 100	397	319	350	102	SW-300	215	71	272	144	376	575	111.5
DN 450	ALFA - 200	438	353	375	114	SW-400	222	86	310	163	426	635	153.2
DN 500	ALFA - 200	489	387	415	127	SW-400	222	86	310	182	475	705	191.7
DN 600	ALFA - 350	590	453	562	154	SW-500	226	104.5	336	219	572	835	283.8


LUG TYPE S64 - GEARBOX/SWITCHBOX OPERATED DN700 - DN1000

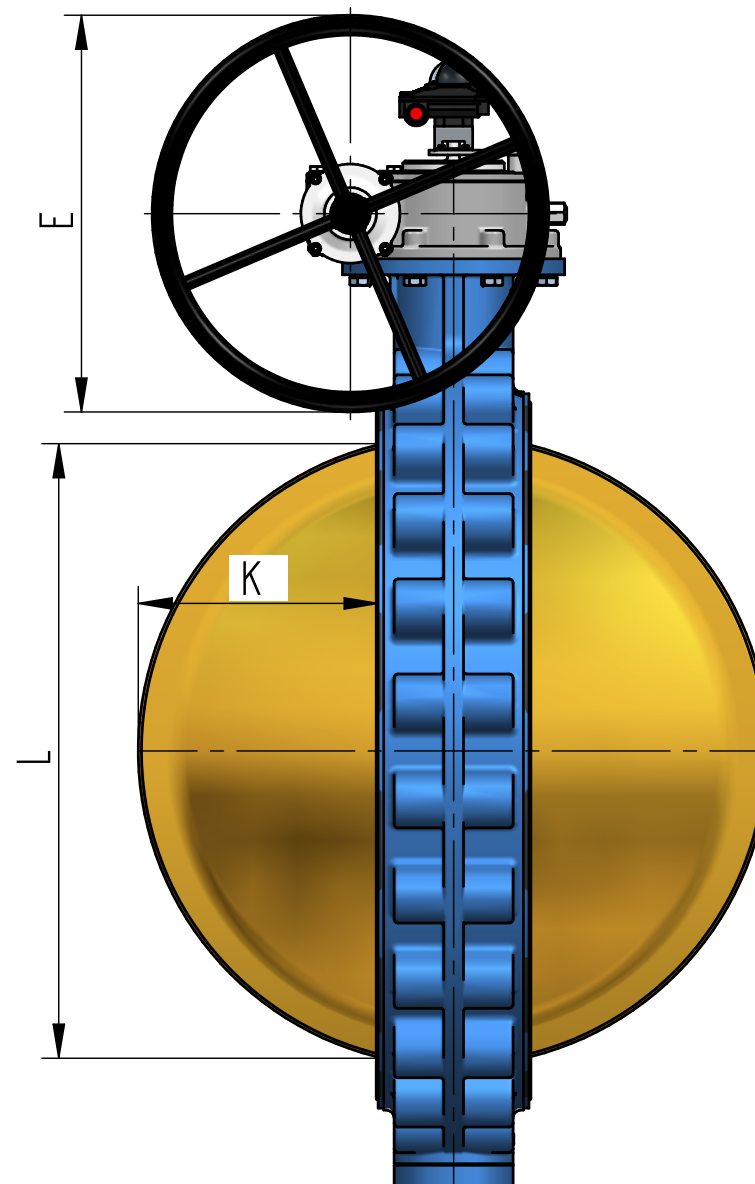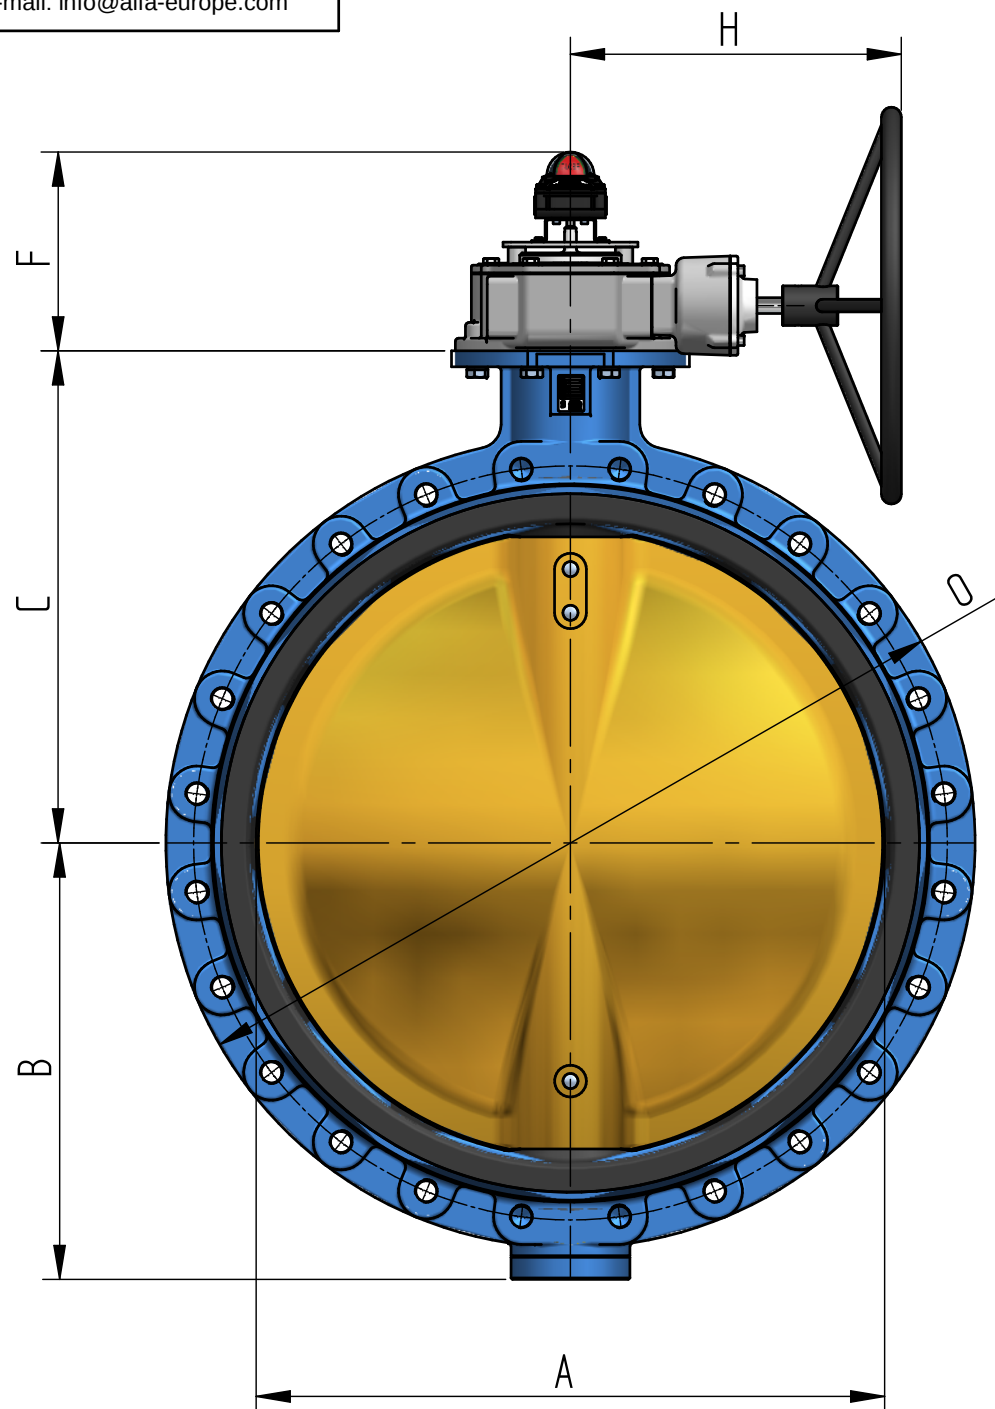

Size DN 700 to DN 1000, Design EN593
Face to face acc. EN558.1 series 20
Flange connections: DIN PN6-10-16-25
ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
Temperature -40/+250°C
Various pressure ratings up to 16 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute

Standard available materials :

BODY	DISC	SHAFT	SEAT
EN-JS1030	BS 1400 AB2	SS 1.4122	NBR -15°C / +80°C
A216 WCB	EN-JS1030	SS 431	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	SD 2507	SD F53	Silicone -40°C / +230°C

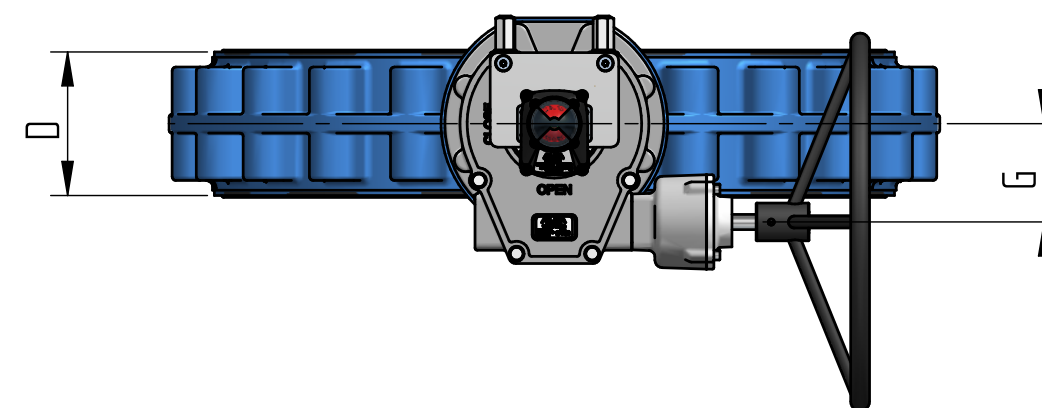

Size	GEARBOX	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 700	ALFA - 700 / 6	692	491	560	165	SW-500	251	130	420	265	676	800	322
DN 800	ALFA - 900 / 4	792	550	620	190	SW-500	250	150	435	302	772	905	458
DN 900	ALFA - 1100 / 6	861	615	675	203	SW-500	250	150	435	330	840	1005	603
DN 1000	ALFA - 1100 / 6	961	668	735	216	SW-500	250	150	435	374	940	1115	753