

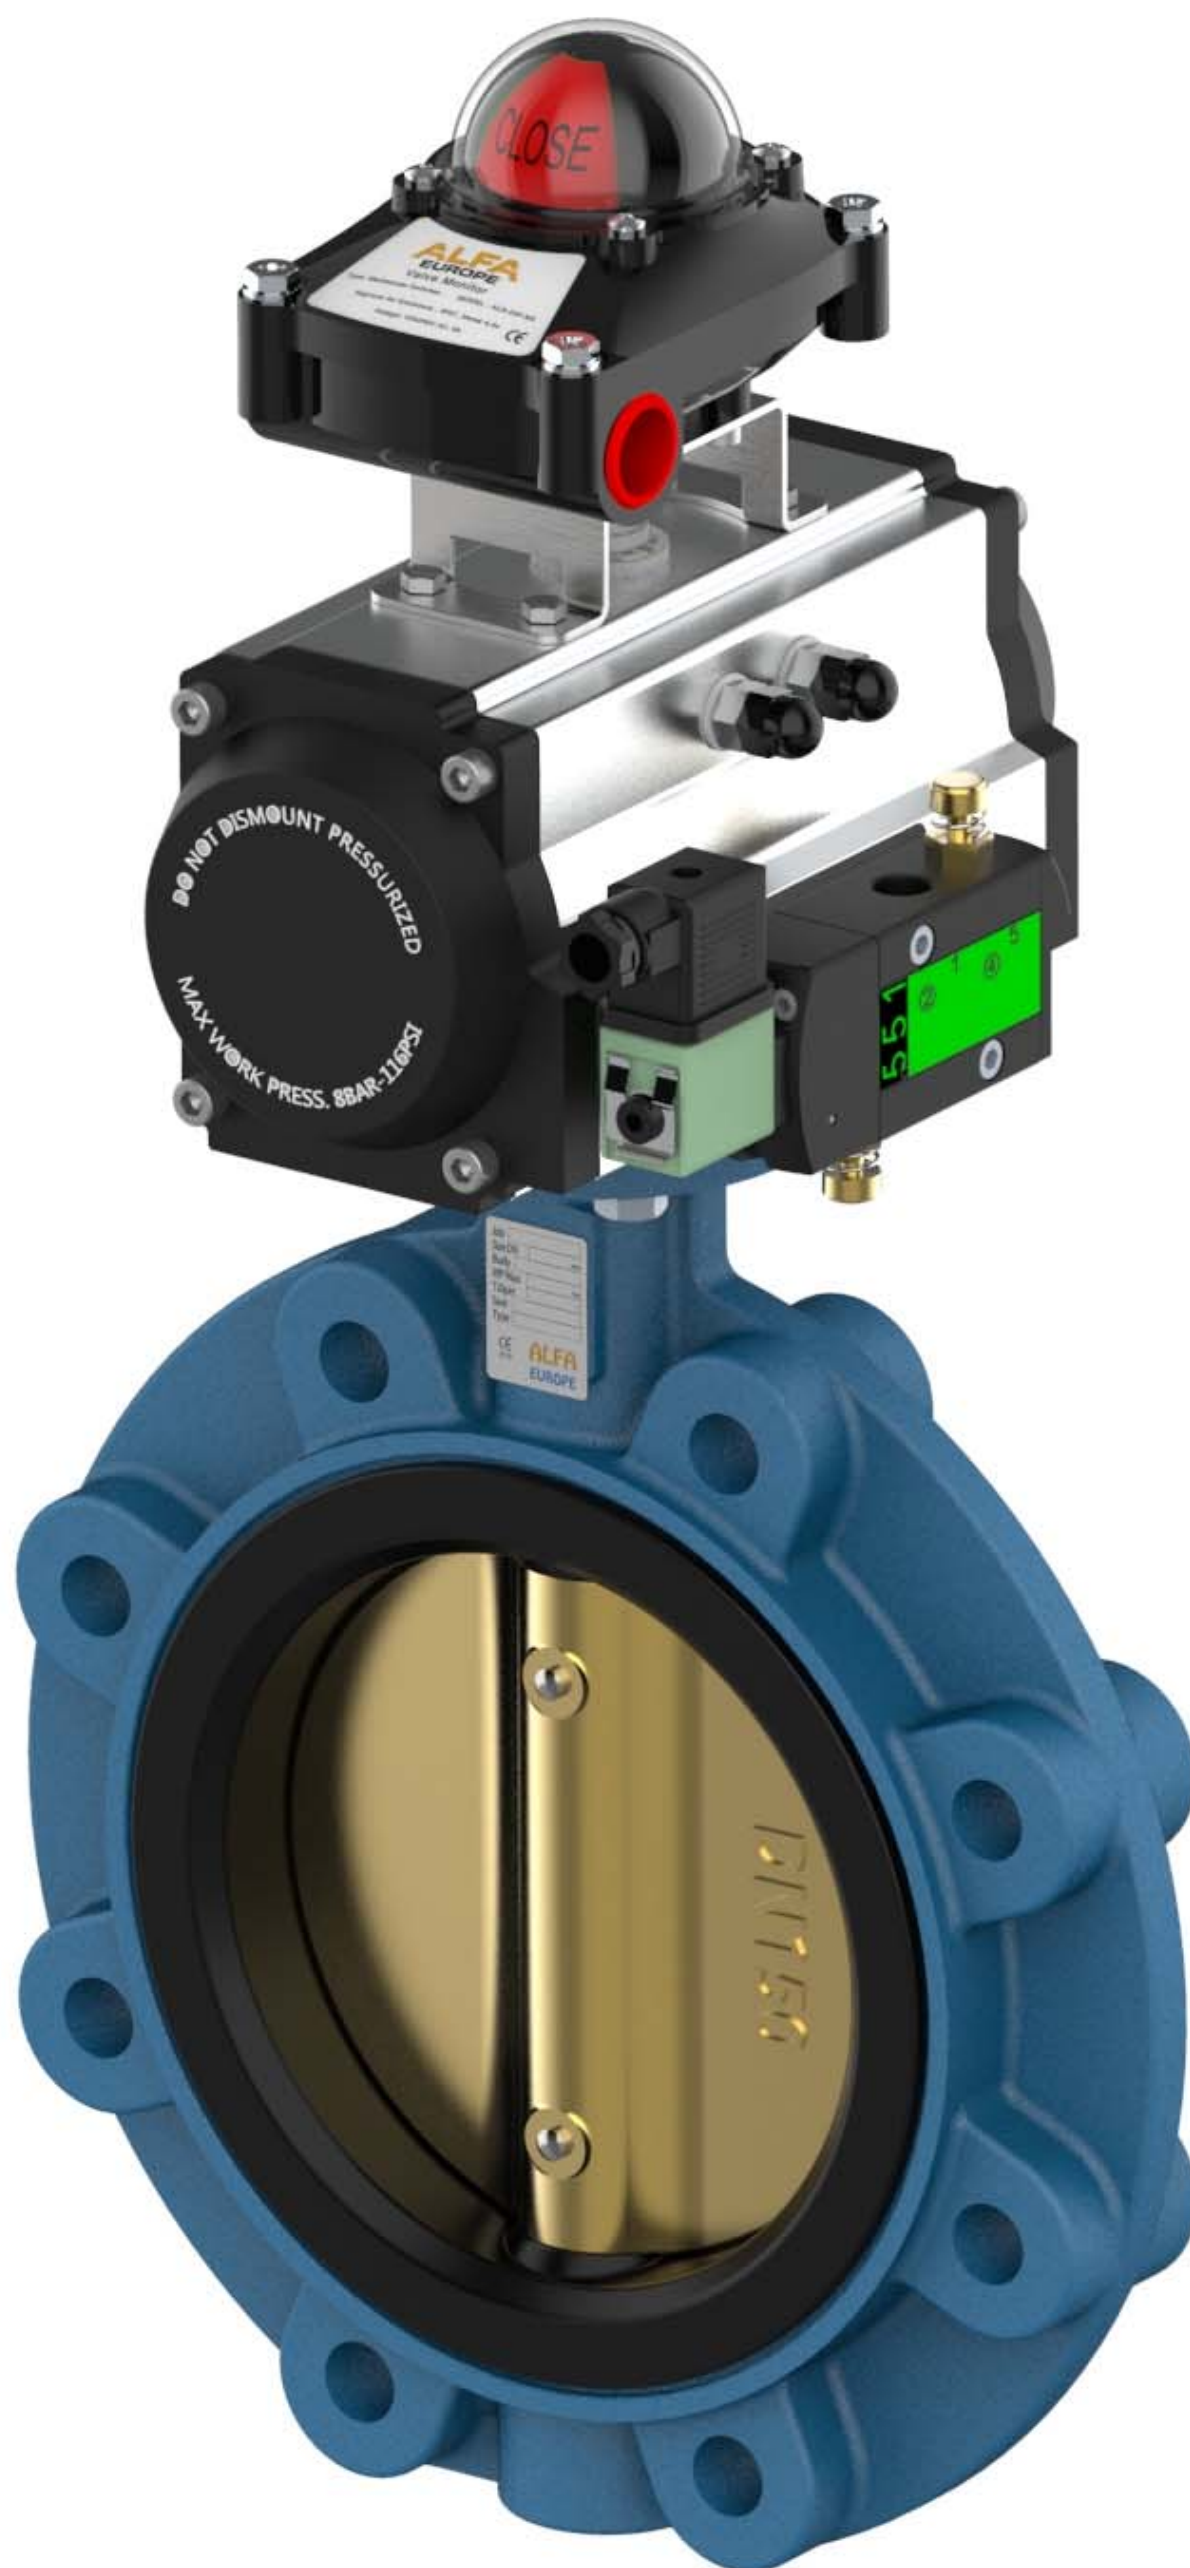


LUG TYPE S64 PNEUMATIC ACTUATOR (DA)

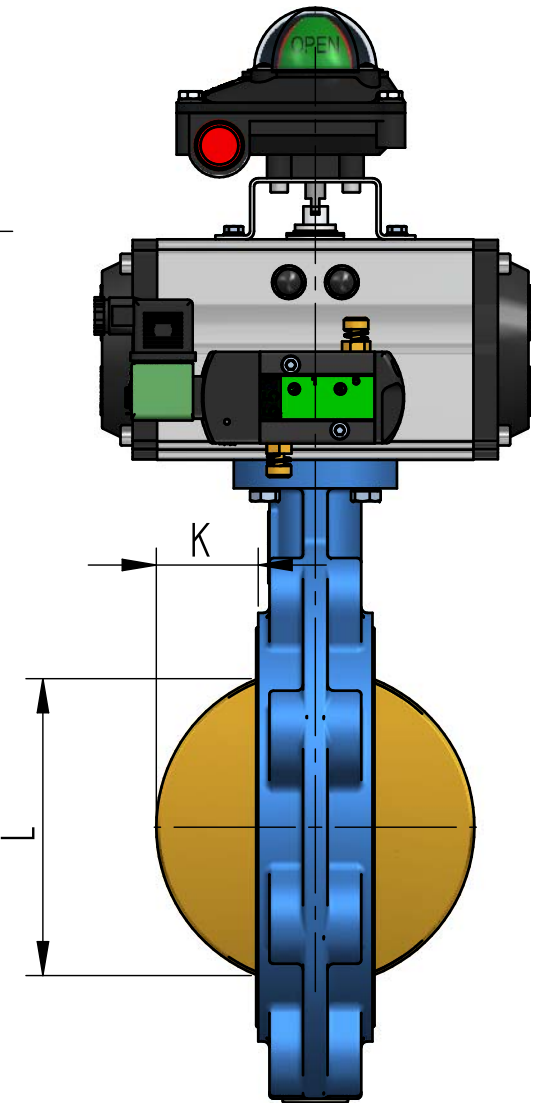

LUG TYPE S64 - PNEUMATIC ACTUATOR (DA) DN40 - DN300

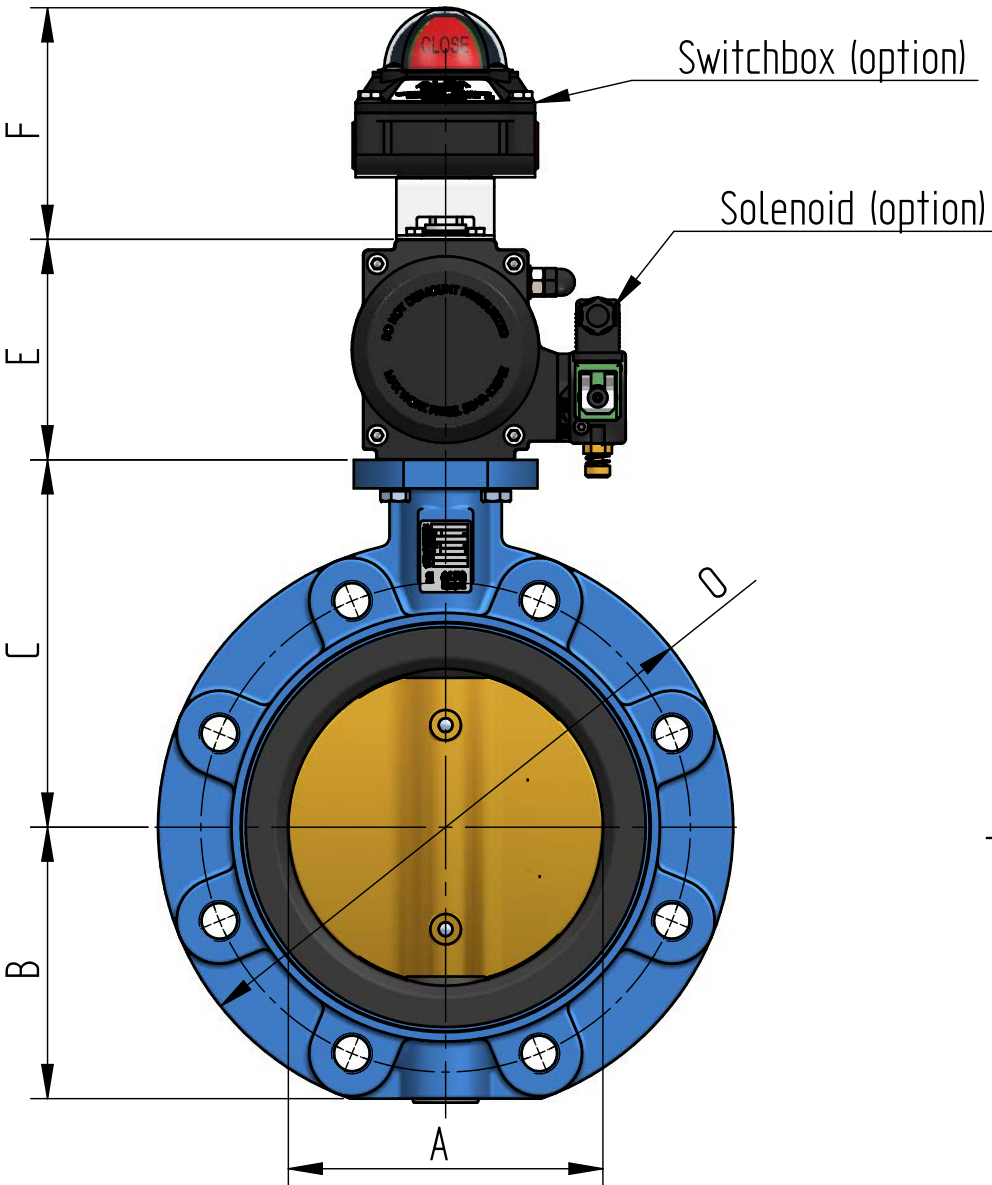


Size DN 40 to DN 300, Design EN593
Face to face acc. EN558.1 series 20
Flange connections: DIN PN6-10-16-25
ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
Temperature -40/+250°C
Various pressure ratings up to 25 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute

Standard available materials :



BODY	DISC	SHAFT	SEAT
EN-JS1030	BS 1400 AB2	SS 1.4122	NBR -15°C / +80°C
A216 WCB	EN-JS1030	SS 431	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	SD 2507	SD F53	Silicone -40°C / +230°C

Min. Air supply
pressure 6 bar.

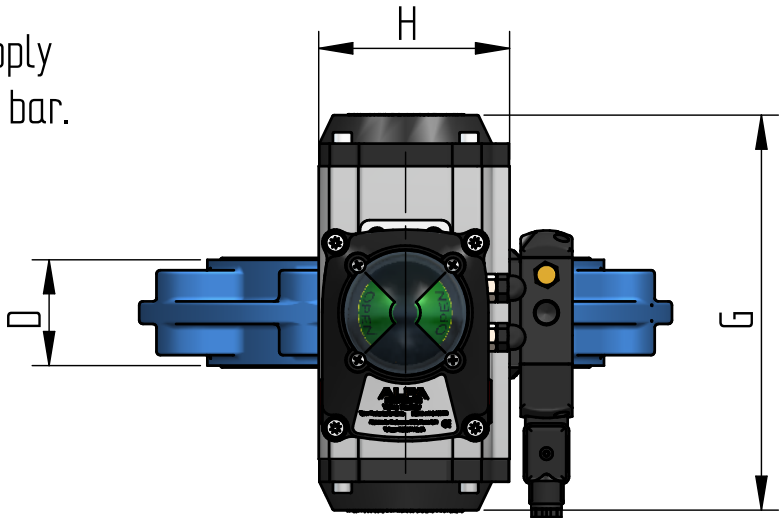

Size	PNEUMATIC	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 40	ALFA - 063 D	41	58	113	33	88	114	169	82	5	27	147	5.7
DN 50	ALFA - 063 D	52	65	118	43	88	114	169	82	5	31	162	6.9
DN 65	ALFA - 063 D	63	73	126	46	88	114	169	82	9	45	182	7.8
DN 80	ALFA - 063 D	78	95	133	46	88	114	169	82	16	64	197	9.4
DN 100	ALFA - 063 D	103	102	147	52	88	114	169	82	26	90	217	11.0
DN 125	ALFA - 075 D	125	116	160	56	100	114	201	94	34	110	247	14.1
DN 150	ALFA - 083 D	155	133	180	56	108	114	209	101	50	146	282	17.2
DN 200	ALFA - 105 D	201	160	204	60	133	114	275	122	71	194	337	26.0
DN 250	ALFA - 125 D	249	194	245	68	155	114	332	138	91	241	401	40.6
DN 300	ALFA - 140 D	302	221	270	78	172	114	385	153	112	325	456	58.2

LUG TYPE S64 - PNEUMATIC ACTUATOR (DA) DN350 - DN1000

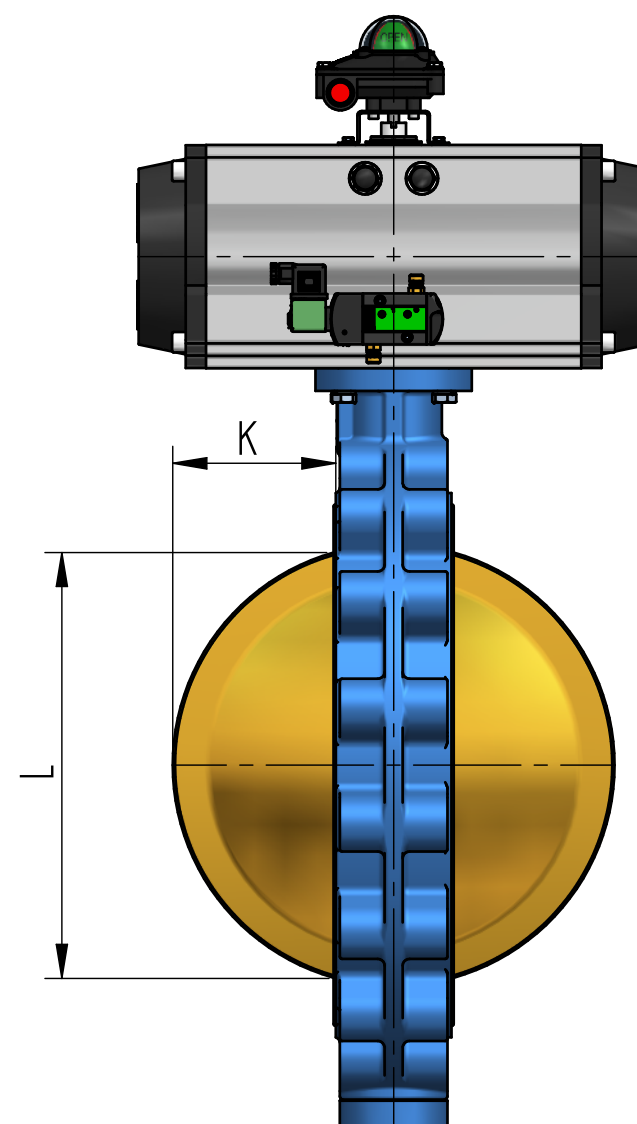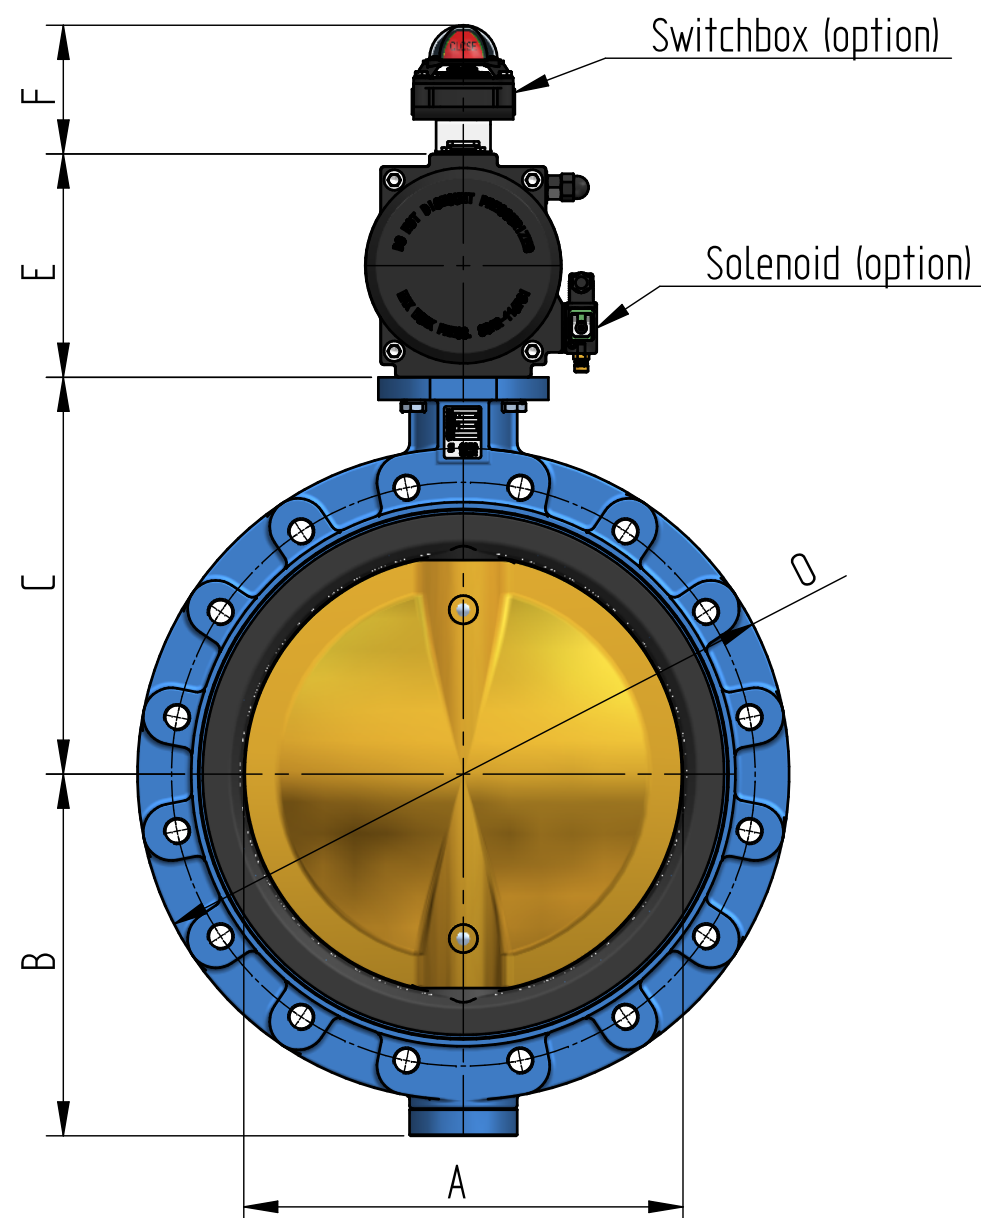


Size DN 350 to DN 1000, Design EN593
Face to face acc. EN558.1 series 20
Flange connections: DIN PN6-10-16-25
ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
Temperature -40/+250°C
Various pressure ratings up to 25 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute

Standard available materials :

BODY	DISC	SHAFT	SEAT
EN-JS1030	BS 1400 AB2	SS 1.4122	NBR -15°C / +80°C
A216 WCB	EN-JS1030	SS 431	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	SD 2507	SD F53	Silicone -40°C / +230°C

Min. Air supply
pressure 6 bar.

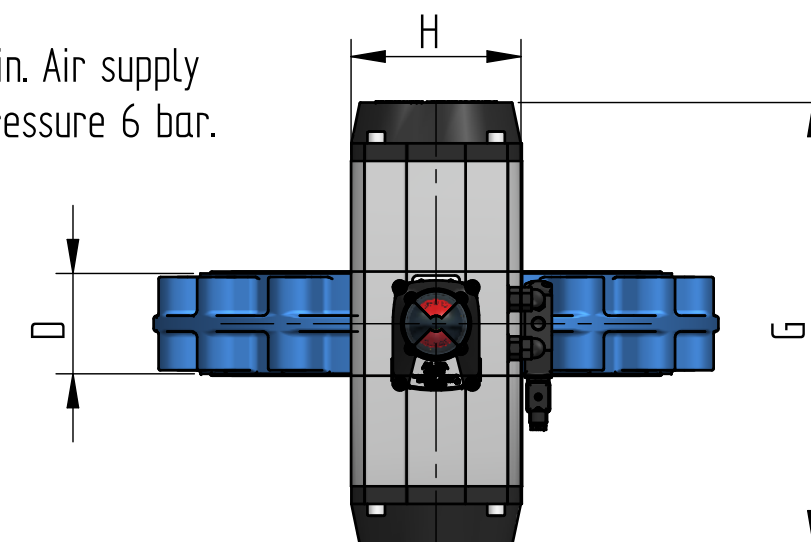

Size	PNEUMATIC	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 350	ALFA - 140 D	340	295	315	78	172	114	385	153	128	324	520	84.7
DN 400	ALFA - 160 D	397	319	350	102	197	114	450	174	144	376	575	118.6
DN 450	ALFA - 190 D	438	353	375	114	230	124	507	206	163	426	635	163.6
DN 500	ALFA - 210 D	489	387	415	127	255	124	562	226	182	475	705	213.6
DN 600	ALFA - 240 D	590	453	562	154	290	124	646	258	219	572	835	324.3
DN 700	ALFA - 270 D	692	491	560	165	320	124	722	292	265	676	905	427.9
DN 800	ALFA - 350 D	792	550	620	190	410	144	866	385	302	772	1012	595.0
DN 900	ALFA - 350 D	861	615	675	203	410	144	866	385	330	840	1120	775.0
DN 1000	ALFA - 350 D	1156	669	735	216	410	144	866	385	374	940	1250	975.0