

LUG TYPE S64 ELECTRIC ACTUATOR






LUG TYPE S64 - ELECTRIC ACTUATOR DN40 - DN200

Size DN 40 to DN 200, Design EN593
Face to face acc. EN558.1 series 13
Flange connections: DIN PN6-10-16-25
ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
Temperature -40/+250°C
Various pressure ratings up to 25 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute

Standard available materials :

BODY	DISC	SHAFT	SEAT
EN-JS1030	BS 1400 AB2	SS 1.4122	NBR -15°C / +80°C
A216 WCB	EN-JS1030	SS 431	EPDM -23°C / +120°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	SD 2507	SD F53	Silicone -40°C / +230°C

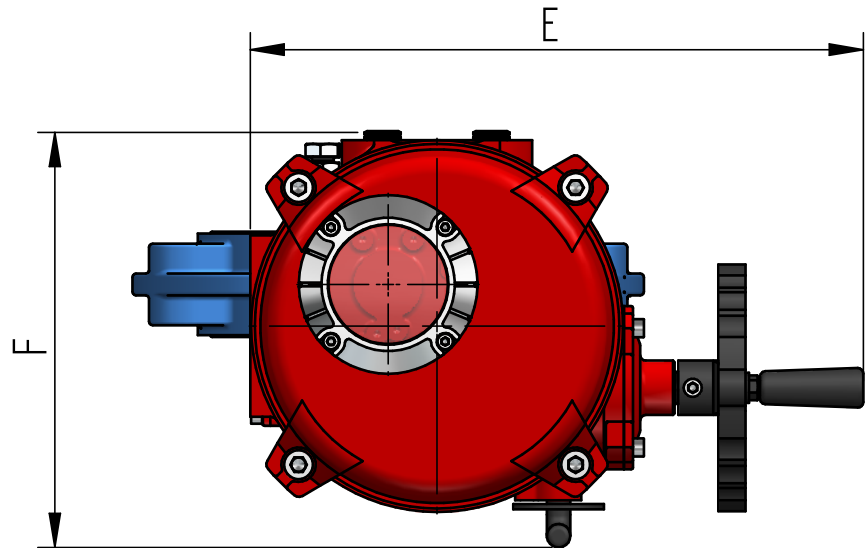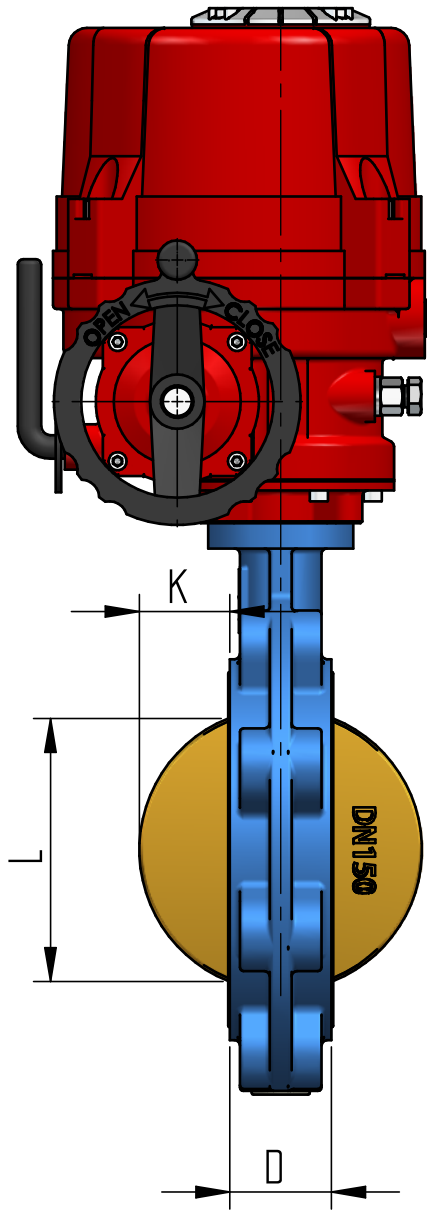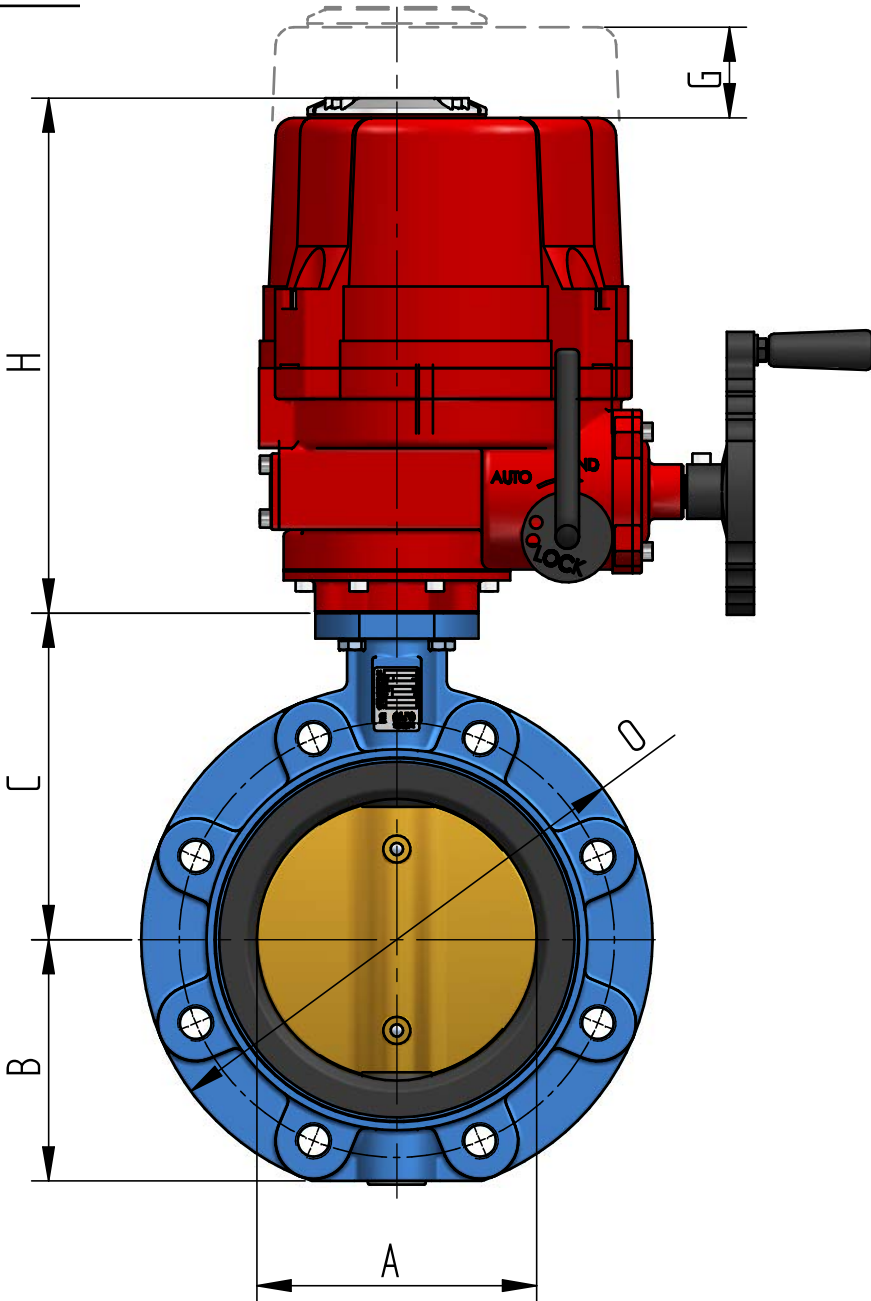




Size	ELECTRIC	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 40	ITQ - 160	41	58	113	33	338	229	140	284	5	27	147	17.6
DN 50	ITQ - 160	52	65	118	43	338	229	140	284	5	31	162	18.8
DN 65	ITQ - 160	63	73	126	46	338	229	140	284	9	45	182	19.7
DN 80	ITQ - 160	78	95	133	46	338	229	140	284	16	64	197	21.3
DN 100	ITQ - 160	103	102	147	52	338	229	140	284	26	90	217	22.9
DN 125	ITQ - 160	125	116	160	56	338	229	140	284	34	110	247	25.4
DN 150	ITQ - 160	155	133	180	56	338	229	140	284	50	146	282	28.0
DN 200	ITQ - 240	201	160	204	60	338	229	140	284	71	194	337	33.2

LUG TYPE S64 - ELECTRIC ACTUATOR DN250 - DN600

Size DN 250 to DN 600, Design EN593
Face to face acc. EN558.1 series 13
Flange connections: DIN PN6-10-16-25
ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K
Temperature -40/+250°C
Various pressure ratings up to 25 bar
Top flange according ISO 5211
Vacuum to 1*10⁻³ 0.2 Torr absolute

Standard available materials :

BODY	DISC	SHAFT	SEAT
EN-JS1030	BS 1400 AB2	SS 14122	NBR -15°C / +80°C
A216 WCB	EN-JS1030	SS 431	EPDM -23°C / +120°C
SS 14408	SS 14408	SS 14462	Viton -0°C / +200°C
BS 1400 AB2	SD 2507	SD F53	Silicone -40°C / +230°C

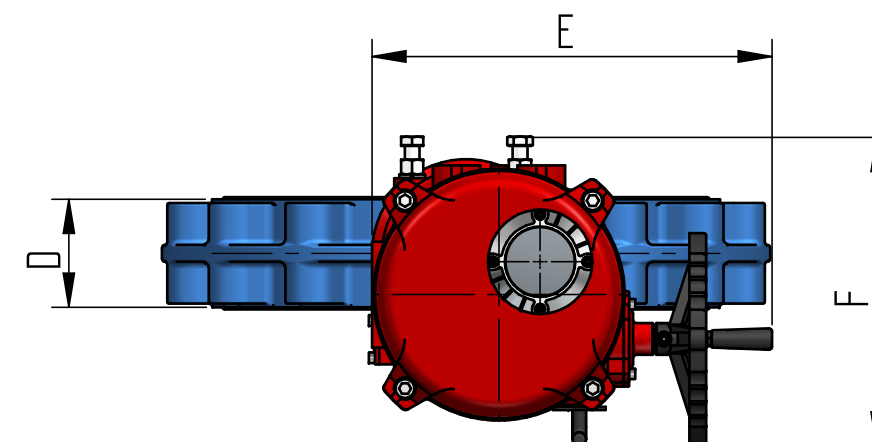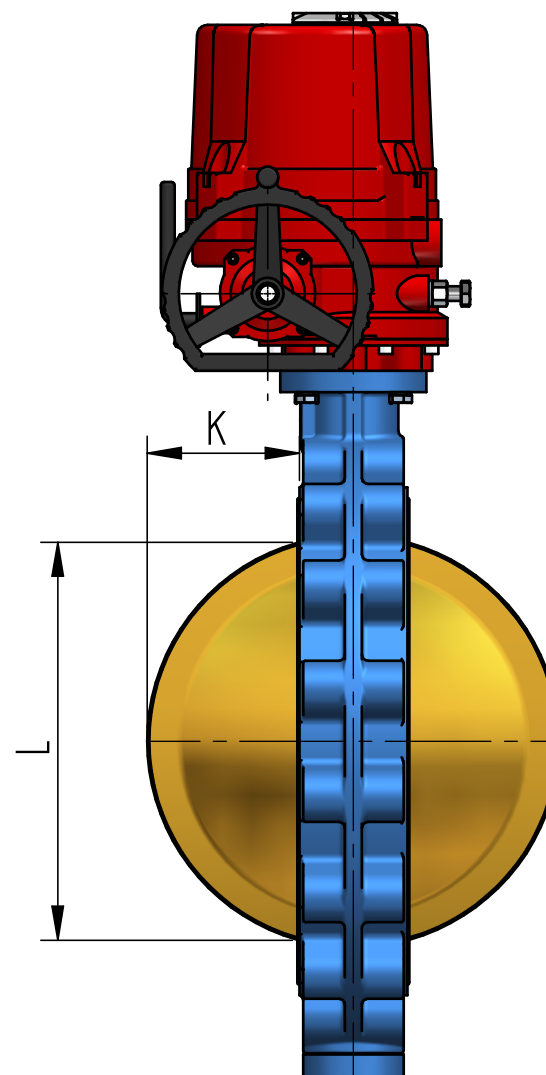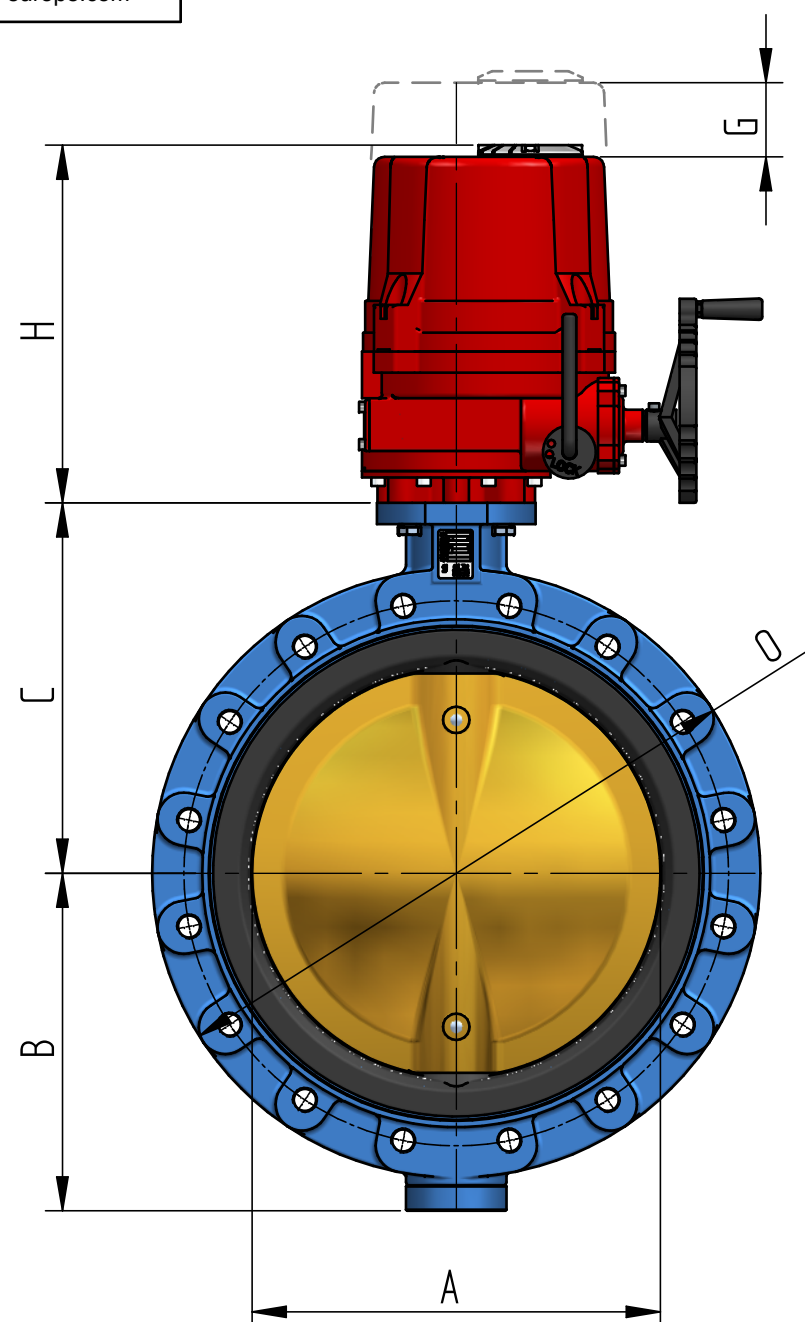

Size	ELECTRIC	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 250	ITQ - 500	249	194	245	68	357	244	170	313	91	241	401	50.7
DN 300	ITQ - 500	302	221	270	78	357	244	170	313	112	291	456	63.9
DN 350	ITQ - 500	340	295	315	78	357	244	170	313	128	325	520	90.4
DN 400	ITQ - 800	397	319	350	102	380	287	195	338	144	377	575	122.4
DN 450	ITQ - 1100	438	353	375	114	380	287	195	338	163	426	635	157.0
DN 500	ITQ - 2000	489	387	415	127	440	375	225	385	182	475	705	212
DN 600	ITQ - 2000	590	453	562	154	440	375	225	385	219	572	835	298