


HP WAFER TYPE S96/3 - TRIPLE ECCENTRIC

PN 40 CLASS 300#

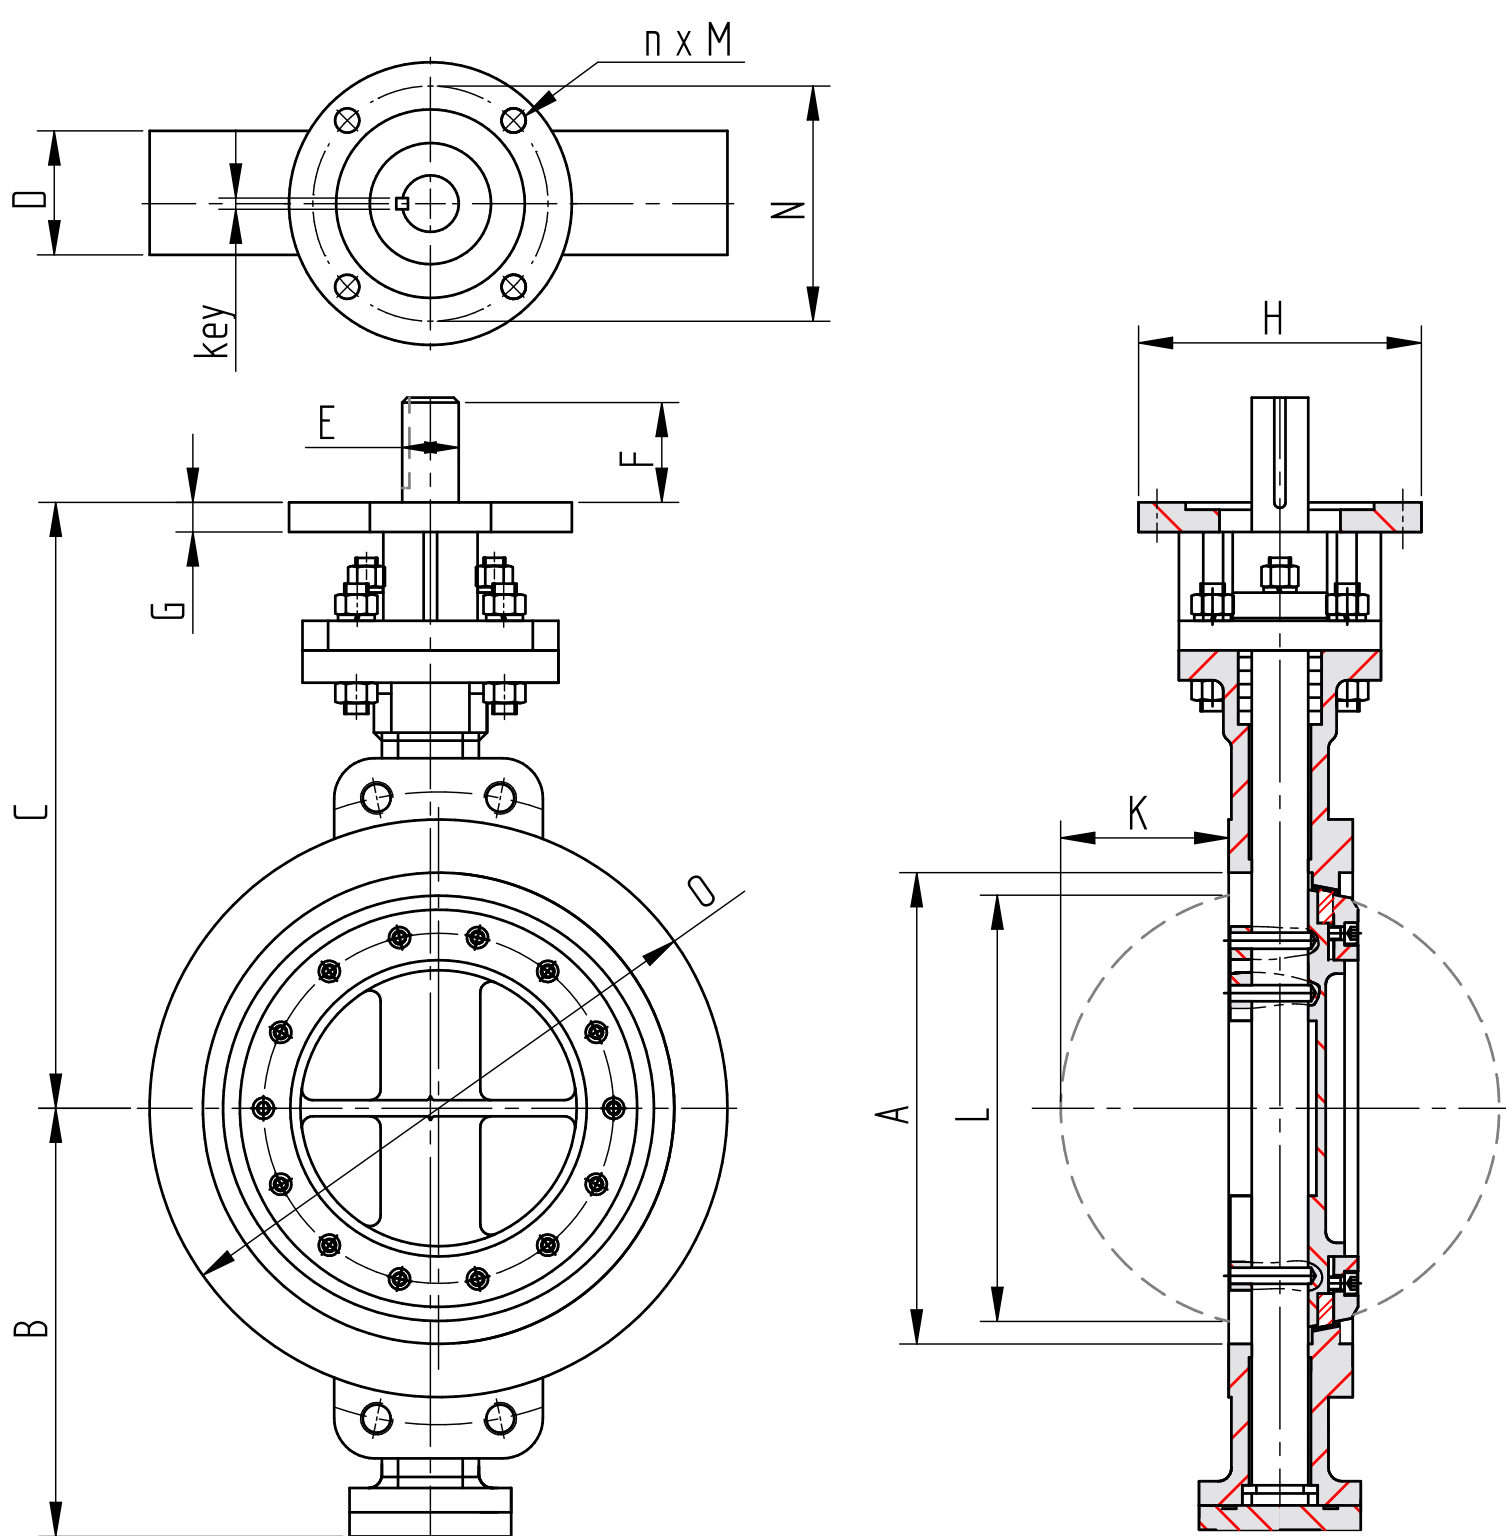

Size	A	B	C	D	E	key	F	G	O	Topflange				L	K	Weight ±
										ISO 5211	H	N	n x M			
DN 50	2"	90	185	43	Ø14	5 x 5	50	12	92	F07	Ø90	Ø70	4x Ø10	28	5	6
DN 65	2.5"	110	225	46	Ø16	5 x 5	50	12	105	F07	Ø90	Ø70	4x Ø10	41	8	7
DN 80	3"	110	205	49	Ø18	6 x 6	50	12	127	F07	Ø90	Ø70	4x Ø10	61	16	9
DN 100	4"	135	235	54	Ø22	6 x 6	60	12	157	F10	Ø125	Ø102	4x Ø12	74	21	17
DN 125	5"	145	265	57	Ø26	8 x 7	60	14	186	F10	Ø125	Ø102	4x Ø12	100	32	20
DN 150	6"	190	285	61	Ø28	8 x 7	65	14	216	F12	Ø150	Ø125	4x Ø14	122	41	32
DN 200	8"	230	330	73	Ø32	10 x 8	70	20	270	F14	Ø175	Ø140	4x Ø18	172	61	55
DN 250	10"	260	360	83	Ø38	10 x 8	70	20	324	F14	Ø175	Ø140	4x Ø18	222	82	72
DN 300	12"	300	420	92	Ø40	12 x 8	100	22	381	F16	Ø210	Ø165	4x Ø22	269	101	100
DN 350	14"	300	455	117	Ø45	14 x 9	100	25	413	F16	Ø210	Ø165	4x Ø22	307	107	130
DN 400	16"	355	490	133	Ø50	14 x 9	115	25	470	F25	Ø300	Ø254	8x Ø18	355	126	180
DN 450	18"	380	525	149	Ø55	16 x 10	115	27	533	F25	Ø300	Ø254	8x Ø18	401	140	240
DN500	20"	415	590	159	Ø65	18 x 11	130	27	584	F30	Ø350	Ø298	8x Ø22	448	159	285
DN600	24"	480	650	181	Ø75	20 x 12	130	27	692	F30	Ø350	Ø298	8x Ø22	544	200	480
DN700	28"	485	680	229	Ø85	22 x 14	145	30	787	F35	Ø415	Ø356	8x Ø33	630	221	630
DN800	32"	540	755	254	Ø95	25 x 14	175	30	902	F40	Ø475	Ø406	8x Ø39	727	258	810
DN900	36"	605	830	254	Ø110	28 x 16	175	32	1010	F40	Ø475	Ø406	8x Ø39	844	338	1150
DN1000	40"	660	890	300	Ø135	36 x 20	190	35	1114	F48	Ø560	Ø483	8x Ø39	937	375	1750
DN1200	48"	770	1005	360	Ø155	40 x 22	190	35	1327	F48	Ø560	Ø483	8x Ø39	1132	453	2250