


HP LUG TYPE S97/3 - TRIPLE ECCENTRIC

PN10 / PN16 CLASS 150#

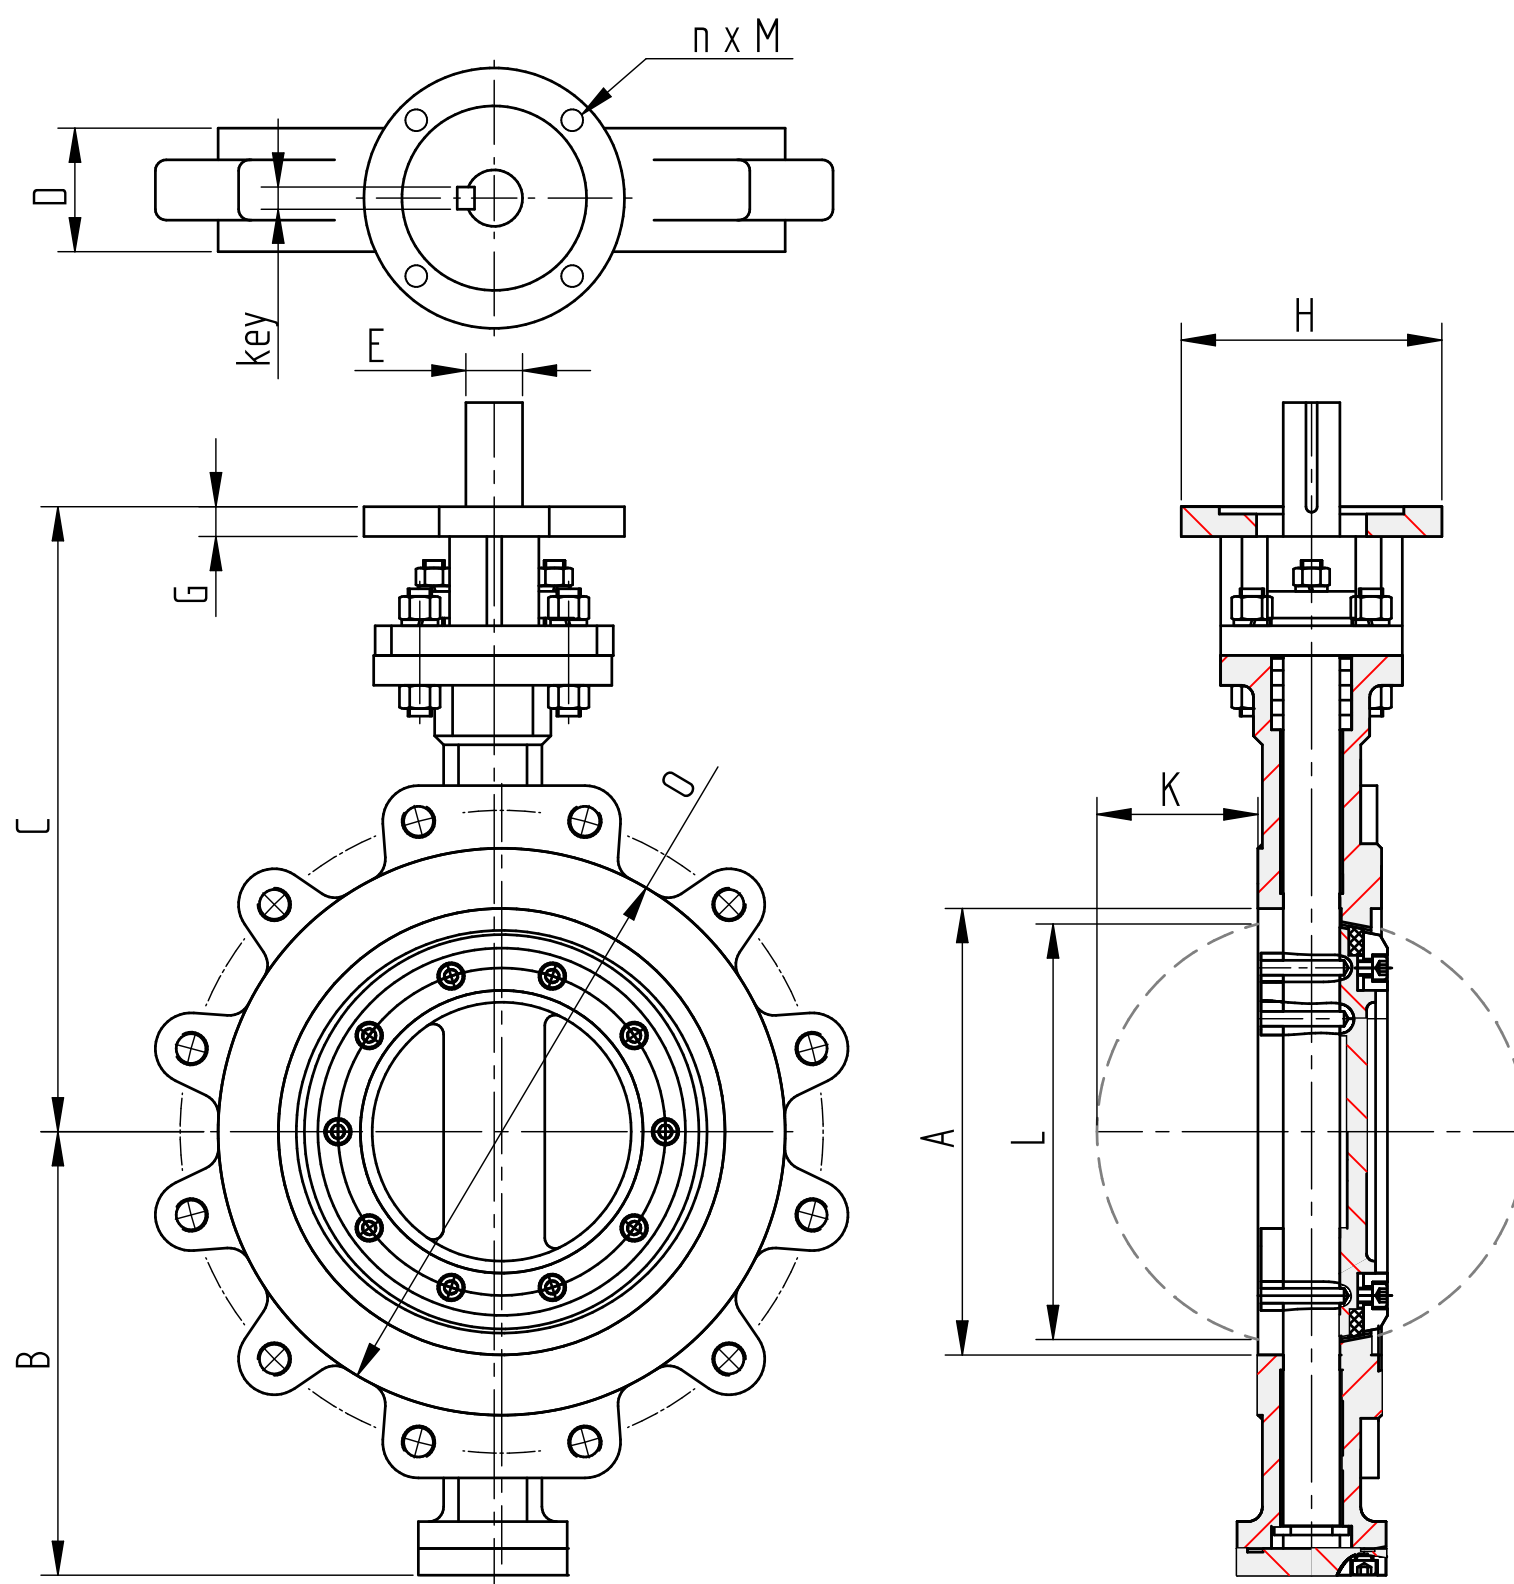

Size	A	B	C	D	E	key	F	G	O	Topflange				L	K	Weight ±
										ISO 5211	H	N	n x M			
DN 50	2"	90	185	43	Ø14	5 x 5	50	12	92	F07	Ø90	Ø70	4x Ø10	28	5	7
DN 65	2.5"	85	195	46	Ø14	5 x 5	50	12	1005	F07	Ø90	Ø70	4x Ø10	45	10	8
DN 80	3"	110	205	48	Ø16	5 x 5	50	12	127	F07	Ø90	Ø70	4x Ø10	61	16	11
DN 100	4"	135	235	54	Ø18	6 x 6	50	12	157	F07	Ø90	Ø70	4x Ø10	74	21	15
DN 125	5"	145	265	57	Ø22	6 x 6	60	14	186	F10	Ø125	Ø102	4x Ø12	100	32	23
DN 150	6"	190	285	57	Ø26	8 x 7	60	14	216	F10	Ø125	Ø102	4x Ø12	124	43	28
DN 200	8"	230	330	64	Ø28	8 x 7	65	20	270	F12	Ø150	Ø125	4x Ø14	176	66	45
DN 250	10"	260	360	71	Ø32	10 x 8	65	20	324	F12	Ø150	Ø125	4x Ø14	225	86	60
DN 300	12"	300	420	81	Ø38	10 x 8	70	22	381	F14	Ø175	Ø140	4x Ø18	271	105	95
DN 350	14"	320	455	92	Ø40	12 x 8	100	25	413	F16	Ø210	Ø165	4x Ø22	318	126	102
DN 400	16"	355	490	102	Ø45	14 x 9	100	25	470	F16	Ø210	Ø165	4x Ø22	367	146	140
DN 450	18"	380	525	114	Ø50	14 x 9	115	27	533	F25	Ø300	Ø254	8x Ø18	417	158	190
DN500	20"	415	590	127	Ø55	16 x 10	115	27	584	F25	Ø300	Ø254	8x Ø18	463	185	235
DN600	24"	480	650	154	Ø65	18 x 11	115	27	692	F25	Ø300	Ø254	8x Ø18	551	211	320
DN700	28"	485	680	165	Ø75	20 x 12	130	30	762	F30	Ø350	Ø298	8x Ø22	653	260	450
DN800	32"	540	550	190	Ø85	22 x 14	130	30	813	F30	Ø350	Ø298	8x Ø22	746	290	740
DN900	36"	605	755	203	Ø95	25 x 14	145	32	972	F35	Ø415	Ø356	8x Ø33	844	338	900
DN1000	40"	660	890	216	Ø110	28 x 16	175	35	1080	F40	Ø475	Ø406	8x Ø39	937	375	1150
DN1200	48"	770	1005	254	Ø135	36 x 20	175	35	1289	F40	Ø475	Ø406	8x Ø39	1132	453	1700