


HP DBL FLG TYPE S98/3 - TRIPLE ECCENTRIC

PN10 / PN16 CLASS 150#

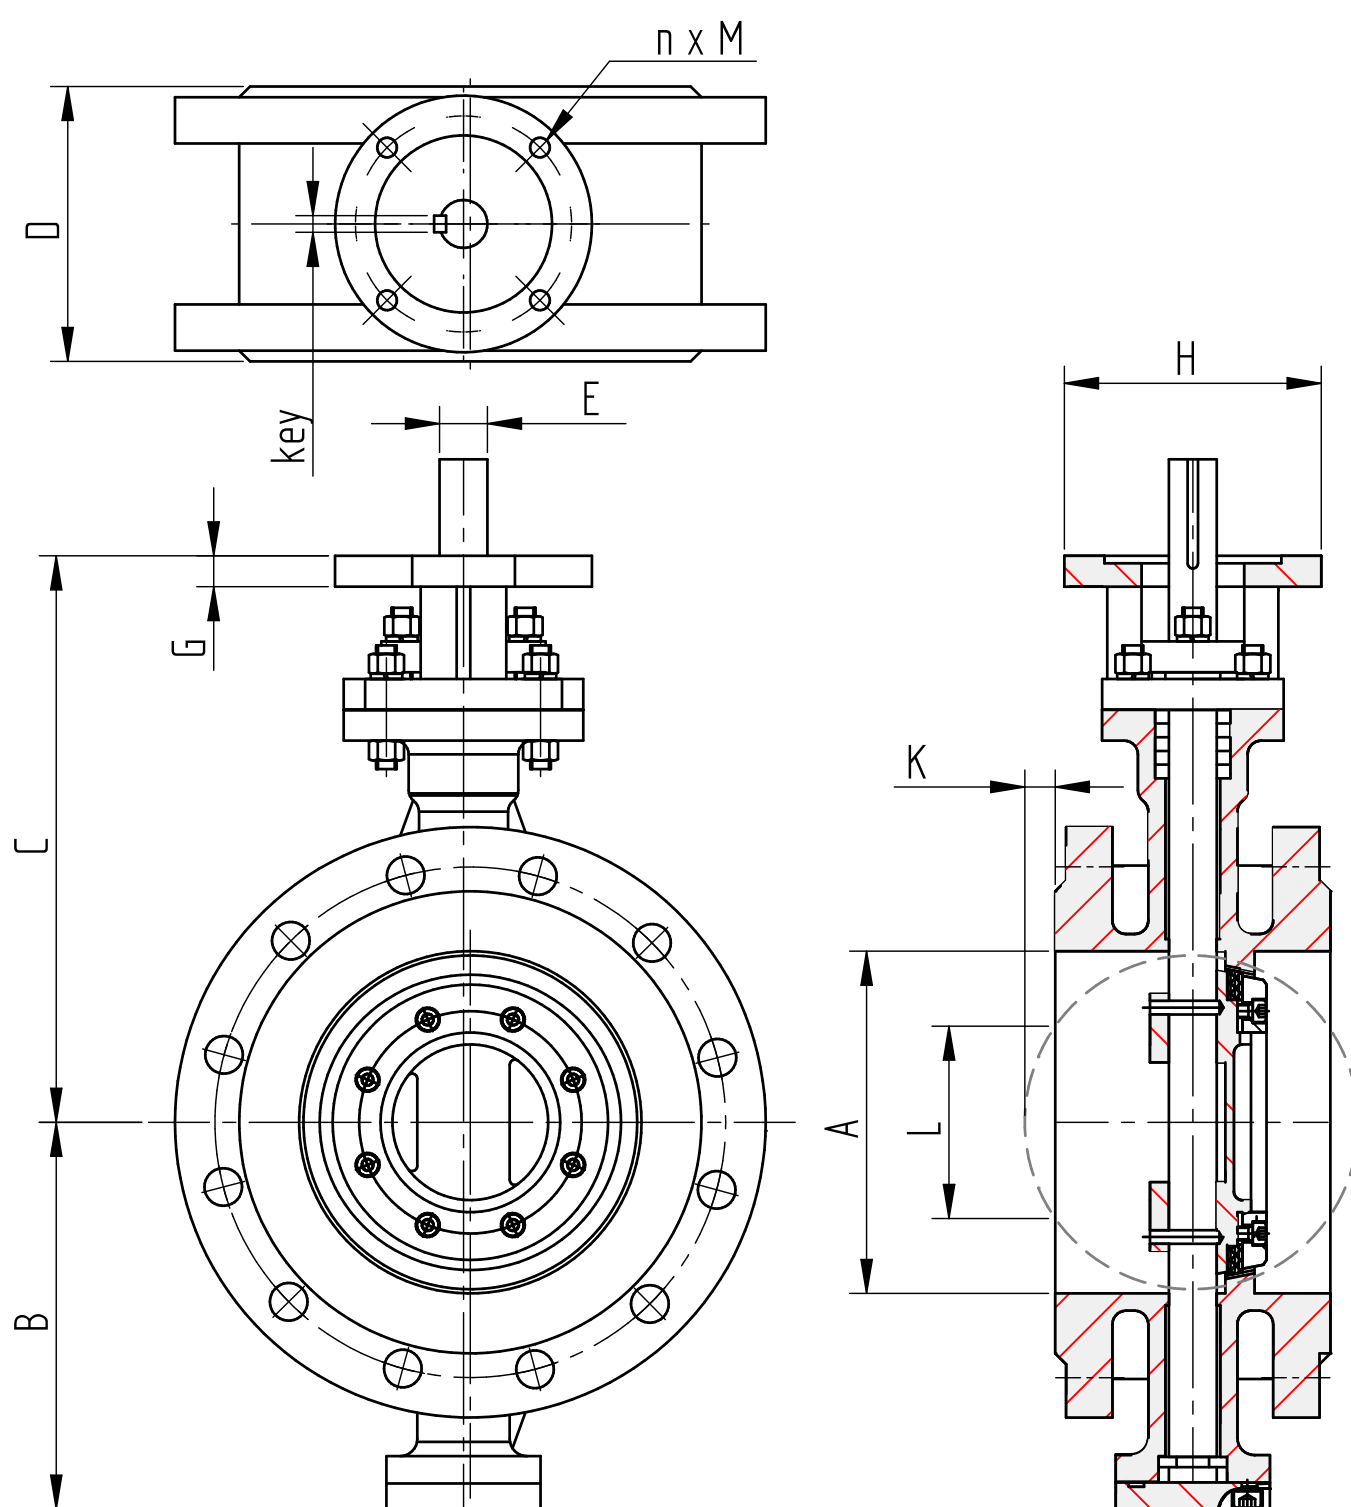

Size	A	B	C	D	E	key	F	G	O	Topflange				L	K	Weight ±
										ISO 5211	H	N	n x M			
DN 50	2"	90	185	108	Ø14	5 x 5	50	12	92	F07	Ø90	Ø70	4x Ø10	--	--	9
DN 65	2.5"	105	200	112	Ø14	5 x 5	50	12	105	F07	Ø90	Ø70	4x Ø10	--	--	13
DN 80	3"	110	205	114	Ø16	5 x 5	50	12	127	F07	Ø90	Ø70	4x Ø10	--	--	16
DN 100	4"	135	235	127	Ø18	6 x 6	50	12	157	F07	Ø90	Ø70	4x Ø10	--	--	18
DN 125	5"	145	265	140	Ø22	6 x 6	60	14	186	F10	Ø125	Ø102	4x Ø12	--	--	29
DN 150	6"	190	285	140	Ø26	8 x 7	60	14	216	F10	Ø125	Ø102	4x Ø12	47	4	38
DN 200	8"	230	330	152	Ø28	8 x 7	65	20	270	F12	Ø150	Ø125	4x Ø14	122	25	65
DN 250	10"	260	360	165	Ø32	10 x 8	65	20	324	F12	Ø150	Ø125	4x Ø14	177	44	80
DN 300	12"	300	420	178	Ø38	10 x 8	70	22	381	F14	Ø175	Ø140	4x Ø18	233	64	120
DN 350	14"	320	455	190	Ø40	12 x 8	100	25	413	F16	Ø210	Ø165	4x Ø22	282	82	160
DN 400	16"	355	490	216	Ø45	14 x 9	100	25	470	F16	Ø210	Ø165	4x Ø22	326	95	200
DN 450	18"	380	525	222	Ø50	14 x 9	115	27	533	F25	Ø300	Ø254	8x Ø18	379	115	220
DN500	20"	415	590	229	Ø55	16 x 10	115	27	584	F25	Ø300	Ø254	8x Ø18	431	140	280
DN600	24"	480	650	267	Ø65	18 x 11	115	27	692	F25	Ø300	Ø254	8x Ø18	522	171	400
DN700	28"	485	680	292	Ø75	20 x 12	130	30	762	F30	Ø350	Ø298	8x Ø22	623	203	540
DN800	32"	540	550	318	Ø85	22 x 14	130	30	813	F30	Ø350	Ø298	8x Ø22	710	230	760
DN900	36"	605	755	330	Ø95	25 x 14	145	32	972	F35	Ø415	Ø356	8x Ø33	808	271	940
DN1000	40"	660	890	410	Ø110	28 x 16	175	35	1080	F40	Ø475	Ø406	8x Ø39	885	283	1350
DN1200	48"	770	1005	470	Ø135	36 x 20	175	35	1289	F40	Ø475	Ø406	8x Ø39	1070	351	1986