


HP DBL FLG TYPE S98/3 - TRIPLE ECCENTRIC

PN 40 CLASS 300#

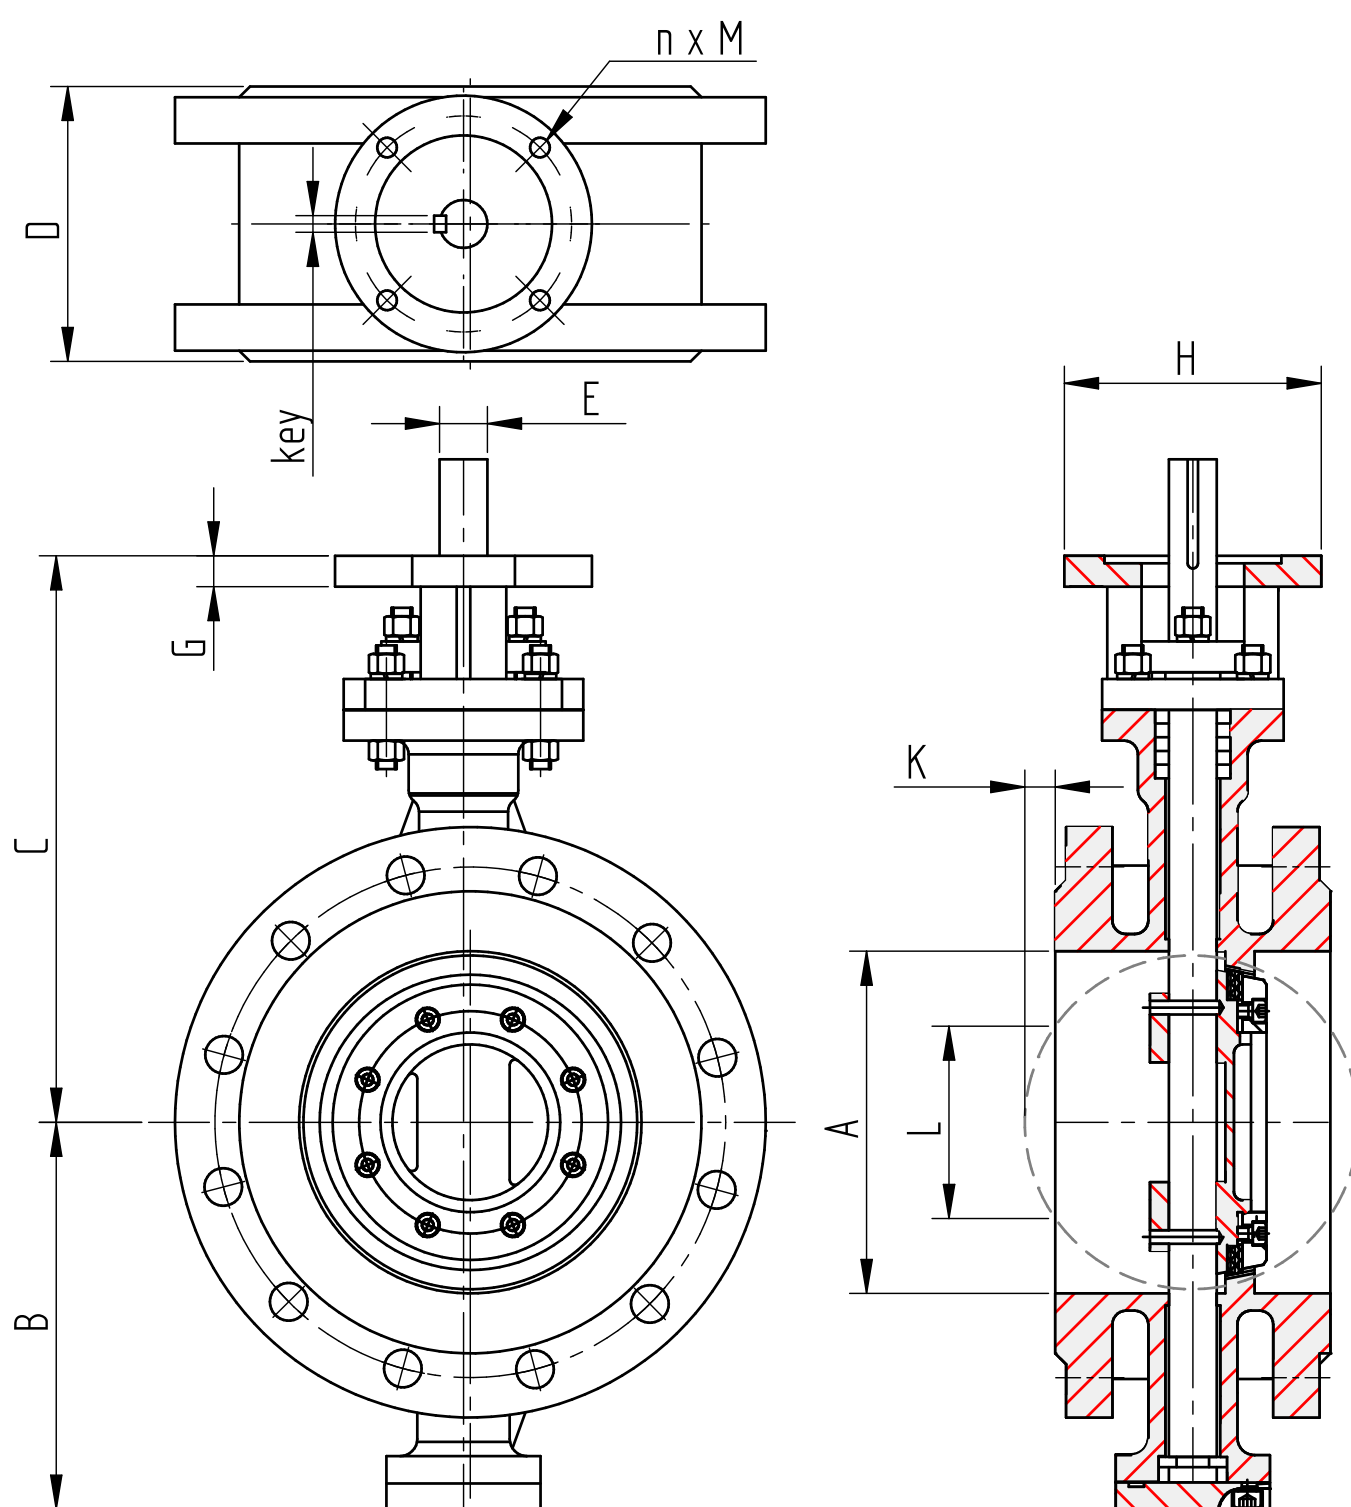

Size	A	B	C	D	E	key	F	G	O	Topflange				L	K	Weight ±
										ISO 5211	H	N	n x M			
DN 50	2"	90	185	108	Ø14	5 x 5	50	12	92	F07	Ø90	Ø70	4x Ø10	--	--	13
DN 65	2.5"	110	225	112	Ø16	5 x 5	50	12	105	F07	Ø90	Ø70	4x Ø10	--	--	17
DN 80	3"	110	205	114	Ø18	6 x 6	50	12	127	F07	Ø90	Ø70	4x Ø10	--	--	23
DN 100	4"	135	235	127	Ø22	6 x 6	60	12	157	F10	Ø125	Ø102	4x Ø12	--	--	35
DN 125	5"	145	265	140	Ø26	8 x 7	60	14	186	F10	Ø125	Ø102	4x Ø12	--	--	45
DN 150	6"	190	285	140	Ø28	8 x 7	65	20	216	F12	Ø150	Ø125	4x Ø14	38	3	60
DN 200	8"	230	330	152	Ø32	10 x 8	70	22	270	F14	Ø175	Ø140	4x Ø18	122	22	90
DN 250	10"	260	360	165	Ø38	10 x 8	70	22	324	F14	Ø175	Ø140	4x Ø18	181	40	142
DN 300	12"	300	420	178	Ø40	12 x 8	100	25	381	F16	Ø210	Ø165	4x Ø22	235	59	192
DN 350	14"	300	455	190	Ø45	14 x 9	100	25	413	F16	Ø210	Ø165	4x Ø22	274	69	240
DN 400	16"	355	490	216	Ø50	14 x 9	115	27	470	F25	Ø300	Ø254	8x Ø18	324	87	365
DN 450	18"	380	525	222	Ø55	16 x 10	115	27	533	F25	Ø300	Ø254	8x Ø18	380	109	450
DN500	20"	415	590	229	Ø65	18 x 11	130	30	584	F30	Ø350	Ø298	8x Ø22	433	135	590
DN600	24"	480	650	267	Ø75	20 x 12	130	30	692	F30	Ø350	Ø298	8x Ø22	516	152	850
DN700	28"	485	680	292	Ø85	22 x 14	145	32	787	F35	Ø415	Ø356	8x Ø33			930
DN800	32"	540	755	318	Ø95	25 x 14	175	35	902	F40	Ø475	Ø406	8x Ø39	625	155	1480
DN900	36"	605	830	330	Ø110	28 x 16	175	35	1010	F40	Ø475	Ø406	8x Ø39	729	190	1800
DN1000	40"	660	890	410	Ø135	36 x 20	190	40	1114	F48	Ø560	Ø483	8x Ø39			2750
DN1200	48"	770	1005	470	Ø155	40 x 22	190	40	1327	F48	Ø560	Ø483	8x Ø39			3100