


HP LUG TYPE S97/3 - TRIPLE ECCENTRIC

PN 40 CLASS 300#

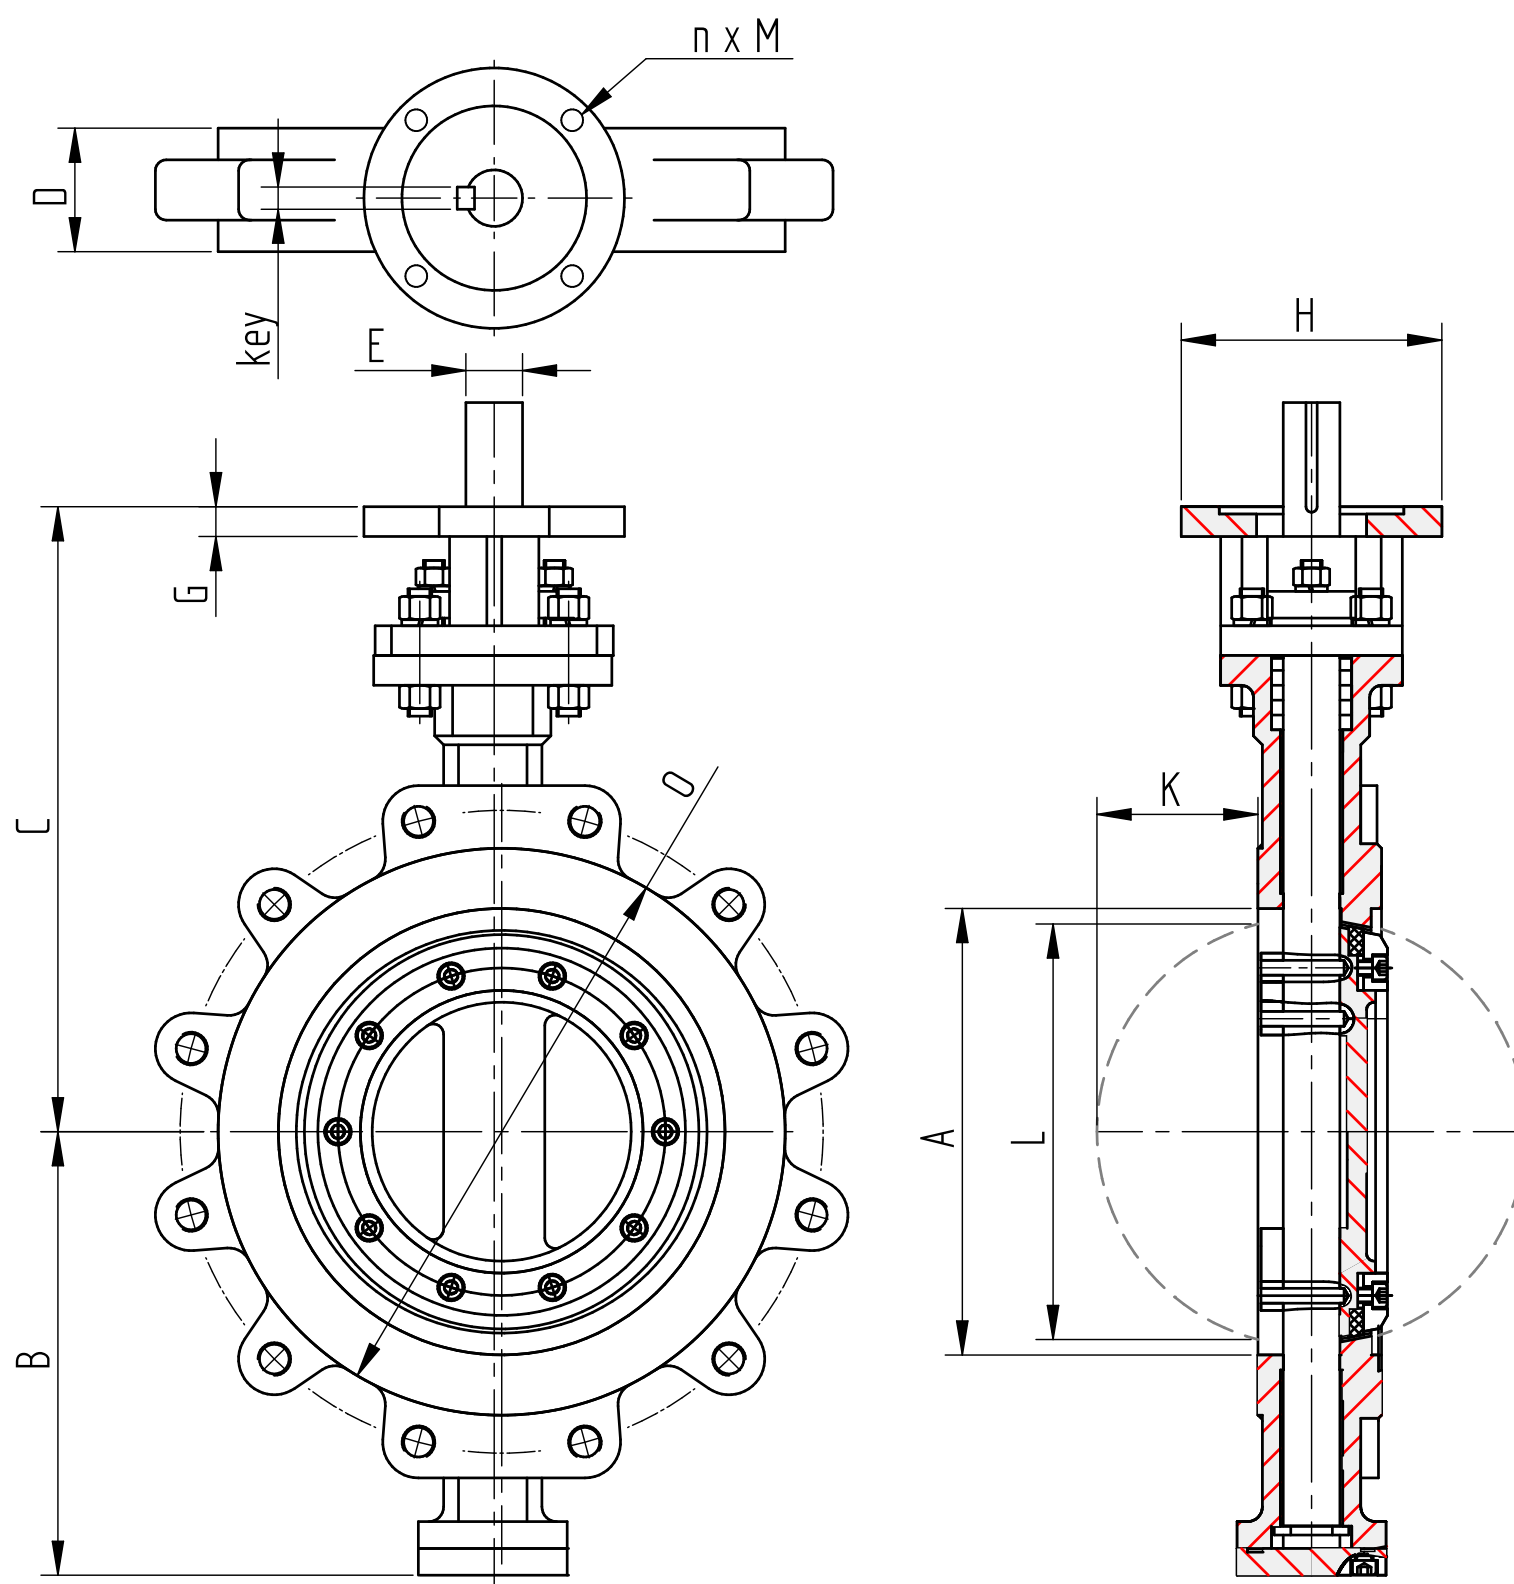

Size	A	B	C	D	E	key	F	G	O	Topflange				L	K	Weight ±
										ISO 5211	H	N	n x M			
DN 50	2"	90	185	43	ø14	5 x 5	50	12	92	F07	ø90	ø70	4x ø10	28	5	8
DN 65	2.5"	110	225	46	ø16	5 x 5	50	12	105	F07	ø90	ø70	4x ø10	41	8	11
DN 80	3"	110	205	49	ø18	6 x 6	50	12	127	F07	ø90	ø70	4x ø10	61	16	15
DN 100	4"	135	235	54	ø22	6 x 6	60	12	157	F10	ø125	ø102	4x ø12	74	21	24
DN 125	5"	145	265	57	ø26	8 x 7	60	14	186	F10	ø125	ø102	4x ø12	100	32	30
DN 150	6"	190	285	61	ø28	8 x 7	65	20	216	F12	ø150	ø125	4x ø14	122	41	45
DN 200	8"	230	330	73	ø32	10 x 8	70	22	270	F14	ø175	ø140	4x ø18	172	61	65
DN 250	10"	260	360	83	ø38	10 x 8	70	22	324	F14	ø175	ø140	4x ø18	222	82	90
DN 300	12"	300	420	92	ø40	12 x 8	100	25	381	F16	ø210	ø165	4x ø22	269	101	145
DN 350	14"	300	455	117	ø45	14 x 9	100	25	413	F16	ø210	ø165	4x ø22	307	107	180
DN 400	16"	355	490	133	ø50	14 x 9	115	27	470	F25	ø300	ø254	8x ø18	355	126	250
DN 450	18"	380	525	149	ø55	16 x 10	115	27	533	F25	ø300	ø254	8x ø18	401	140	340
DN500	20"	415	590	159	ø65	18 x 11	130	30	584	F30	ø350	ø298	8x ø22	448	159	440
DN600	24"	480	650	181	ø75	20 x 12	130	30	592	F30	ø350	ø298	8x ø22	554	200	650
DN700	28"	485	680	229	ø85	22 x 14	145	32	787	F35	ø415	ø356	8x ø33	630	221	780
DN800	32"	540	755	254	ø95	25 x 14	175	35	902	F40	ø475	ø406	8x ø39	727	258	970
DN900	36"	605	830	254	ø110	28 x 16	175	35	1010	F40	ø475	ø406	8x ø39	844	338	1250
DN1000	40"	660	890	300	ø135	36 x 20	190	40	1114	F48	ø560	ø483	8x ø39	937	375	2000
DN1200	48"	770	1005	360	ø155	40 x 22	190	40	1327	F48	ø560	ø483	8x ø39	1132	453	2500